

**Charger**

# **TETRA TECH, INC.**

By: RH Date: 11/8/2016 Subject: Charger Highway  
Checked By: JB Date: 11/10/2016 PCSM Design and Evaluation

---

## **PURPOSE:**

The purpose of these calculations is to design a Post-Construction Stormwater Management (PCSM) Plan for the Charger Highway block valve site as part of the Sunoco Pipeline L.P. Pennsylvania Pipeline Project. The site is located within Blair Township, Blair County, Pennsylvania. Permanent stormwater controls will be developed to satisfy PADEP and Blair Township's approved Act 167 Plan.

## **PCSM DESIGN REQUIREMENTS:**

The PCSM design for this project follows the PA Department of Environmental Protection's (PADEP) Pennsylvania Stormwater Best Management Practices Manual (BMP Manual), December 2006; and the standard design criteria from PA Title 25, Chapter 102.8.(g)(2) and (3). The design criteria evaluated for the site are summarized below.

### **Act 167 Consistency**

The Charger Highway block valve site is located in Blair County, which does not have a county-wide Act 167 plan adopted. However, Blair Township has enacted the Beaverdam Branch Watershed Act 167 Stormwater Management Plan. This plan requires that the post-development runoff rate be less than or equal to the pre-development rate. The PCSM design at the Charger Highway block valve site has been designed for consistency with Blair Township's approved Act 167 Plan.

### **Recommended Volume Control Guideline**

Use of Control Guideline 1 is recommended where site conditions offer the opportunity to reduce the increase in runoff volume as follows:

- Do not increase the post-development total runoff volume for all storms equal to or less than the two-year/24-hour event;
- Existing (pre-development) non-forested pervious areas must be considered meadow (good condition) or its equivalent; and
- 20 percent of existing impervious area, when present, shall be considered meadow (good condition) or its equivalent.

Due to the presence of rapid surface infiltration rates and shallow bedrock surrounding the Charger Highway block valve site, it is not possible to infiltrate the 2-year/24-hour stormwater runoff volume increase. Volume reducing BMPs in the PADEP Stormwater BMP Manual were analyzed on a case-by-case basis but did not meet their respective requirements. As a result, two slow-release BMPs have been proposed.

### **Recommended Peak Rate Control Guideline**

The recommended control guideline for peak rate control is:

- Do not increase the peak rate of discharge for the 2-year through 100-year events (at minimum); as necessary, provide additional peak rate control as required by applicable and approved Act 167 plan. The Blair Township Act 167 rate requirements mirror PADEP's requirements. Therefore, no additional peak rate control is required under the Act 167 Plan.

This site will utilize two slow release trenches to manage the two-year through 100-year peak rate increases. These BMPs will also help to increase the time of concentration for the drainage area encompassing the block valve.

### **Recommended Water Quality Control Guideline**

Control Guideline 1 will provide water quality control and stream channel protection as well as flood control protection.

#### **Infiltration**

Infiltration rates for the PCSM BMPs have been determined from site infiltration testing conducted in accordance of the PA BMP Manual. Documentation for infiltration testing and design infiltration rates can be found in Attachment 5 of the Site Restoration/Post Construction Stormwater Management Plan. Infiltration test locations and recommended design rates are also labeled on the PCSM Plan Drawings in Attachment 6.

During the onsite infiltration tests, the depth to seasonal high groundwater and shallow bedrock or another confining layer were evaluated. Due to the presence of shallow bedrock, as well as rapid infiltration at the site, it is not possible to maintain 2 feet of separation between a volume-reducing BMP and bedrock.

The post-construction stormwater management design utilizes two slow-release BMPs to manage runoff volume due to rapid infiltration onsite and due to the presence of shallow bedrock.

#### **Loading Ratio**

The loading ratio guidelines do not apply because the design does not propose an infiltration BMP.

#### **Disturbed Area**

To meet Standard Worksheet 10 guidelines, 90% of the disturbed area is contained by the proposed PCSM BMPs.

#### **Karst Topography**


The Charger Highway block valve site is located within the vicinity of known depressions or sinkholes. Several design principles were incorporated to minimize the risk of sinkholes to the maximum extent practicable, including reducing the proposed impervious area to the maximum extent practicable.

Stormwater runoff from the site is managed using a slow-release BMP. This type of BMP will mimic the normal baseflow hydrology. This BMP will collect, store and filter captured runoff through a water quality media and slowly release the treated volume through an underdrain. Utilization of a slow-release BMP will reduce the risks associated with karst topography.

Additional post-construction inspection and maintenance will be required onsite as documented in the Sinkhole Repair Plan in Attachment 2. In areas of known karst terrain, stormwater BMPs shall be inspected at regular intervals of at least once every quarter for the first two years following installation and then at regular periods thereafter. Inspections shall also be made after every storm event greater than 1 inch during the establishment period. Inspections shall consist of an examination of any noticeable subsidence, surface depressions, or sinkholes. Inspections shall include an evaluation of all inlet and outlet structures and document any areas to be cleaned, maintained, or repaired.

### **Special Protection Watershed**


The Charger Highway block valve site is not located within a special protection watershed, so antidegradation requirements do not apply.

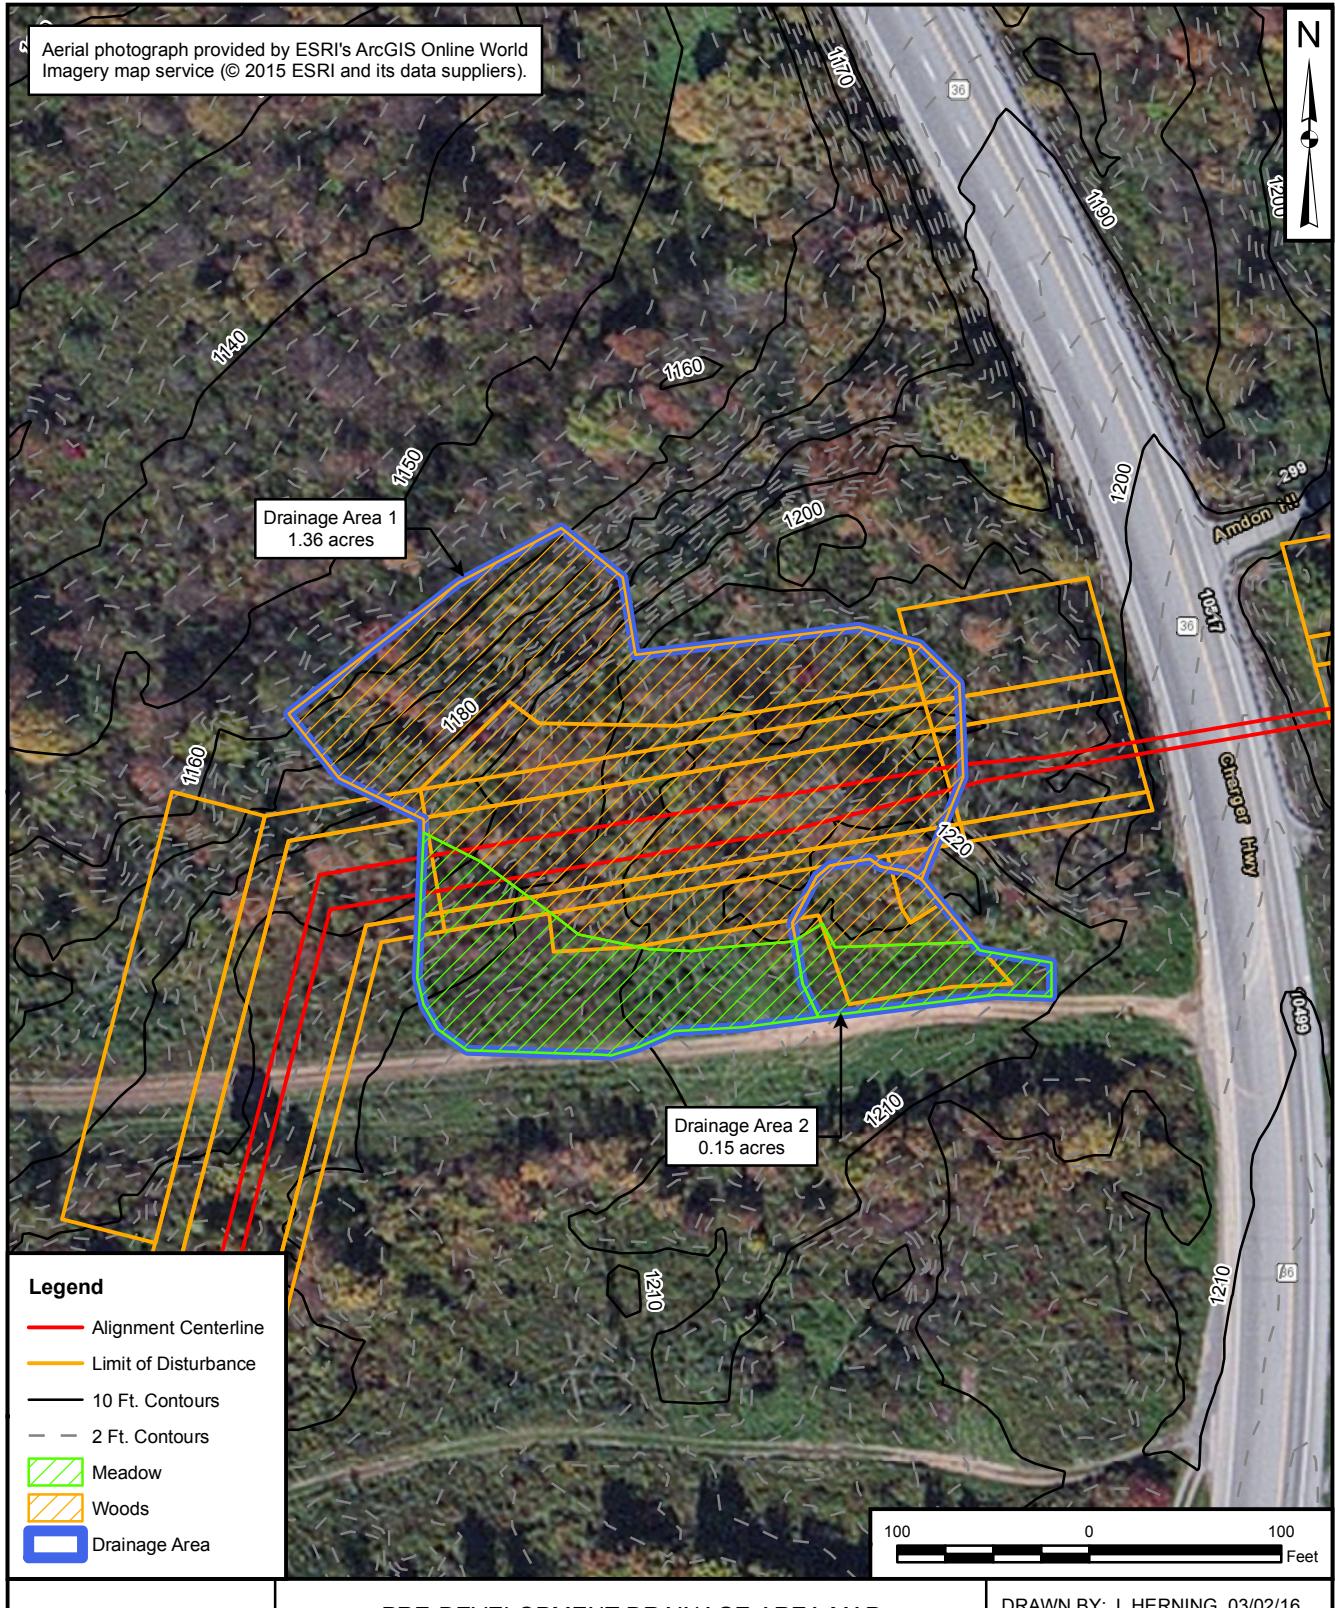

PRE-DEVELOPMENT DRAINAGE AREA MAP  
CHARGER HIGHWAY  
PENNSYLVANIA PIPELINE PROJECT  
SUNOCO LOGISTICS, L.P.  
BLAIR COUNTY, PENNSYLVANIA

DRAWN BY: J. HERNING 03/02/16  
CHECKED BY: J. BRODY 11/09/16  
APPROVED BY:  
CONTRACT NUMBER: 112IC05958

FIGURE NUMBER	1	REV 0
---------------	---	----------

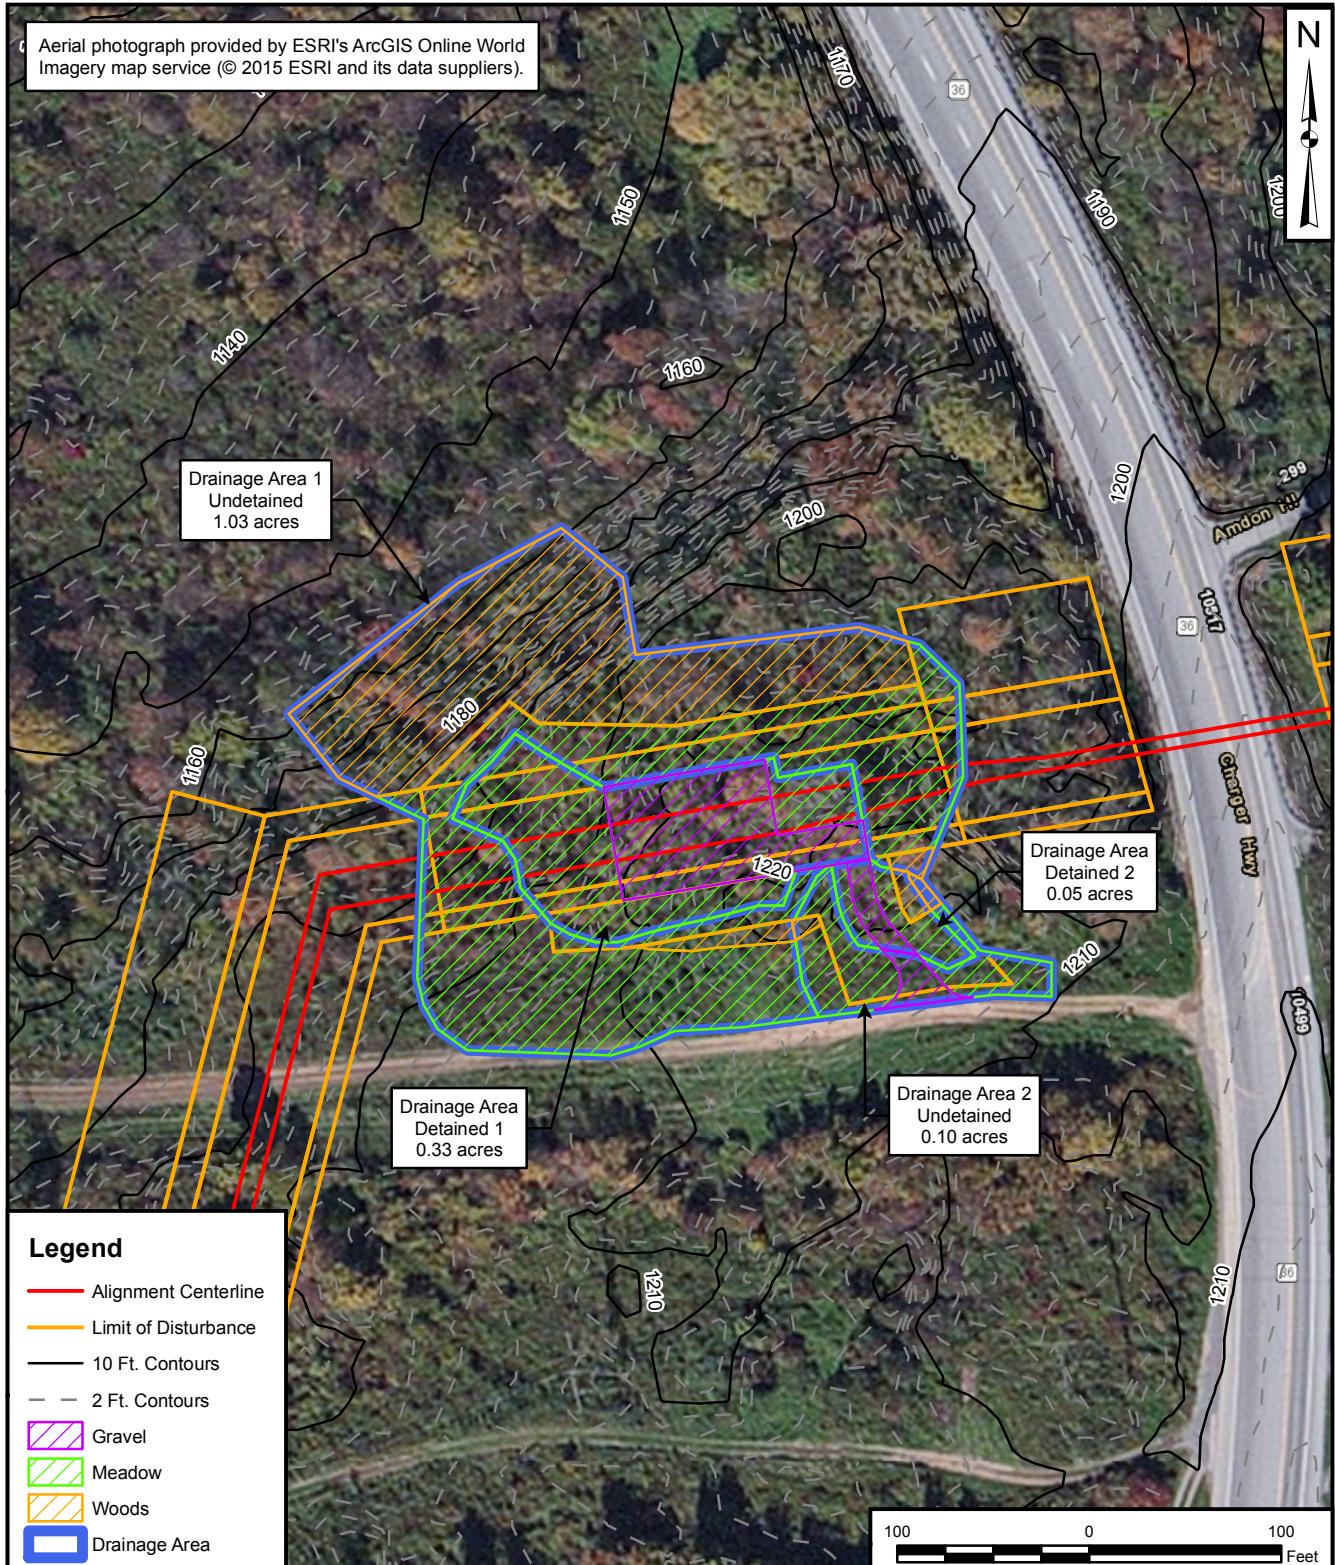

POST-DEVELOPMENT DRAINAGE AREA MAP  
CHARGER HIGHWAY  
PENNSYLVANIA PIPELINE PROJECT  
SUNOCO LOGISTICS, L.P.  
BLAIR COUNTY, PENNSYLVANIA

DRAWN BY: J. HERNING 03/02/16  
CHECKED BY: J. BRODY 11/09/16  
APPROVED BY:  
CONTRACT NUMBER: 112IC05958

FIGURE NUMBER	2	REV
	0	



**NOAA Atlas 14, Volume 2, Version 3**  
**Location name: Blair Twp, Pennsylvania, USA\***  
**Latitude: 40.4117°, Longitude: -78.3992°**  
**Elevation: 1215.34 ft\*\***  
\* source: ESRI Maps  
\*\* source: USGS



### POINT PRECIPITATION FREQUENCY ESTIMATES

G.M. Bonnin, D. Martin, B. Lin, T. Parzybok, M. Yekta, and D. Riley

NOAA, National Weather Service, Silver Spring, Maryland

[PF tabular](#) | [PF graphical](#) | [Maps & aerials](#)

#### PF tabular

<b>Duration</b>	<b>Average recurrence interval (years)</b>									
	<b>1</b>	<b>2</b>	<b>5</b>	<b>10</b>	<b>25</b>	<b>50</b>	<b>100</b>	<b>200</b>	<b>500</b>	<b>1000</b>
<b>5-min</b>	<b>0.306</b> (0.278-0.339)	<b>0.366</b> (0.332-0.406)	<b>0.447</b> (0.404-0.494)	<b>0.510</b> (0.459-0.564)	<b>0.592</b> (0.529-0.652)	<b>0.657</b> (0.584-0.723)	<b>0.722</b> (0.638-0.793)	<b>0.789</b> (0.693-0.865)	<b>0.882</b> (0.767-0.964)	<b>0.951</b> (0.820-1.04)
<b>10-min</b>	<b>0.475</b> (0.431-0.527)	<b>0.572</b> (0.518-0.634)	<b>0.694</b> (0.627-0.768)	<b>0.787</b> (0.708-0.870)	<b>0.906</b> (0.810-0.998)	<b>0.997</b> (0.885-1.10)	<b>1.09</b> (0.961-1.19)	<b>1.18</b> (1.03-1.29)	<b>1.30</b> (1.13-1.42)	<b>1.38</b> (1.19-1.51)
<b>15-min</b>	<b>0.582</b> (0.529-0.646)	<b>0.699</b> (0.634-0.775)	<b>0.853</b> (0.770-0.943)	<b>0.968</b> (0.871-1.07)	<b>1.12</b> (1.00-1.23)	<b>1.23</b> (1.10-1.36)	<b>1.35</b> (1.19-1.48)	<b>1.47</b> (1.29-1.60)	<b>1.62</b> (1.41-1.77)	<b>1.73</b> (1.49-1.89)
<b>30-min</b>	<b>0.771</b> (0.699-0.855)	<b>0.936</b> (0.848-1.04)	<b>1.17</b> (1.05-1.29)	<b>1.34</b> (1.21-1.49)	<b>1.58</b> (1.41-1.74)	<b>1.76</b> (1.57-1.94)	<b>1.95</b> (1.72-2.14)	<b>2.14</b> (1.88-2.34)	<b>2.40</b> (2.09-2.62)	<b>2.59</b> (2.24-2.83)
<b>60-min</b>	<b>0.941</b> (0.854-1.04)	<b>1.15</b> (1.04-1.27)	<b>1.47</b> (1.32-1.62)	<b>1.71</b> (1.54-1.89)	<b>2.05</b> (1.83-2.26)	<b>2.32</b> (2.06-2.55)	<b>2.61</b> (2.30-2.86)	<b>2.90</b> (2.55-3.18)	<b>3.31</b> (2.88-3.62)	<b>3.64</b> (3.14-3.98)
<b>2-hr</b>	<b>1.08</b> (0.973-1.21)	<b>1.31</b> (1.18-1.46)	<b>1.67</b> (1.50-1.86)	<b>1.96</b> (1.75-2.18)	<b>2.37</b> (2.10-2.62)	<b>2.70</b> (2.38-2.98)	<b>3.06</b> (2.67-3.37)	<b>3.43</b> (2.98-3.78)	<b>3.97</b> (3.40-4.37)	<b>4.40</b> (3.74-4.84)
<b>3-hr</b>	<b>1.17</b> (1.06-1.30)	<b>1.41</b> (1.28-1.57)	<b>1.79</b> (1.61-1.98)	<b>2.09</b> (1.88-2.31)	<b>2.53</b> (2.25-2.78)	<b>2.88</b> (2.56-3.17)	<b>3.27</b> (2.87-3.58)	<b>3.68</b> (3.21-4.02)	<b>4.26</b> (3.67-4.66)	<b>4.74</b> (4.04-5.17)
<b>6-hr</b>	<b>1.46</b> (1.33-1.63)	<b>1.76</b> (1.60-1.96)	<b>2.21</b> (1.99-2.44)	<b>2.57</b> (2.31-2.84)	<b>3.09</b> (2.75-3.40)	<b>3.52</b> (3.11-3.86)	<b>3.97</b> (3.49-4.36)	<b>4.46</b> (3.89-4.89)	<b>5.17</b> (4.45-5.64)	<b>5.74</b> (4.89-6.26)
<b>12-hr</b>	<b>1.80</b> (1.63-2.01)	<b>2.16</b> (1.96-2.41)	<b>2.69</b> (2.44-2.99)	<b>3.13</b> (2.82-3.47)	<b>3.77</b> (3.37-4.17)	<b>4.31</b> (3.82-4.75)	<b>4.89</b> (4.31-5.38)	<b>5.52</b> (4.81-6.06)	<b>6.43</b> (5.54-7.05)	<b>7.19</b> (6.12-7.87)
<b>24-hr</b>	<b>2.22</b> (2.03-2.43)	<b>2.66</b> (2.44-2.92)	<b>3.30</b> (3.03-3.62)	<b>3.83</b> (3.50-4.19)	<b>4.60</b> (4.18-5.01)	<b>5.24</b> (4.73-5.70)	<b>5.91</b> (5.31-6.42)	<b>6.65</b> (5.93-7.21)	<b>7.70</b> (6.80-8.35)	<b>8.56</b> (7.49-9.30)
<b>2-day</b>	<b>2.50</b> (2.30-2.73)	<b>3.00</b> (2.76-3.28)	<b>3.71</b> (3.40-4.06)	<b>4.30</b> (3.94-4.70)	<b>5.15</b> (4.69-5.62)	<b>5.86</b> (5.31-6.38)	<b>6.62</b> (5.95-7.19)	<b>7.42</b> (6.63-8.07)	<b>8.59</b> (7.58-9.33)	<b>9.54</b> (8.34-10.4)
<b>3-day</b>	<b>2.65</b> (2.44-2.89)	<b>3.17</b> (2.93-3.46)	<b>3.91</b> (3.60-4.26)	<b>4.52</b> (4.16-4.92)	<b>5.40</b> (4.95-5.87)	<b>6.13</b> (5.58-6.65)	<b>6.91</b> (6.25-7.49)	<b>7.73</b> (6.95-8.38)	<b>8.90</b> (7.91-9.66)	<b>9.86</b> (8.68-10.7)
<b>4-day</b>	<b>2.80</b> (2.59-3.04)	<b>3.34</b> (3.10-3.63)	<b>4.11</b> (3.80-4.46)	<b>4.74</b> (4.38-5.14)	<b>5.65</b> (5.20-6.12)	<b>6.40</b> (5.86-6.92)	<b>7.19</b> (6.54-7.78)	<b>8.04</b> (7.26-8.70)	<b>9.22</b> (8.24-9.99)	<b>10.2</b> (9.02-11.1)
<b>7-day</b>	<b>3.30</b> (3.07-3.55)	<b>3.94</b> (3.67-4.24)	<b>4.78</b> (4.45-5.15)	<b>5.46</b> (5.08-5.87)	<b>6.39</b> (5.92-6.87)	<b>7.14</b> (6.59-7.67)	<b>7.91</b> (7.27-8.49)	<b>8.70</b> (7.95-9.36)	<b>9.79</b> (8.87-10.5)	<b>10.6</b> (9.57-11.5)
<b>10-day</b>	<b>3.89</b> (3.64-4.17)	<b>4.62</b> (4.32-4.96)	<b>5.53</b> (5.17-5.93)	<b>6.26</b> (5.85-6.71)	<b>7.26</b> (6.76-7.78)	<b>8.06</b> (7.48-8.63)	<b>8.86</b> (8.19-9.50)	<b>9.69</b> (8.91-10.4)	<b>10.8</b> (9.88-11.6)	<b>11.7</b> (10.6-12.6)
<b>20-day</b>	<b>5.33</b> (5.04-5.64)	<b>6.28</b> (5.94-6.64)	<b>7.33</b> (6.93-7.76)	<b>8.14</b> (7.68-8.60)	<b>9.19</b> (8.66-9.71)	<b>9.99</b> (9.39-10.6)	<b>10.8</b> (10.1-11.4)	<b>11.5</b> (10.8-12.2)	<b>12.5</b> (11.6-13.2)	<b>13.2</b> (12.2-14.0)
<b>30-day</b>	<b>6.65</b> (6.30-7.01)	<b>7.79</b> (7.38-8.21)	<b>8.94</b> (8.47-9.42)	<b>9.82</b> (9.31-10.3)	<b>11.0</b> (10.4-11.5)	<b>11.8</b> (11.1-12.4)	<b>12.6</b> (11.9-13.3)	<b>13.4</b> (12.6-14.1)	<b>14.3</b> (13.4-15.1)	<b>15.0</b> (14.0-15.8)
<b>45-day</b>	<b>8.42</b> (8.00-8.86)	<b>9.84</b> (9.36-10.4)	<b>11.2</b> (10.6-11.7)	<b>12.1</b> (11.5-12.7)	<b>13.3</b> (12.6-14.0)	<b>14.2</b> (13.4-14.9)	<b>14.9</b> (14.2-15.7)	<b>15.7</b> (14.8-16.5)	<b>16.5</b> (15.6-17.4)	<b>17.0</b> (16.1-18.0)
<b>60-day</b>	<b>10.1</b> (9.68-10.6)	<b>11.8</b> (11.3-12.3)	<b>13.2</b> (12.7-13.8)	<b>14.3</b> (13.6-14.9)	<b>15.5</b> (14.8-16.2)	<b>16.4</b> (15.7-17.1)	<b>17.2</b> (16.4-18.0)	<b>17.8</b> (17.0-18.7)	<b>18.6</b> (17.8-19.5)	<b>19.1</b> (18.2-20.1)

<sup>1</sup> Precipitation frequency (PF) estimates in this table are based on frequency analysis of partial duration series (PDS).


Numbers in parenthesis are PF estimates at lower and upper bounds of the 90% confidence interval. The probability that precipitation frequency estimates (for a given duration and average recurrence interval) will be greater than the upper bound (or less than the lower bound) is 5%. Estimates at upper bounds are not checked against probable maximum precipitation (PMP) estimates and may be higher than currently valid PMP values.

Please refer to NOAA Atlas 14 document for more information.


[Back to Top](#)

**PF graphical**


PDS-based depth-duration-frequency (DDF) curves  
Latitude: 40.4117°, Longitude: -78.3992°

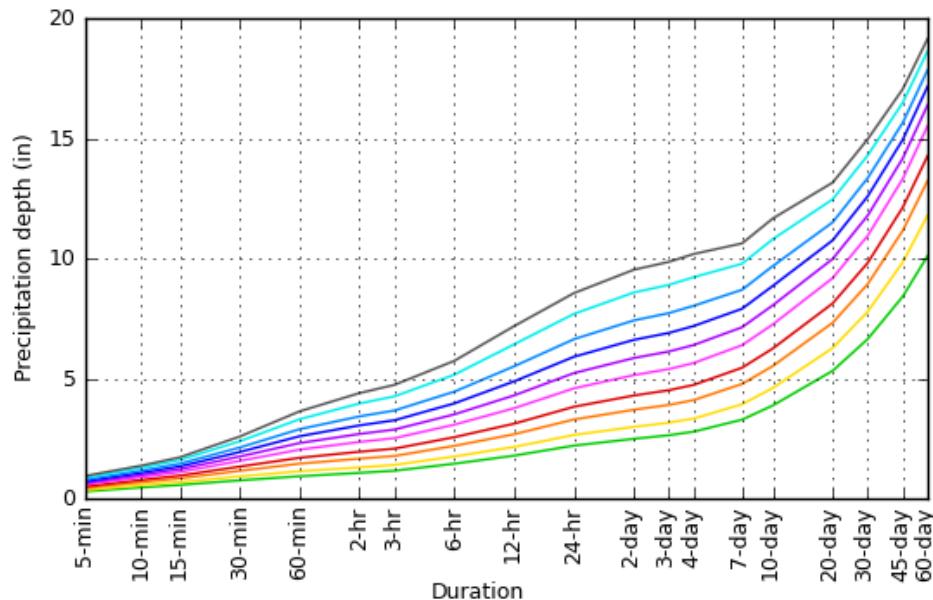


Average recurrence interval (years)
1
2
5
10
25
50
100
200
500
1000

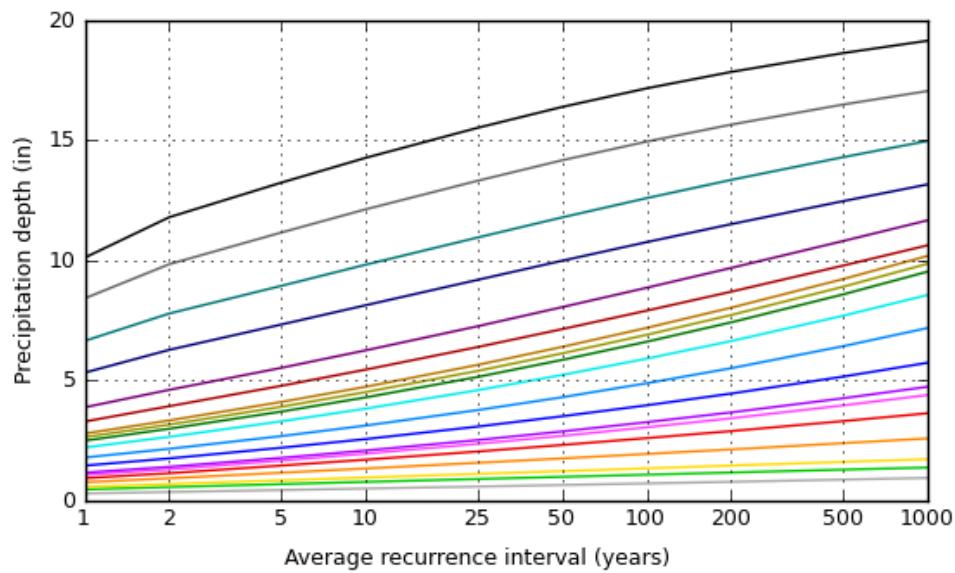


Duration	
5-min	2-day
10-min	3-day
15-min	4-day
30-min	7-day
60-min	10-day
2-hr	10-day
3-hr	20-day
6-hr	30-day
12-hr	45-day
24-hr	60-day

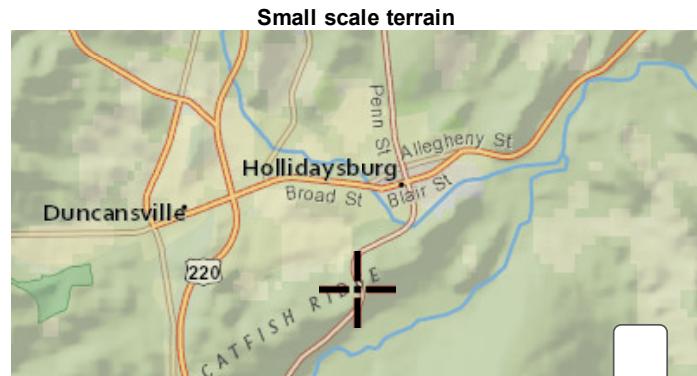
[Back to Top](#)**Maps & aerials**

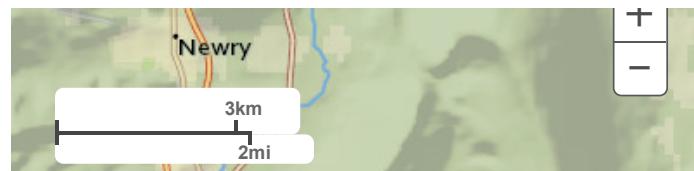


Large scale terrain

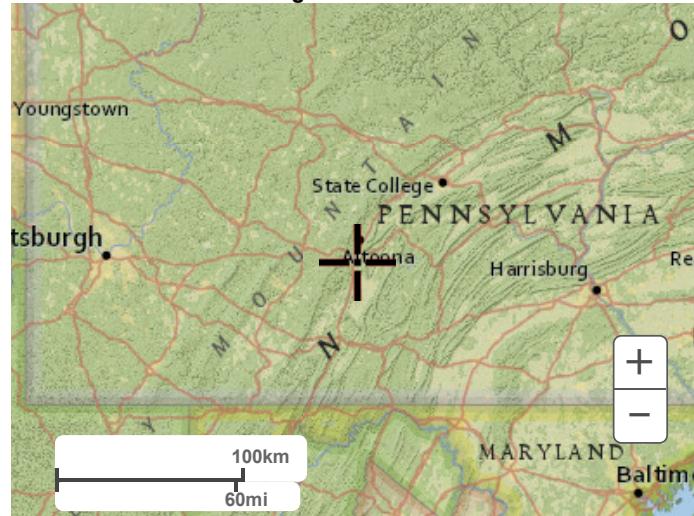

Large scale map

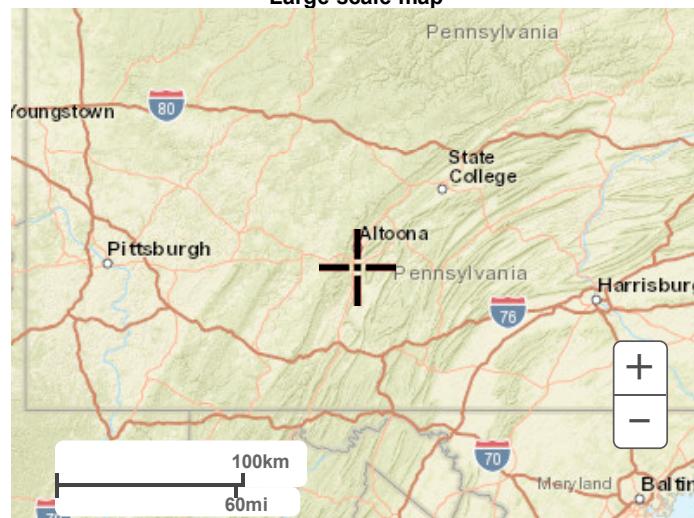

Large scale aerial

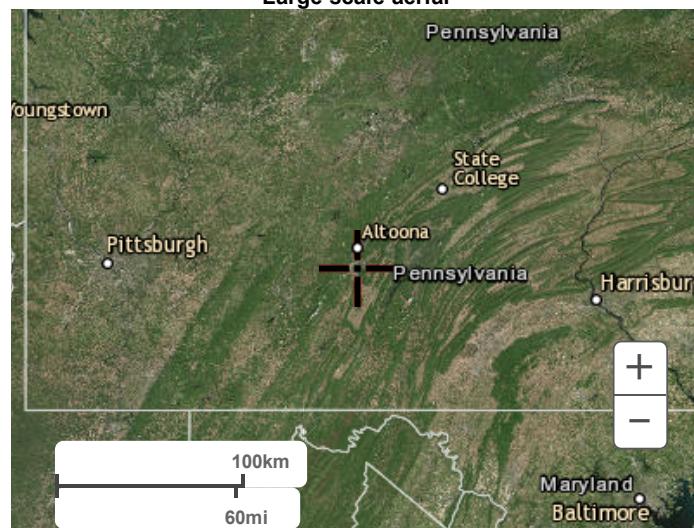[Back to Top](#)

## WORKSHEET 1. GENERAL SITE INFORMATION

Date: November 11, 2016

Project Name: Charger

Municipality: Blair

County: Blair

Total Area (acres): DA1 - 1.36; DA2 - 0.15

Major River Basin: Susquehanna River

Watershed: Frankstown Branch Juniata River

Sub Basin: Little Juniata River

Nearest Surface Water to Receive Runoff: Tributary #16332 to Beaverdam Branch

Chapter 93 - Designated Water Use: Warm Water Fishes (WWF)

Impaired according to Chapter 303(d) list?

YES

NO

List Causes of Impairment:

Metals; pH; Organic Enrichment/Low D.O.

*Is Project Subject to, or Part of:*

Municipal Separate Storm Sewer System (MS4) Requirements

YES

NO

Existing or Planned drinking water supply?

YES

NO

If yes, distance from proposed discharge (miles): \_\_\_\_\_

Approved Act 167 Plan?

YES

NO

Existing River Conservation Plan?

YES

NO

## Worksheet 2. Sensitive Natural Resources

### INSTRUCTIONS

1. Provide Sensitive Resources Map according to non-structural BMP 5.4.1 in Chapter 5. This map should identify wetlands, woodlands, natural drainage ways, steep slopes, and other sensitive natural areas.

See pre-development drainage area map

2. Summarize the existing extent of each sensitive resource in the Existing Sensitive Resources Table (below, using Acres). If none present, insert 0.

Woodlands – 0.62 acres

3. Summarize Total Protected Area as defined under BMPs in Chapter 5.

0.00 acres

4. Do not count any area twice. For example, an area that is both a floodplain and a wetland may only be considered once.

EXISTING NATURAL SENSITIVE RESOURCE	MAPPED? Yes/no/n/a	TOTAL AREA (Ac.)	PROTECTED AREA (Ac.)
Waterbodies	N/A		
Floodplains	N/A		
Riparian Areas	N/A		
Wetlands	N/A		
Woodlands	Yes	0.62	0
Natural Drainage Ways	N/A		
Steep Slopes, 15% - 25%	N/A		
Steep Slopes, over 25%	N/A		
Other:			
Other:			
<b>TOTAL EXISTING:</b>		<b>0.62</b>	<b>0.00</b>

## Worksheet 3. Nonstructural BMP Credits

### PROTECTED AREA

**1.1 Area of Protected Sensitive/Special Value Features (see WS 2)** 0.00 Ac.

**1.2 Area of Riparian Forest Buffer Protection** 0.00 Ac.

**3.1 Area of Minimum Disturbance/Reduced Grading** 0.00 Ac

**TOTAL** 0.00 Ac

Site Area	Minus	Protected Area	=	Stormwater Management Area
0.67	-	0	=	0.67
This is the area that requires stormwater management <div style="margin-left: 100px;"> </div>				

### VOLUME CREDITS

**3.1 Minimum Soil Compaction** (See Chapter 8, page 22 – SW BMP Manual)

Lawn \_\_\_\_\_ ft<sup>2</sup> x 1/4" x 1/12 = \_\_\_\_\_ ft<sup>3</sup>

Meadow \_\_\_\_\_ ft<sup>2</sup> x 1/3" x 1/12 = \_\_\_\_\_ ft<sup>3</sup>

**3.3 Protect Existing Trees** (See Chapter 8, page 23 – SW BMP Manual)

*For Trees within 100 feet of impervious area:*

Tree Canopy \_\_\_\_\_ ft<sup>2</sup> x 1/2" x 1/12 = \_\_\_\_\_ ft<sup>3</sup>

**5.1 Disconnect Roof Leaders to Vegetated Areas** (See Chapter 8 page 25 – SW BMP Manual)

*For runoff directed to areas protected under 5.8.1 and 5.8.2*

Roof Area \_\_\_\_\_ ft<sup>2</sup> x 1/3" x 1/12 = \_\_\_\_\_ ft<sup>3</sup>

*For all other disconnected roof areas*

Roof Area \_\_\_\_\_ ft<sup>2</sup> x 1/4" x 1/12 = \_\_\_\_\_ ft<sup>3</sup>

**5.2 Disconnect Non-Roof impervious to Vegetated Areas** (See Chapter 8, page 26 – SW BMP Manual)

*For Runoff directed to areas protected under 5.8.1 and 5.8.2*

Impervious Area \_\_\_\_\_ ft<sup>2</sup> x 1/3" x 1/12 = \_\_\_\_\_ ft<sup>3</sup>

*For all other disconnected roof areas*

Impervious Area \_\_\_\_\_ ft<sup>2</sup> x 1/4" x 1/12 = \_\_\_\_\_ ft<sup>3</sup>

**TOTAL NON-STRUCTURAL VOLUME CREDIT\*** \_\_\_\_\_ ft<sup>3</sup>

\*For use on Worksheet 5

## WORKSHEET 4. CHANGE IN RUNOFF VOLUME FOR 2-YR STORM EVENT

PROJECT: Charger  
 Drainage Area: 1.36 acres DA1  
 2-Year Rainfall: 2.66 in

Total Site Area: 0.67 acres  
 Protected Site Area: N/A acres  
 Managed Site Area: 0.67 acres

### Existing Conditions

Cover Type/Condition	Soil Type	Area (sf)	Area (ac)	CN	S	Ia (0.2*S)	Q Runoff <sup>1</sup> (in)	Runoff Volume <sup>3</sup> (ft <sup>3</sup> )
Meadow	B	436	0.01	58	7.24	1.45	0.17	6
Meadow	C	0	0.00	71	4.08	0.82	0.57	0
Meadow	D	1,742	0.04	78	2.82	0.56	0.89	130
Woods	B	436	0.01	55	8.18	1.64	0.11	4
Woods	C	14,810	0.34	70	4.29	0.86	0.53	659
Woods	D	11,761	0.27	77	2.99	0.60	0.84	826
<b>TOTAL:</b>		<b>29,185</b>	<b>0.67</b>					<b>1,625</b>

### Developed Conditions

Cover Type/Condition	Soil Type	Area (sf)	Area (ac)	CN	S	Ia (0.2*S)	Q Runoff <sup>1</sup> (in)	Runoff Volume <sup>3</sup> (ft <sup>3</sup> )
Impervious-Gravel	B	0	0.00	85	1.76	0.35	1.31	0
Impervious-Gravel	C	4,356	0.10	89	1.24	0.25	1.60	579
Impervious-Gravel	D	1,742	0.04	91	0.99	0.20	1.76	255
Meadow	B	436	0.01	58	7.24	1.45	0.17	6
Meadow	C	10,890	0.25	71	4.08	0.82	0.57	520
Meadow	D	11,761	0.27	78	2.82	0.56	0.89	876
<b>TOTAL:</b>		<b>29,185</b>	<b>0.67</b>					<b>2,236</b>

2-Year Volume Increase (ft <sup>3</sup> ):	612
--	-----

**2-Year Volume Increase = Developed Conditions Runoff Volume - Existing Conditions Runoff Volume**

1. Runoff (in) = Q =  $(P - 0.2S)2 / (P + 0.8S)$  where

$$P = \text{2-Year Rainfall (in)}$$

$$S = (1000/CN)-10$$

2. Runoff Volume (CF) = Q x Area x 1/12

$$Q = \text{Runoff (in)}$$

$$\text{Area} = \text{Land use area (sq. ft.)}$$

**Note: Runoff Volume must be calculated for EACH land use type/condition and HSGI.**

**The use of a weighted CN value for volume calculations is not acceptable.**

Worksheet 5. Structural BMP Volume Credits

**PROJECT:** Charger  
**SUB-BASIN:** DA1

<b>Required Control Volume (ft<sup>3</sup>) - from Worksheet 4:</b>	612
<b>Non-structural Volume Credit (ft<sup>3</sup>) - from Worksheet 3:</b> (maximum is 25% of required volume)	N/A
<b>Structural Volume Reqmt (ft<sup>3</sup>):</b> <i>(Required Control Volume minus Non-structural Credit)</i>	612

Proposed BMPs from PA Stormwater Best Management Practices Manual Chapter 6	Area (ft <sup>2</sup> )	Volume Reduction Permanently Removed (ft <sup>3</sup> )
6.4.1 Porous Pavement		
6.4.2 Infiltration Basin		
6.4.3 Infiltration Bed		
6.4.4 Infiltration Trench		
6.4.5 Rain Garden/Bioretention		
6.4.6 Dry Well/Seepage Pit		
6.4.7 Constructed Filter		
6.4.8 Vegetated Swale		
6.4.9 Vegetated Filter Strip		
6.4.10 Berm		
6.5.1 Vegetated Roof		
6.5.2 Capture and Re-Use		
6.6.1 Constructed Wetlands		
6.6.2 Wet Pond/Retention Basin		
6.7.1 Riparian Buffer/Riparian Forest Buffer Restoration		
6.7.2 Landscape Restoration/Reforestation		
6.7.3 Soil Amendment		
6.8.1 Level Spreader		
6.8.2 Special Storage Areas		
Other: Slow Release Concept	168	840
<b>Total Structural Volume (ft<sup>3</sup>):</b>	<b>840</b>	
<b>Structural Volume Requirement (ft<sup>3</sup>):</b>	<b>612</b>	
<b>DIFFERENCE:</b>	<b>-228</b>	

**VOLUME CREDIT DETERMINATION DA 1**

- |   |   |      |    |
|---|---|------|----|
| 1 Detained area runoff volume from Hydraflow  | = | 1124 | cf |
| 2 Storage volume of the BMP   | = | 840  | cf |
| 3 Infiltrated volume within 72 hours after the 2-yr/24-hr event<br>Dewatering rate x 3600 sec/hr x 72 hrs | = | 1555 | cf |

Based on flow through slow release BMP

## **WORKSHEET 10. WATER QUALITY COMPLIANCE FOR NITRATE**

**Does the site design incorporate the following BMPs to address nitrate pollution? A summary "yes" rating is achieved if at least 2 Primary BMPs for nitrate are provided across the site or 4 secondary BMPs for nitrate are provided across the site (or the**

**PRIMARY BMPs FOR NITRATE:**

	YES	NO
NS BMP 5.4.2 - Protect / Conserve / Enhance Riparian Buffers	<input type="checkbox"/>	<input type="checkbox"/>
NS BMP 5.5.4 - Cluster Uses at Each Site	<input type="checkbox"/>	<input type="checkbox"/>
NS BMP 5.6.1 - Minimize Total Disturbed Area	<input checked="" type="checkbox"/>	<input type="checkbox"/>
NS BMP 5.6.3 - Re-Vegetate / Re-Forest Disturbed Areas (Native Species)	<input checked="" type="checkbox"/>	<input type="checkbox"/>
NS BMP 5.9.1 - Street Sweeping / Vacuuming	<input type="checkbox"/>	<input type="checkbox"/>
Structural BMP 6.7.1 - Riparian Buffer Restoration	<input type="checkbox"/>	<input type="checkbox"/>
Structural BMP 6.7.2 - Landscape Restoration	<input type="checkbox"/>	<input type="checkbox"/>

**SECONDARY BMPs FOR NITRATE:**

NS BMP 5.4.1 - Protect Sensitive / Special Value Features	<input type="checkbox"/>	<input type="checkbox"/>
NS BMP 5.4.3 - Protect / Utilize Natural Drainage Features	<input type="checkbox"/>	<input type="checkbox"/>
NS BMP 5.6.2 - Minimize Soil Compaction	<input checked="" type="checkbox"/>	<input type="checkbox"/>
Structural BMP 6.4.5 - Rain Garden / Bioretention	<input type="checkbox"/>	<input type="checkbox"/>
Structural BMP 6.4.8 - Vegetated Swale	<input type="checkbox"/>	<input type="checkbox"/>
Structural BMP 6.4.9 - Vegetated Filter Strip	<input type="checkbox"/>	<input type="checkbox"/>
Structural BMP 6.6.1 - Constructed Wetland	<input type="checkbox"/>	<input type="checkbox"/>
Structural BMP 6.7.1 - Riparian Buffer Restoration	<input type="checkbox"/>	<input type="checkbox"/>
Structural BMP 6.7.2 - Landscape Restoration	<input type="checkbox"/>	<input type="checkbox"/>
Structural BMP 6.7.3 - Soils Amendment/Restoration	<input checked="" type="checkbox"/>	<input type="checkbox"/>

## Worksheet 2. Sensitive Natural Resources

### INSTRUCTIONS

1. Provide Sensitive Resources Map according to non-structural BMP 5.4.1 in Chapter 5. This map should identify wetlands, woodlands, natural drainage ways, steep slopes, and other sensitive natural areas.

See pre-development drainage area map

2. Summarize the existing extent of each sensitive resource in the Existing Sensitive Resources Table (below, using Acres). If none present, insert 0.

Woodlands - 0.05 acres

3. Summarize Total Protected Area as defined under BMPs in Chapter 5.

0.00 acres

4. Do not count any area twice. For example, an area that is both a floodplain and a wetland may only be considered once.

EXISTING NATURAL SENSITIVE RESOURCE	MAPPED? Yes/no/n/a	TOTAL AREA (Ac.)	PROTECTED AREA (Ac.)
Waterbodies	N/A		
Floodplains	N/A		
Riparian Areas	N/A		
Wetlands	N/A		
Woodlands	Yes	0.05	
Natural Drainage Ways	N/A		
Steep Slopes, 15% - 25%	N/A		
Steep Slopes, over 25%	N/A		
Other:			
Other:			
<b>TOTAL EXISTING:</b>		<b>0.05</b>	<b>0.00</b>

## Worksheet 3. Nonstructural BMP Credits

### PROTECTED AREA

**1.1 Area of Protected Sensitive/Special Value Features (see WS 2)** 0.00 Ac.

**1.2 Area of Riparian Forest Buffer Protection** 0.00 Ac.

**3.1 Area of Minimum Disturbance/Reduced Grading** 0.00 Ac

**TOTAL** 0.00 Ac

Site Area	Minus	Protected Area	=	Stormwater Management Area
0.10	-	0	=	0.10
This is the area that requires stormwater management <div style="margin-left: 100px;"> </div>				

### VOLUME CREDITS

**3.1 Minimum Soil Compaction** (See Chapter 8, page 22 – SW BMP Manual)

Lawn \_\_\_\_\_ ft<sup>2</sup> x 1/4" x 1/12 = \_\_\_\_\_ ft<sup>3</sup>

Meadow \_\_\_\_\_ ft<sup>2</sup> x 1/3" x 1/12 = \_\_\_\_\_ ft<sup>3</sup>

**3.3 Protect Existing Trees** (See Chapter 8, page 23 – SW BMP Manual)

*For Trees within 100 feet of impervious area:*

Tree Canopy \_\_\_\_\_ ft<sup>2</sup> x 1/2" x 1/12 = \_\_\_\_\_ ft<sup>3</sup>

**5.1 Disconnect Roof Leaders to Vegetated Areas** (See Chapter 8 page 25 – SW BMP Manual)

*For runoff directed to areas protected under 5.8.1 and 5.8.2*

Roof Area \_\_\_\_\_ ft<sup>2</sup> x 1/3" x 1/12 = \_\_\_\_\_ ft<sup>3</sup>

*For all other disconnected roof areas*

Roof Area \_\_\_\_\_ ft<sup>2</sup> x 1/4" x 1/12 = \_\_\_\_\_ ft<sup>3</sup>

**5.2 Disconnect Non-Roof impervious to Vegetated Areas** (See Chapter 8, page 26 – SW BMP Manual)

*For Runoff directed to areas protected under 5.8.1 and 5.8.2*

Impervious Area \_\_\_\_\_ ft<sup>2</sup> x 1/3" x 1/12 = \_\_\_\_\_ ft<sup>3</sup>

*For all other disconnected roof areas*

Impervious Area \_\_\_\_\_ ft<sup>2</sup> x 1/4" x 1/12 = \_\_\_\_\_ ft<sup>3</sup>

**TOTAL NON-STRUCTURAL VOLUME CREDIT\*** \_\_\_\_\_ ft<sup>3</sup>

\*For use on Worksheet 5

## WORKSHEET 4. CHANGE IN RUNOFF VOLUME FOR 2-YR STORM EVENT

PROJECT: Charger  
 Drainage Area: 0.15 acres DA2  
 2-Year Rainfall: 2.66 in

Total Site Area: 0.10 acres  
 Protected Site Area: N/A acres  
 Managed Site Area: 0.10 acres

### Existing Conditions

Cover Type/Condition	Soil Type	Area (sf)	Area (ac)	CN	S	Ia (0.2*S)	Q Runoff <sup>1</sup> (in)	Runoff Volume <sup>3</sup> (ft <sup>3</sup> )
Meadow	B	0	0.00	58	7.24	1.45	0.17	0
Meadow	C	2,178	0.05	71	4.08	0.82	0.57	104
Meadow	D	0	0.00	78	2.82	0.56	0.89	0
Woods	B	0	0.00	55	8.18	1.64	0.11	0
Woods	C	2,178	0.05	70	4.29	0.86	0.53	97
Woods	D	0	0.00	77	2.99	0.60	0.84	0
<b>TOTAL:</b>		<b>4,356</b>	<b>0.10</b>					<b>201</b>

### Developed Conditions

Cover Type/Condition	Soil Type	Area (sf)	Area (ac)	CN	S	Ia (0.2*S)	Q Runoff <sup>1</sup> (in)	Runoff Volume <sup>3</sup> (ft <sup>3</sup> )
Impervious-Gravel	B	0	0.00	85	1.76	0.35	1.31	0
Impervious-Gravel	C	871	0.02	89	1.24	0.25	1.60	116
Impervious-Gravel	D	0	0.00	91	0.99	0.20	1.76	0
Meadow	B	0	0.00	58	7.24	1.45	0.17	0
Meadow	C	3,485	0.08	71	4.08	0.82	0.57	166
Meadow	D	0	0.00	78	2.82	0.56	0.89	0
<b>TOTAL:</b>		<b>4,356</b>	<b>0.10</b>					<b>282</b>

2-Year Volume Increase (ft <sup>3</sup> ):	81
--	----

### 2-Year Volume Increase = Developed Conditions Runoff Volume - Existing Conditions Runoff Volume

1. Runoff (in) =  $Q = (P - 0.2S)2 / (P + 0.8S)$  where

$$P = \text{2-Year Rainfall (in)}$$

$$S = (1000/CN)-10$$

2. Runoff Volume (CF) =  $Q \times \text{Area} \times 1/12$

$$Q = \text{Runoff (in)}$$

$$\text{Area} = \text{Land use area (sq. ft.)}$$

**Note:** Runoff Volume must be calculated for EACH land use type/condition and HSGI.

The use of a weighted CN value for volume calculations is not acceptable.

Worksheet 5. Structural BMP Volume Credits

**PROJECT:** Charger  
**SUB-BASIN:** DA2

<b>Required Control Volume (ft<sup>3</sup>) - from Worksheet 4:</b>	<u>81</u>
<b>Non-structural Volume Credit (ft<sup>3</sup>) - from Worksheet 3:</b> (maximum is 25% of required volume)	<u>N/A</u>
<b>Structural Volume Reqmt (ft<sup>3</sup>):</b> <i>(Required Control Volume minus Non-structural Credit)</i>	<u>81</u>

Proposed BMPs from PA Stormwater Best Management Practices Manual Chapter 6	Area (ft <sup>2</sup> )	Volume Reduction Permanently Removed (ft <sup>3</sup> )
6.4.1 Porous Pavement		
6.4.2 Infiltration Basin		
6.4.3 Infiltration Bed		
6.4.4 Infiltration Trench		
6.4.5 Rain Garden/Bioretention		
6.4.6 Dry Well/Seepage Pit		
6.4.7 Constructed Filter		
6.4.8 Vegetated Swale		
6.4.9 Vegetated Filter Strip		
6.4.10 Berm		
6.5.1 Vegetated Roof		
6.5.2 Capture and Re-Use		
6.6.1 Constructed Wetlands		
6.6.2 Wet Pond/Retention Basin		
6.7.1 Riparian Buffer/Riparian Forest Buffer Restoration		
6.7.2 Landscape Restoration/Reforestation		
6.7.3 Soil Amendment		
6.8.1 Level Spreader		
6.8.2 Special Storage Areas		
Other: Slow Release Concept	48	130
<b>Total Structural Volume (ft<sup>3</sup>):</b>	<b>130</b>	
<b>Structural Volume Requirement (ft<sup>3</sup>):</b>	<b>81</b>	
<b>DIFFERENCE:</b>	<b>-49</b>	

**VOLUME CREDIT DETERMINATION DA 1**

- |   |                 |
|---|-----------------|
| 1 Detained area runoff volume from Hydraflow  | = <u>135</u> cf |
| 2 Storage volume of the BMP   | = <u>130</u> cf |
| 3 Infiltrated volume within 72 hours after the 2-yr/24-hr event<br>Dewatering rate x 3600 sec/hr x 72 hrs | = <u>259</u> cf |

Based on flow through slow release BMP

**WORKSHEET 10. WATER QUALITY COMPLIANCE FOR NITRATE**

*Does the site design incorporate the following BMPs to address nitrate pollution? A summary "yes" rating is achieved if at least 2 Primary BMPs for nitrate are provided across the site or 4 secondary BMPs for nitrate are provided across the site (or the*

**PRIMARY BMPs FOR NITRATE:**

	YES	NO
NS BMP 5.4.2 - Protect / Conserve / Enhance Riparian Buffers	<input type="checkbox"/>	<input type="checkbox"/>
NS BMP 5.5.4 - Cluster Uses at Each Site	<input type="checkbox"/>	<input type="checkbox"/>
NS BMP 5.6.1 - Minimize Total Disturbed Area	<input checked="" type="checkbox"/>	<input type="checkbox"/>
NS BMP 5.6.3 - Re-Vegetate / Re-Forest Disturbed Areas (Native Species)	<input checked="" type="checkbox"/>	<input type="checkbox"/>
NS BMP 5.9.1 - Street Sweeping / Vacuuming	<input type="checkbox"/>	<input type="checkbox"/>
Structural BMP 6.7.1 - Riparian Buffer Restoration	<input type="checkbox"/>	<input type="checkbox"/>
Structural BMP 6.7.2 - Landscape Restoration	<input type="checkbox"/>	<input type="checkbox"/>

**SECONDARY BMPs FOR NITRATE:**

NS BMP 5.4.1 - Protect Sensitive / Special Value Features	<input type="checkbox"/>	<input type="checkbox"/>
NS BMP 5.4.3 - Protect / Utilize Natural Drainage Features	<input type="checkbox"/>	<input type="checkbox"/>
NS BMP 5.6.2 - Minimize Soil Compaction	<input checked="" type="checkbox"/>	<input type="checkbox"/>
Structural BMP 6.4.5 - Rain Garden / Bioretention	<input type="checkbox"/>	<input type="checkbox"/>
Structural BMP 6.4.8 - Vegetated Swale	<input type="checkbox"/>	<input type="checkbox"/>
Structural BMP 6.4.9 - Vegetated Filter Strip	<input type="checkbox"/>	<input type="checkbox"/>
Structural BMP 6.6.1 - Constructed Wetland	<input type="checkbox"/>	<input type="checkbox"/>
Structural BMP 6.7.1 - Riparian Buffer Restoration	<input type="checkbox"/>	<input type="checkbox"/>
Structural BMP 6.7.2 - Landscape Restoration	<input type="checkbox"/>	<input type="checkbox"/>
Structural BMP 6.7.3 - Soils Amendment/Restoration	<input checked="" type="checkbox"/>	<input type="checkbox"/>

**TIME OF CONCENTRATION ADJUSTMENT DETAINED 1**

POST CONSTRUCTION TC TO BMP (DETAINED TC) BEFORE ADJUSTMENT

7.2 MIN

STRUCTURAL VOLUME PROVIDED BY BMP

840 CF

RATES OF RUNOFF TO THE BMP (FROM HYDRAFLOW REPORT)

Storm Event	Q (CFS)
2 YR/24 HR	0.523
10 YR/24 HR	0.996
50 YR/24 HR	1.617
100 YR/24 HR	1.918

ADDITIONAL RESIDENCE TIME (MIN) = (STRUCTURAL VOLUME PROVIDED BY BMP / RATE OF RUNOFF TO BMP) / 60

Storm Event	Q (CFS)	Additional Residence Time (min.)
2 YR/24 HR	0.523	26.769
10 YR/24 HR	0.996	14.056
50 YR/24 HR	1.617	8.658
100 YR/24 HR	1.918	7.299

ADJUSTED TC = POST CONSTRUCTION TC TO BMP BEFORE ADJUSTMENT + ADDITIONAL RESIDENCE TIME

Storm Event	Q (CFS)	Additional Residence Time (min.)	Adjusted Time of Concentration (min.)
2 YR/24 HR	0.523	26.769	33.969
10 YR/24 HR	0.996	14.056	21.256
50 YR/24 HR	1.617	8.658	15.858
100 YR/24 HR	1.918	7.299	14.499

## Underdrain Dewatering Rate Calculation

Project: Charger DA1

BMP: \_\_\_\_\_ 1

Filter Media				
Layer	Media	Thickness - T (ft)	Min. Infiltration Rate - K (ft/min) <sup>1</sup>	Flow Rate (cfs) <sup>2</sup>
1	Clean Gravel	N/A	2	N/A
2	Coarse Sand	2	0.02	0.03
3	Fine Sand	N/A	0.002	N/A
4	Other <sup>3</sup>	N/A	N/A	N/A
Minimum Flow Rate (cfs)				0.028

1. From Principles of Geotechnical Engineering Third Edition, Braja Das, 1994

2.  $Q = KA(H_m + T/T)$

A = Area (square feet) = 168

$H_m$  = Head above media (feet) = 1

3. Infiltration rate measured in field or laboratory

Perforated Pipe				
Pipe	Perforation Area (square inch) <sup>4</sup>	# Perforations per Foot N	Pipe Length - L (ft)	Flow Rate (cfs) <sup>5</sup>
1	1.00	1	56	2.33
2	N/A	N/A	N/A	N/A
Total Flow Rate (cfs)				2.33

4. Reference: [PVC: certainteed.com](http://certainteed.com) [HDPE: ads-pipe.com](http://ads-pipe.com)

5.  $Q = N * L * c A o v (2G)$

c = Orifice Coefficient = 0.6

$A_o$  = Perforation Area (sq. ft.) 0.007

G = Grav. Accel. (ft/sec<sup>2</sup>) 32.2

H = Average Head (ft) = 2.5

Pipe Discharge				
Pipe	Pipe Diameter - D (in)	Pipe Roughness Coefficient - n	Pipe Slope - S <sup>6</sup>	Flow Rate (cfs) <sup>7</sup>
1	4	0.012	0.005952381	0.16
2	N/A	N/A	N/A	N/A
Total Flow Rate (cfs)				0.16

6. For flat pipe, use hydraulic grade (pipe diameter/pipe length) for the pipe slope

7. From Manning's equation (attach separate calculation worksheet)

Limiting flow rate from combined underdrain system - Q <sub>l</sub> (cfs) =	0.028
Detained volume based on 2-year/24-hour storm (cu-ft) =	840
Total Dewatering Volume including volume in voids(cu-ft) =	974
Dewatering Time (sec) = 2HA/Q <sub>l</sub> =	34,800
Dewatering Time (hrs) =	9.67

## TIME OF CONCENTRATION ADJUSTMENT DETAINED 2

POST CONSTRUCTION TC TO BMP (DETAINED TC) BEFORE ADJUSTMENT

7.1 MIN

STRUCTURAL VOLUME PROVIDED BY BMP

130 CF

RATES OF RUNOFF TO THE BMP (FROM HYDRAFLOW REPORT)

Storm Event	Q (CFS)
2 YR/24 HR	0.058
10 YR/24 HR	0.122
50 YR/24 HR	0.21
100 YR/24 HR	0.254

ADDITIONAL RESIDENCE TIME (MIN) = (STRUCTURAL VOLUME PROVIDED BY BMP / RATE OF RUNOFF TO BMP) / 60

Storm Event	Q (CFS)	Additional Residence Time (min.)
2 YR/24 HR	0.058	37.356
10 YR/24 HR	0.122	17.760
50 YR/24 HR	0.210	10.317
100 YR/24 HR	0.254	8.530

ADJUSTED TC = POST CONSTRUCTION TC TO BMP BEFORE ADJUSTMENT + ADDITIONAL RESIDENCE TIME

Storm Event	Q (CFS)	Additional Residence Time (min.)	Adjusted Time of Concentration (min.)
2 YR/24 HR	0.058	37.356	44.456
10 YR/24 HR	0.122	17.760	24.860
50 YR/24 HR	0.210	10.317	17.417
100 YR/24 HR	0.254	8.530	15.630

## Underdrain Dewatering Rate Calculation

Project: Charger DA2

BMP: \_\_\_\_\_ 2

Filter Media				
Layer	Media	Thickness - T (ft)	Min. Infiltration Rate - K (ft/min) <sup>1</sup>	Flow Rate (cfs) <sup>2</sup>
1	Clean Gravel	N/A	2	N/A
2	Coarse Sand	N/A	0.02	N/A
3	Fine Sand	2	0.002	0.00080
4	Other <sup>3</sup>	N/A	N/A	N/A
Minimum Flow Rate (cfs)				0.001

1. From Principles of Geotechnical Engineering Third Edition, Braja Das, 1994

2.  $Q = KA(H_m + T/T)$

A = Area (square feet) = 48

$H_m$  = Head above media (feet) = 1

3. Infiltration rate measured in field or laboratory

Perforated Pipe				
Pipe	Perforation Area (square inch) <sup>4</sup>	# Perforations per Foot N	Pipe Length - L (ft)	Flow Rate (cfs) <sup>5</sup>
1	1.00	1	16	0.66
2	N/A	N/A	N/A	N/A
Total Flow Rate (cfs)				0.66

4. Reference: [PVC: certainteed.com](http://certainteed.com) [HDPE: ads-pipe.com](http://ads-pipe.com)

5.  $Q = N * L * c A_o v(2G)$

c = Orifice Coefficient = 0.6

$A_o$  = Perforation Area (sq. ft.) 0.007

G = Grav. Accel. (ft/sec<sup>2</sup>) 32.2

H = Average Head (ft) = 2.5

Pipe Discharge				
Pipe	Pipe Diameter - D (in)	Pipe Roughness Coefficient - n	Pipe Slope - S <sup>6</sup>	Flow Rate (cfs) <sup>7</sup>
1	4	0.012	0.020833333	0.30
2	N/A	N/A	N/A	N/A
Total Flow Rate (cfs)				0.30

6. For flat pipe, use hydraulic grade (pipe diameter/pipe length) for the pipe slope

7. From Manning's equation (attach separate calculation worksheet)

Limiting flow rate from combined underdrain system - Q <sub>l</sub> (cfs) =	0.001
Detained volume based on 2-year/24-hour storm (cu-ft) =	130
Total Dewatering Volume including volume in voids(cu-ft) =	168
Dewatering Time (sec) = 2HA/Q <sub>l</sub> =	210,500
Dewatering Time (hrs) =	58.47

## Underdrain Report

Label	Solve For	Friction Method	Roughness Coefficient
UNDERDRAIN	Full Flow Capacity	Manning Formula	0.012
SLOW RELEASE 1	Full Flow Capacity	Manning Formula	0.012
SLOW RELEASE 2	Full Flow Capacity	Manning Formula	0.012
Channel Slope (ft/ft)	Normal Depth (ft)	Diameter (ft)	Discharge (ft³/s)
0.17500	0.33	0.33	0.86
0.00595	0.33	0.33	0.16
0.02080	0.33	0.33	0.30
Flow Area (ft²)	Wetted Perimeter (ft)	Hydraulic Radius (ft)	Top Width (ft)
0.09	1.05	0.08	0.00
0.09	1.05	0.08	0.00
0.09	1.05	0.08	0.00
Critical Depth (ft)	Percent Full (%)	Critical Slope (ft/ft)	Velocity (ft/s)
0.33	100.0	0.16749	9.88
0.22	100.0	0.00938	1.82
0.30	100.0	0.01838	3.41
Velocity Head (ft)	Specific Energy (ft)	Froude Number	Maximum Discharge (ft³/s)
1.52	1.85	0.00	0.93
0.05	0.38	0.00	0.17

---

## Underdrain Report

---


Velocity Head (ft)	Specific Energy (ft)	Froude Number	Maximum Discharge (ft <sup>3</sup> /s)
0.18	0.51	0.00	0.32

Discharge Full (ft <sup>3</sup> /s)	Slope Full (ft/ft)	Flow Type	Notes
0.86	0.17500	SubCritical	
0.16	0.00595	SubCritical	
0.30	0.02080	SubCritical	

Messages

# Watershed Model Schematic

Hydraflow Hydrographs Extension for AutoCAD® Civil 3D® 2015 by Autodesk, Inc. v10.4

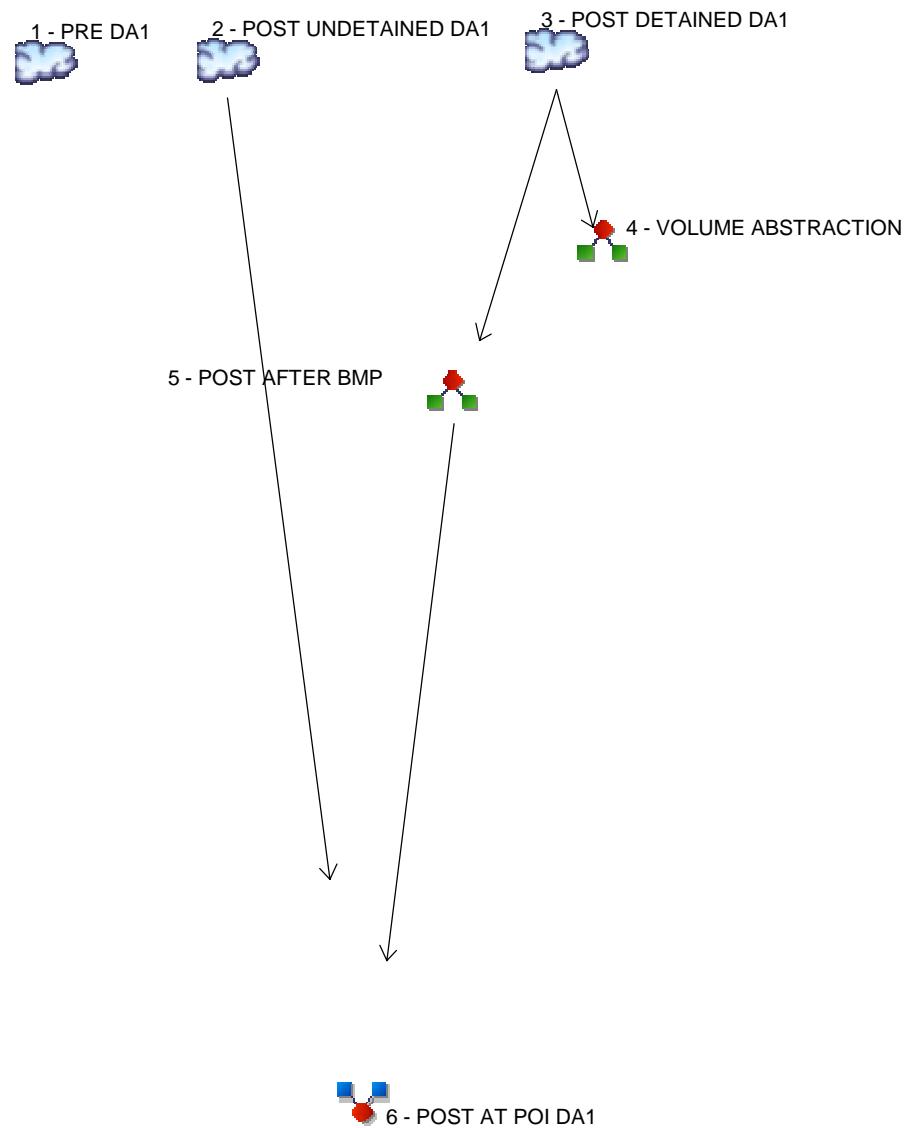

## Legend

### Hyd. Origin      Description

1	SCS Runoff	PRE DA1
2	SCS Runoff	POST UNDETAINED DA1
3	SCS Runoff	POST DETAINED DA1
4	Diversion1	VOLUME ABSTRACTION
5	Diversion2	POST AFTER BMP
6	Combine	POST AT POI DA1

# Hydrograph Return Period Recap

HydraFlow Hydrographs Extension for AutoCAD® Civil 3D® 2015 by Autodesk, Inc. v10.4

Hyd. No.	Hydrograph type (origin)	Inflow hyd(s)	Peak Outflow (cfs)								Hydrograph Description
			1-yr	2-yr	3-yr	5-yr	10-yr	25-yr	50-yr	100-yr	
1	SCS Runoff	-----	-----	1.348	-----	-----	3.025	-----	5.326	6.505	PRE DA1
2	SCS Runoff	-----	-----	1.021	-----	-----	2.291	-----	4.033	4.926	POST UNDETAINED DA1
3	SCS Runoff	-----	-----	0.523	-----	-----	0.996	-----	1.617	1.918	POST DETAINED DA1
4	Diversion1	3	-----	0.523	-----	-----	0.996	-----	1.203	0.917	VOLUME ABSTRACTION
5	Diversion2	3	-----	0.019	-----	-----	0.668	-----	1.617	1.918	POST AFTER BMP
6	Combine	2, 5	-----	1.021	-----	-----	2.291	-----	5.650	6.845	POST AT POI DA1

# Hydrograph Summary Report

Hydraflow Hydrographs Extension for AutoCAD® Civil 3D® 2015 by Autodesk, Inc. v10.4

Hyd. No.	Hydrograph type (origin)	Peak flow (cfs)	Time interval (min)	Time to Peak (min)	Hyd. volume (cuft)	Inflow hyd(s)	Maximum elevation (ft)	Total strge used (cuft)	Hydrograph Description
1	SCS Runoff	1.348	2	720	3,240	-----	-----	-----	PRE DA1
2	SCS Runoff	1.021	2	720	2,454	-----	-----	-----	POST UNDETAINED DA1
3	SCS Runoff	0.523	2	720	1,199	-----	-----	-----	POST DETAINED DA1
4	Diversion1	0.523	2	720	842	3	-----	-----	VOLUME ABSTRACTION
5	Diversion2	0.019	2	874	357	3	-----	-----	POST AFTER BMP
6	Combine	1.021	2	720	2,811	2, 5	-----	-----	POST AT POI DA1
Charger DA1.gpw				Return Period: 2 Year				Sunday, 11 / 6 / 2016	

# Hydrograph Report

Hydraflow Hydrographs Extension for AutoCAD® Civil 3D® 2015 by Autodesk, Inc. v10.4


Sunday, 11 / 6 / 2016

## Hyd. No. 1

PRE DA1

Hydrograph type	= SCS Runoff	Peak discharge	= 1.348 cfs
Storm frequency	= 2 yrs	Time to peak	= 720 min
Time interval	= 2 min	Hyd. volume	= 3,240 cuft
Drainage area	= 1.360 ac	Curve number	= 73*
Basin Slope	= 0.0 %	Hydraulic length	= 0 ft
Tc method	= TR55	Time of conc. (Tc)	= 8.20 min
Total precip.	= 2.66 in	Distribution	= Type II
Storm duration	= 24 hrs	Shape factor	= 484

\* Composite (Area/CN) = [(0.100 x 58) + (0.150 x 71) + (0.040 x 78) + (0.010 x 55) + (0.390 x 70) + (0.670 x 77)] / 1.360

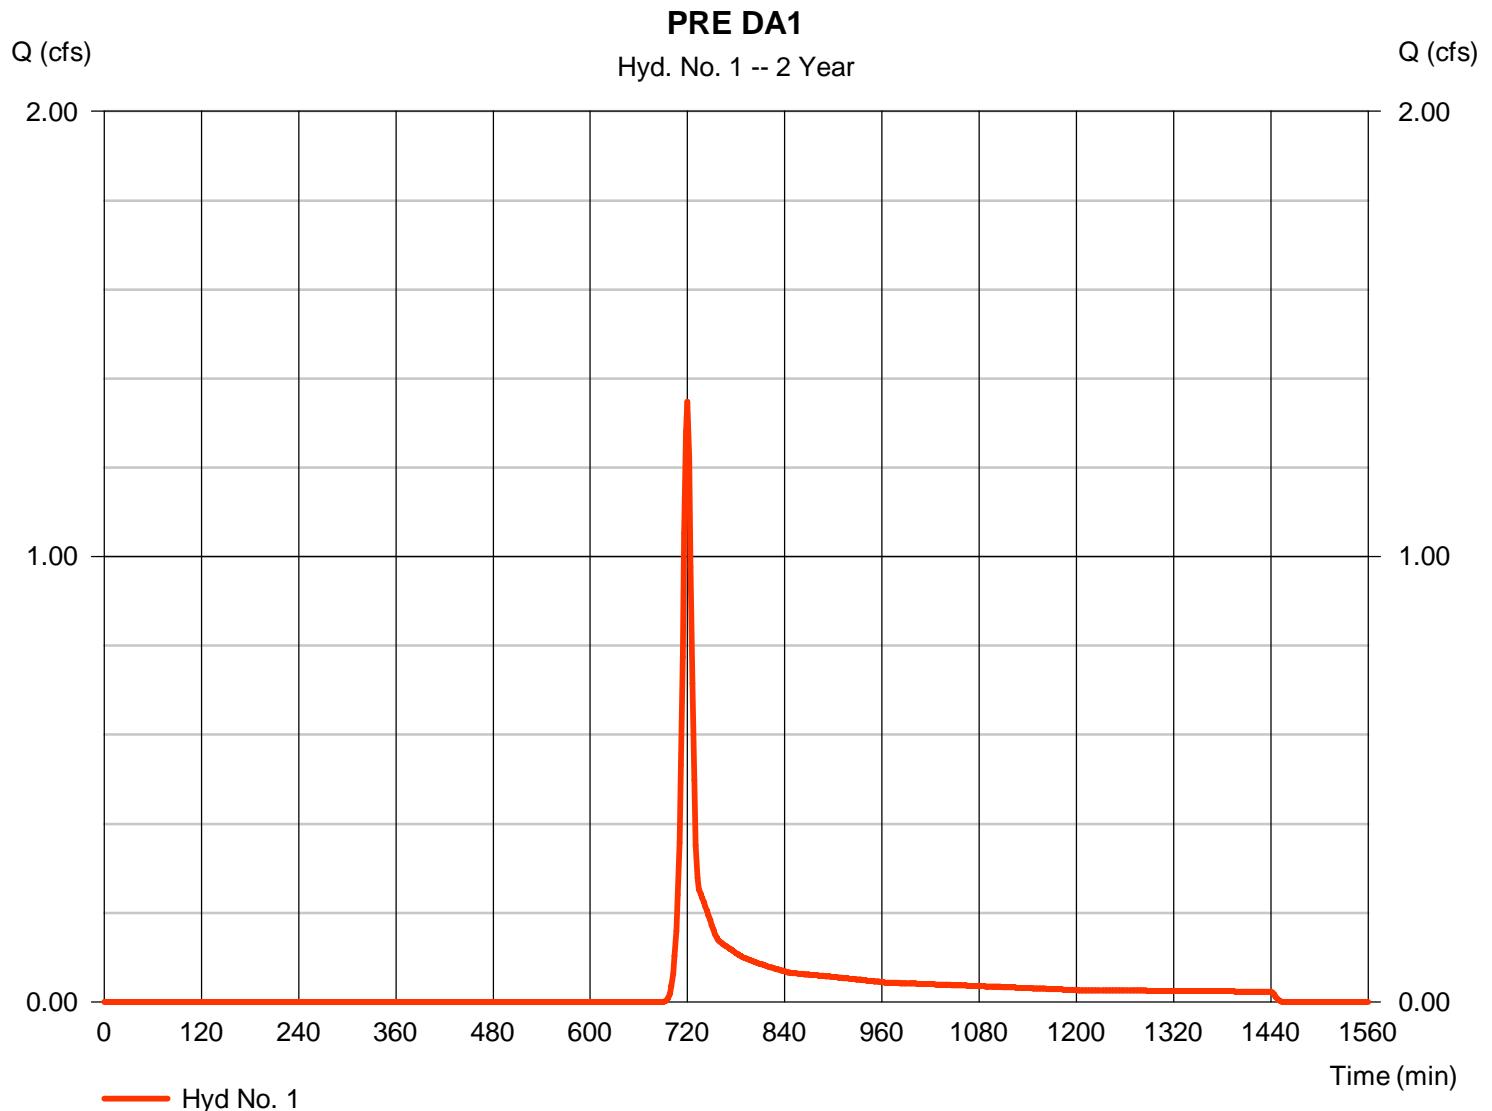

# TR55 Tc Worksheet

Hydraflow Hydrographs Extension for AutoCAD® Civil 3D® 2015 by Autodesk, Inc. v10.4

## Hyd. No. 1

PRE DA1

<u>Description</u>	<u>A</u>	<u>B</u>	<u>C</u>	<u>Totals</u>	
<b>Sheet Flow</b>					
Manning's n-value	= 0.240	0.011	0.011		
Flow length (ft)	= 50.0	0.0	0.0		
Two-year 24-hr precip. (in)	= 2.66	0.00	0.00		
Land slope (%)	= 3.00	0.00	0.00		
<b>Travel Time (min)</b>	<b>= 7.64</b>	<b>+ 0.00</b>	<b>+ 0.00</b>	<b>=</b>	<b>7.64</b>
<b>Shallow Concentrated Flow</b>					
Flow length (ft)	= 209.00	0.00	0.00		
Watercourse slope (%)	= 14.80	0.00	0.00		
Surface description	= Unpaved	Paved	Paved		
Average velocity (ft/s)	= 6.21	0.00	0.00		
<b>Travel Time (min)</b>	<b>= 0.56</b>	<b>+ 0.00</b>	<b>+ 0.00</b>	<b>=</b>	<b>0.56</b>
<b>Channel Flow</b>					
X sectional flow area (sqft)	= 0.00	0.00	0.00		
Wetted perimeter (ft)	= 0.00	0.00	0.00		
Channel slope (%)	= 0.00	0.00	0.00		
Manning's n-value	= 0.035	0.015	0.015		
Velocity (ft/s)	= 0.00	0.00	0.00		
Flow length (ft)	({0}) 0.0	0.0	0.0		
<b>Travel Time (min)</b>	<b>= 0.00</b>	<b>+ 0.00</b>	<b>+ 0.00</b>	<b>=</b>	<b>0.00</b>
<b>Total Travel Time, Tc .....</b>					<b>8.20 min</b>

# Hydrograph Report

Hydraflow Hydrographs Extension for AutoCAD® Civil 3D® 2015 by Autodesk, Inc. v10.4

Sunday, 11 / 6 / 2016

## Hyd. No. 2


### POST UNDETAINED DA1

Hydrograph type	= SCS Runoff	Peak discharge	= 1.021 cfs
Storm frequency	= 2 yrs	Time to peak	= 720 min
Time interval	= 2 min	Hyd. volume	= 2,454 cuft
Drainage area	= 1.030 ac	Curve number	= 73*
Basin Slope	= 0.0 %	Hydraulic length	= 0 ft
Tc method	= TR55	Time of conc. (Tc)	= 8.20 min
Total precip.	= 2.66 in	Distribution	= Type II
Storm duration	= 24 hrs	Shape factor	= 484

\* Composite (Area/CN) = [(0.100 x 58) + (0.320 x 71) + (0.160 x 78) + (0.050 x 70) + (0.400 x 77)] / 1.030

### POST UNDETAINED DA1

Hyd. No. 2 -- 2 Year

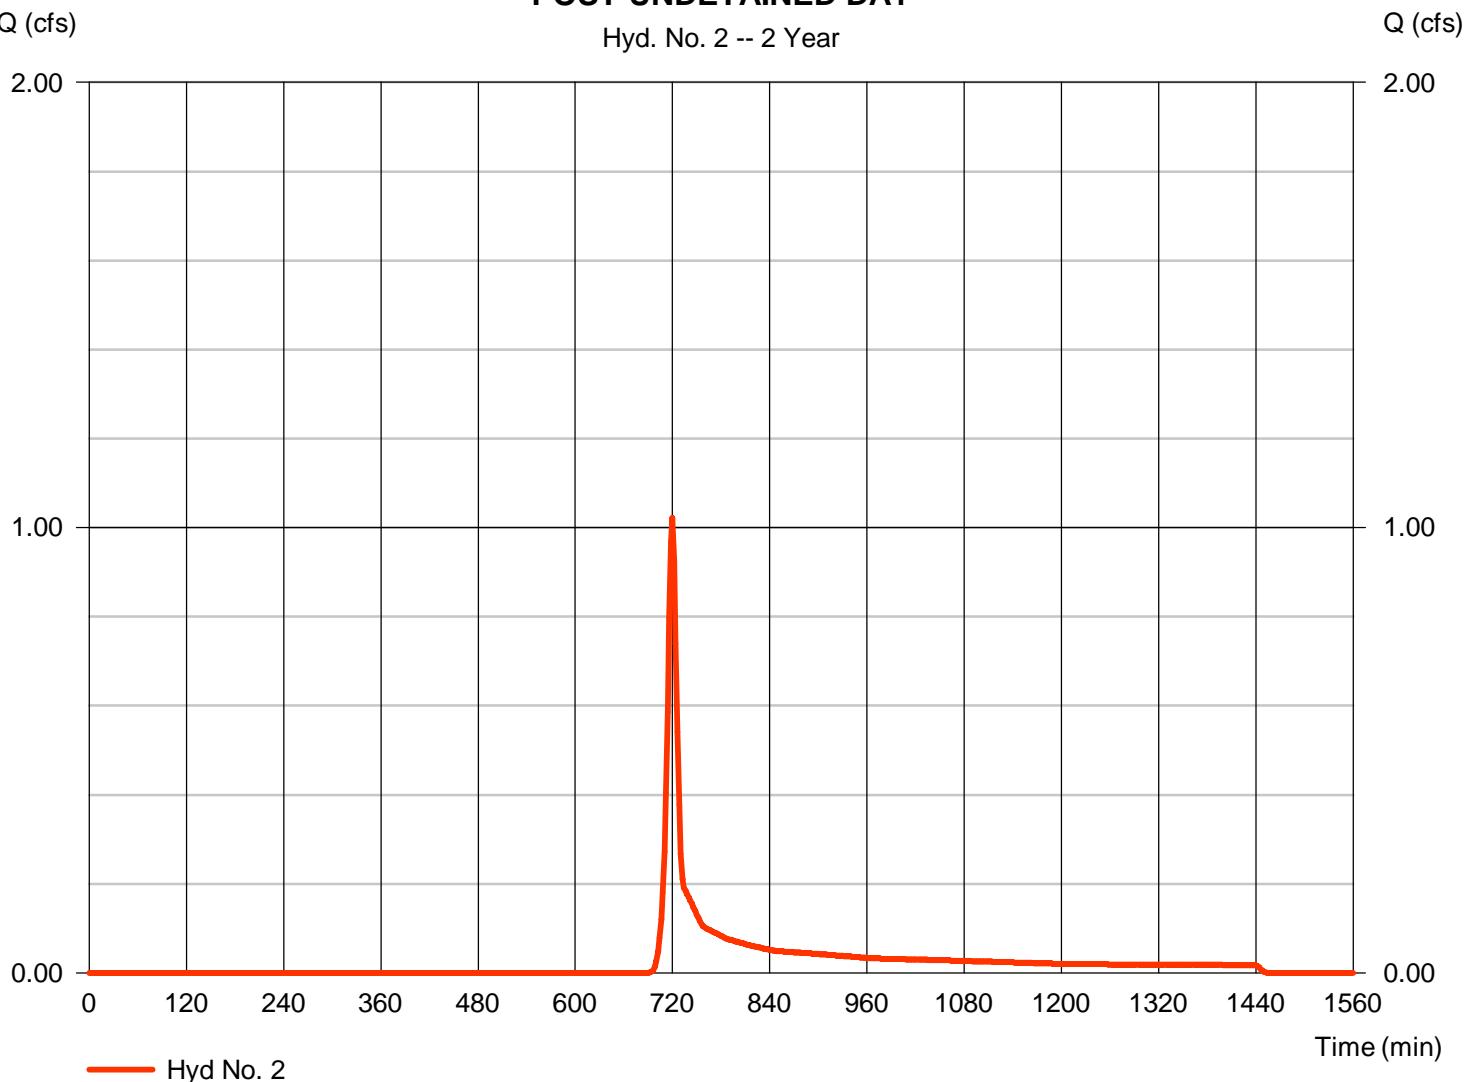

# TR55 Tc Worksheet

Hydraflow Hydrographs Extension for AutoCAD® Civil 3D® 2015 by Autodesk, Inc. v10.4

## Hyd. No. 2

POST UNDETAINED DA1

<u>Description</u>	<u>A</u>	<u>B</u>	<u>C</u>	<u>Totals</u>	
<b>Sheet Flow</b>					
Manning's n-value	= 0.240	0.011	0.011		
Flow length (ft)	= 50.0	0.0	0.0		
Two-year 24-hr precip. (in)	= 2.66	0.00	0.00		
Land slope (%)	= 3.00	0.00	0.00		
<b>Travel Time (min)</b>	<b>= 7.64</b>	<b>+ 0.00</b>	<b>+ 0.00</b>	<b>=</b>	<b>7.64</b>
<b>Shallow Concentrated Flow</b>					
Flow length (ft)	= 209.00	0.00	0.00		
Watercourse slope (%)	= 14.80	0.00	0.00		
Surface description	= Unpaved	Paved	Paved		
Average velocity (ft/s)	= 6.21	0.00	0.00		
<b>Travel Time (min)</b>	<b>= 0.56</b>	<b>+ 0.00</b>	<b>+ 0.00</b>	<b>=</b>	<b>0.56</b>
<b>Channel Flow</b>					
X sectional flow area (sqft)	= 0.00	0.00	0.00		
Wetted perimeter (ft)	= 0.00	0.00	0.00		
Channel slope (%)	= 0.00	0.00	0.00		
Manning's n-value	= 0.035	0.015	0.015		
Velocity (ft/s)	= 0.00	0.00	0.00		
Flow length (ft)	({0}) 0.0	0.0	0.0		
<b>Travel Time (min)</b>	<b>= 0.00</b>	<b>+ 0.00</b>	<b>+ 0.00</b>	<b>=</b>	<b>0.00</b>
<b>Total Travel Time, Tc .....</b>					<b>8.20 min</b>

# Hydrograph Report

Hydraflow Hydrographs Extension for AutoCAD® Civil 3D® 2015 by Autodesk, Inc. v10.4


Sunday, 11 / 6 / 2016

## Hyd. No. 3

### POST DETAINED DA1

Hydrograph type	= SCS Runoff	Peak discharge	= 0.523 cfs
Storm frequency	= 2 yrs	Time to peak	= 720 min
Time interval	= 2 min	Hyd. volume	= 1,199 cuft
Drainage area	= 0.330 ac	Curve number	= 80*
Basin Slope	= 0.0 %	Hydraulic length	= 0 ft
Tc method	= TR55	Time of conc. (Tc)	= 7.20 min
Total precip.	= 2.66 in	Distribution	= Type II
Storm duration	= 24 hrs	Shape factor	= 484

\* Composite (Area/CN) = [(0.100 x 89) + (0.030 x 91) + (0.010 x 58) + (0.080 x 71) + (0.110 x 78)] / 0.330

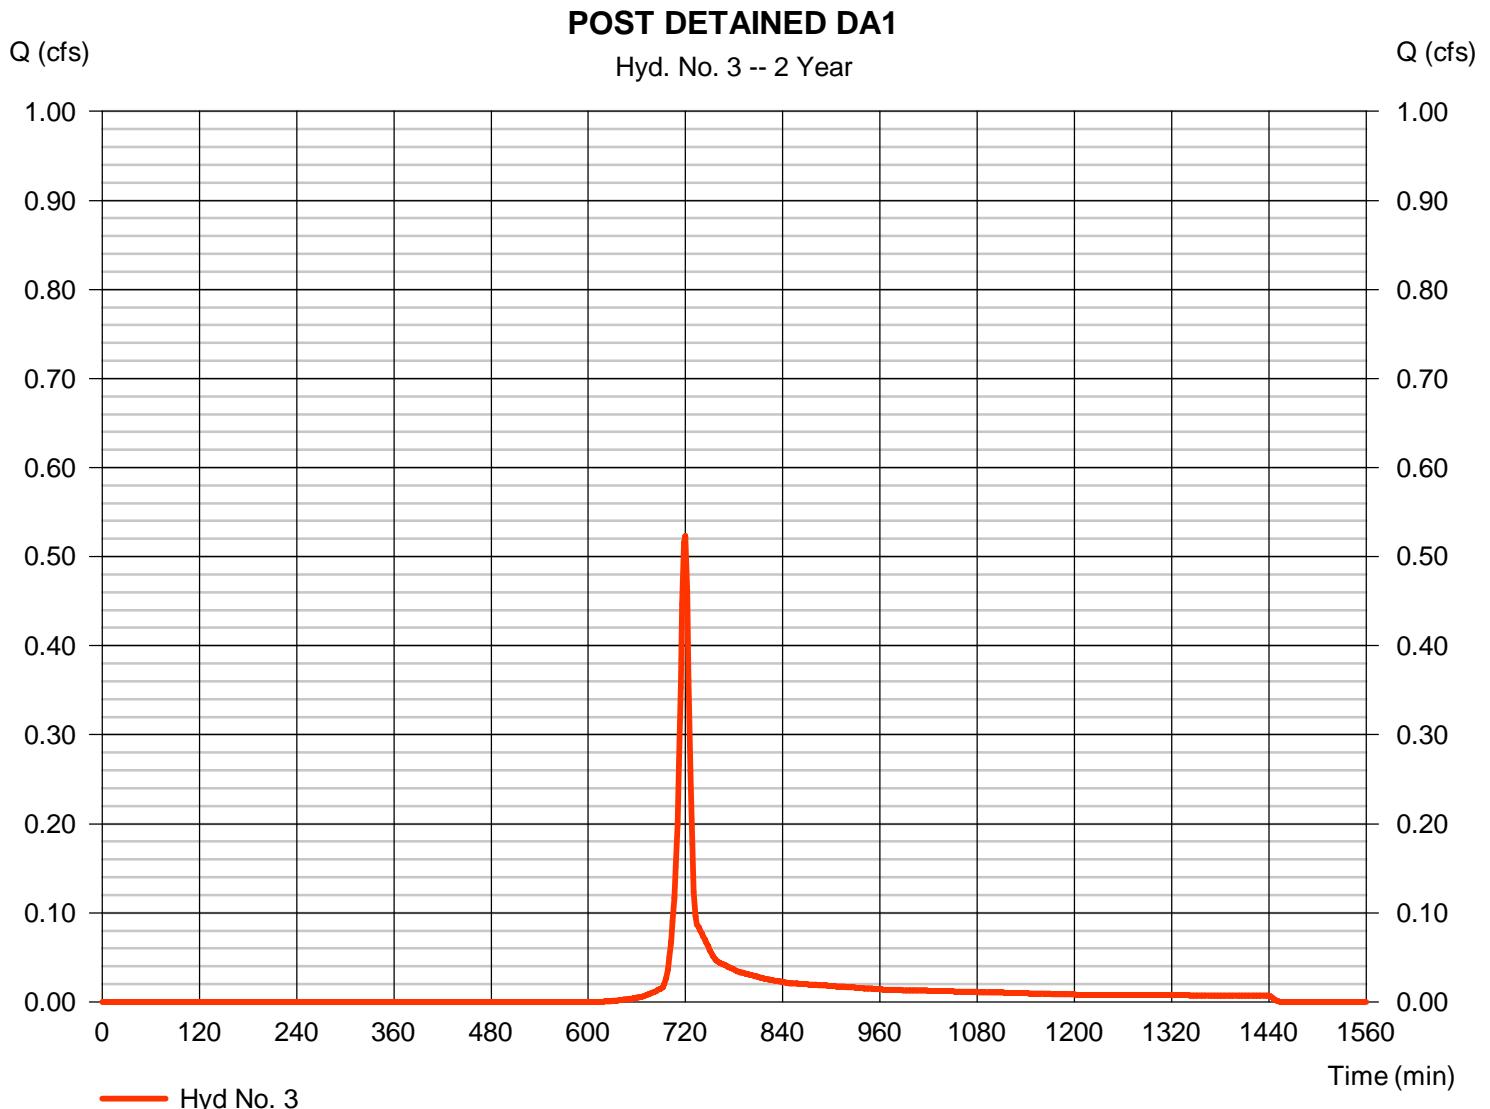

# TR55 Tc Worksheet

Hydraflow Hydrographs Extension for AutoCAD® Civil 3D® 2015 by Autodesk, Inc. v10.4

## Hyd. No. 3

POST DETAINED DA1

<u>Description</u>	<u>A</u>	<u>B</u>	<u>C</u>	<u>Totals</u>
<b>Sheet Flow</b>				
Manning's n-value	= 0.240	0.011	0.011	
Flow length (ft)	= 50.0	0.0	0.0	
Two-year 24-hr precip. (in)	= 2.66	0.00	0.00	
Land slope (%)	= 4.00	0.00	0.00	
<b>Travel Time (min)</b>	<b>= 6.81</b>	<b>+ 0.00</b>	<b>+ 0.00</b>	<b>= 6.81</b>
<b>Shallow Concentrated Flow</b>				
Flow length (ft)	= 27.00	0.00	0.00	
Watercourse slope (%)	= 5.20	0.00	0.00	
Surface description	= Paved	Paved	Paved	
Average velocity (ft/s)	= 4.64	0.00	0.00	
<b>Travel Time (min)</b>	<b>= 0.10</b>	<b>+ 0.00</b>	<b>+ 0.00</b>	<b>= 0.10</b>
<b>Channel Flow</b>				
X sectional flow area (sqft)	= 0.09	0.00	0.00	
Wetted perimeter (ft)	= 1.05	0.00	0.00	
Channel slope (%)	= 17.50	0.00	0.00	
Manning's n-value	= 0.015	0.015	0.015	
Velocity (ft/s)	= 8.01	0.00	0.00	
Flow length (ft)	({0}) 117.0	0.0	0.0	
<b>Travel Time (min)</b>	<b>= 0.24</b>	<b>+ 0.00</b>	<b>+ 0.00</b>	<b>= 0.24</b>
<b>Total Travel Time, Tc .....</b>				<b>7.20 min</b>

# Hydrograph Report


Hydraflow Hydrographs Extension for AutoCAD® Civil 3D® 2015 by Autodesk, Inc. v10.4

Sunday, 11 / 6 / 2016

## Hyd. No. 4

### VOLUME ABSTRACTION

Hydrograph type	= Diversion1	Peak discharge	= 0.523 cfs
Storm frequency	= 2 yrs	Time to peak	= 720 min
Time interval	= 2 min	Hyd. volume	= 842 cuft
Inflow hydrograph	= 3 - POST DETAINED DA1	2nd diverted hyd.	= 5
Diversion method	= First Flush Volume	Volume Up To	= 840.00 cuft

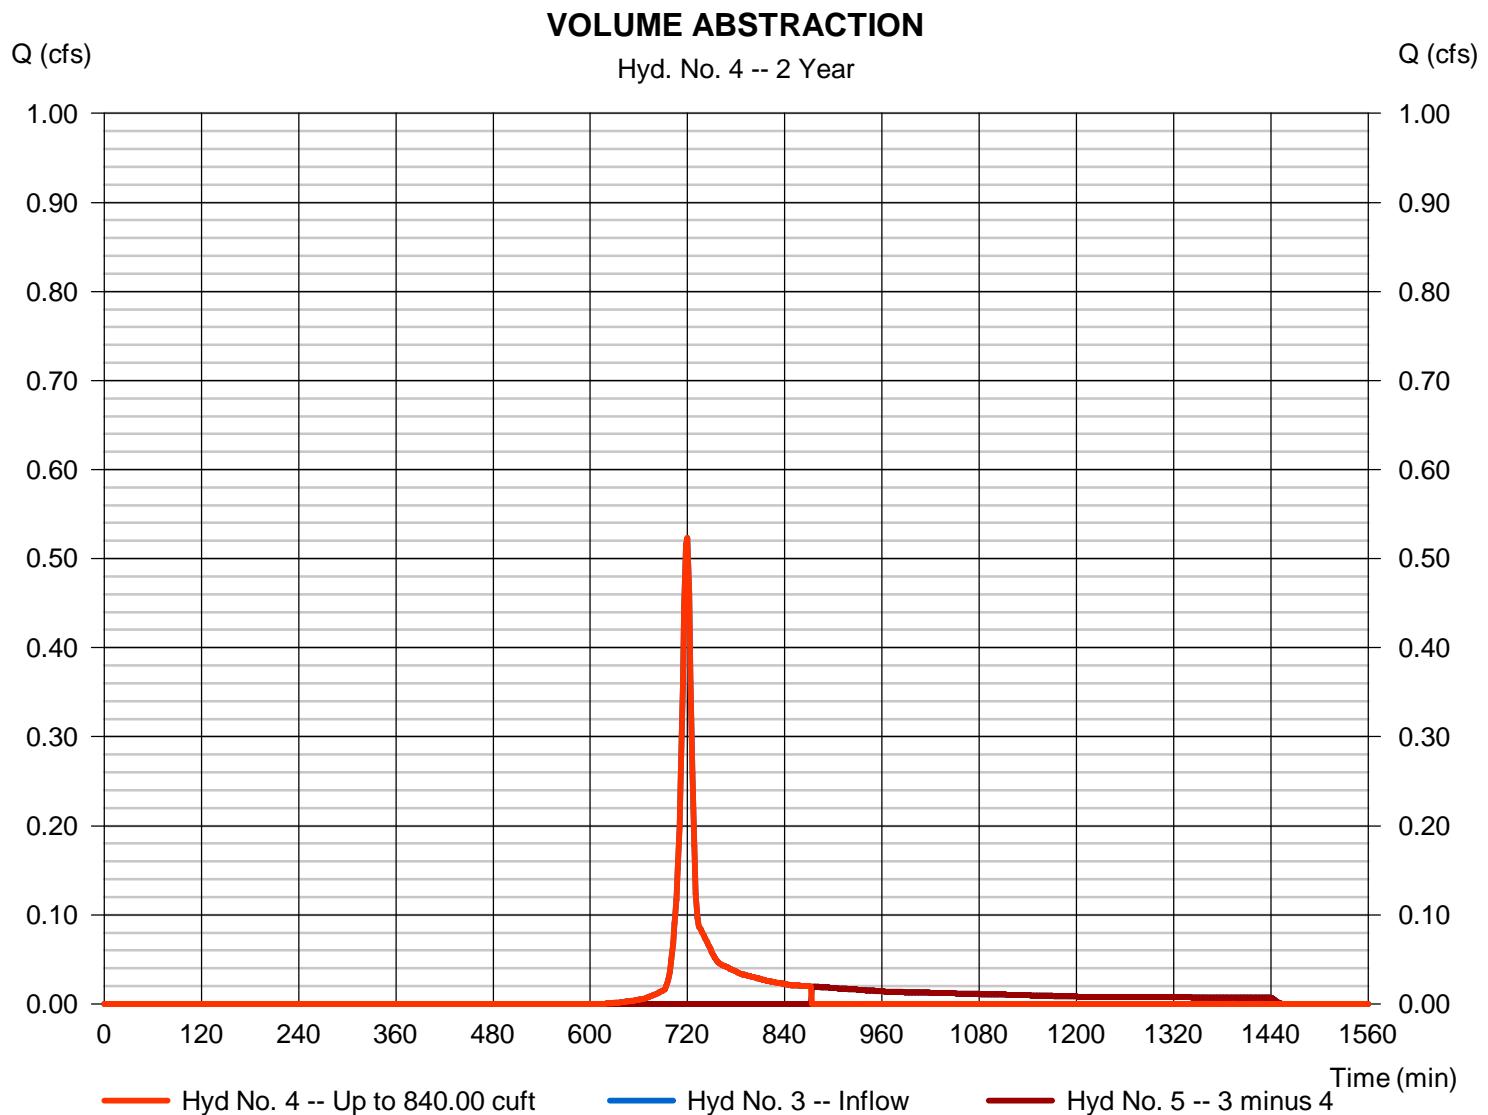

# Hydrograph Report


Hydraflow Hydrographs Extension for AutoCAD® Civil 3D® 2015 by Autodesk, Inc. v10.4

Sunday, 11 / 6 / 2016

## Hyd. No. 5

### POST AFTER BMP

Hydrograph type	= Diversion2	Peak discharge	= 0.019 cfs
Storm frequency	= 2 yrs	Time to peak	= 874 min
Time interval	= 2 min	Hyd. volume	= 357 cuft
Inflow hydrograph	= 3 - POST DETAINED DA1	2nd diverted hyd.	= 4
Diversion method	= First Flush Volume	Volume Up To	= 840.00 cuft

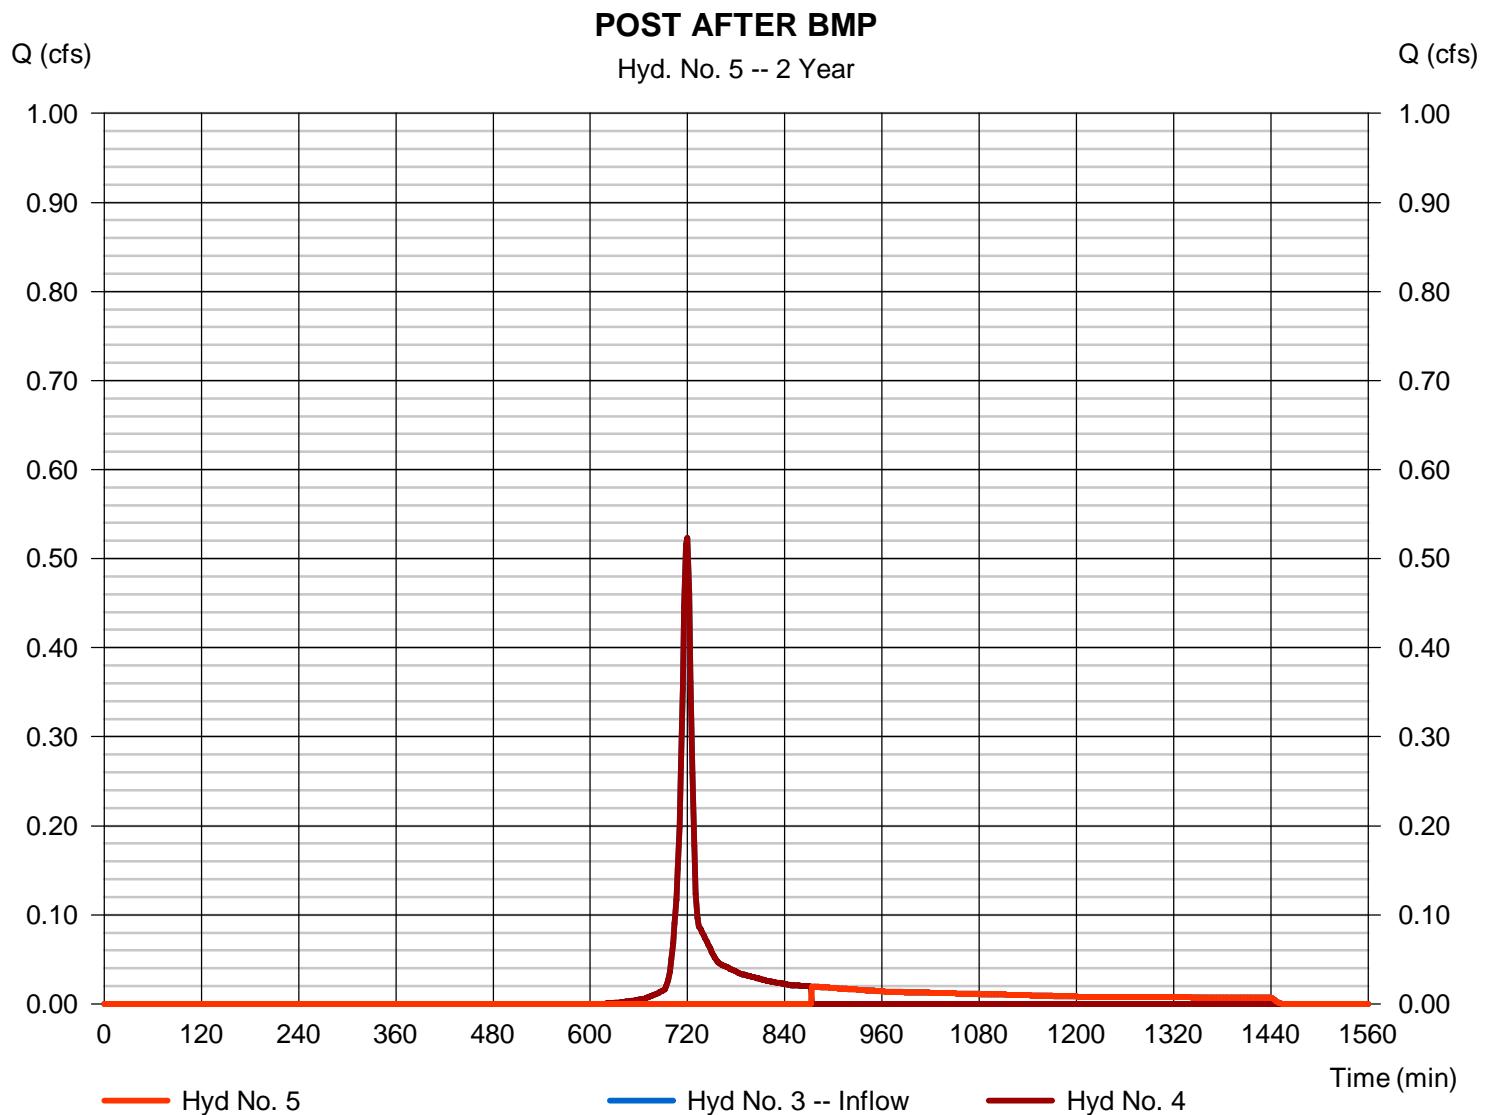

# Hydrograph Report


Hydraflow Hydrographs Extension for AutoCAD® Civil 3D® 2015 by Autodesk, Inc. v10.4

Sunday, 11 / 6 / 2016

## Hyd. No. 6

### POST AT POI DA1

Hydrograph type	= Combine	Peak discharge	= 1.021 cfs
Storm frequency	= 2 yrs	Time to peak	= 720 min
Time interval	= 2 min	Hyd. volume	= 2,811 cuft
Inflow hyds.	= 2, 5	Contrib. drain. area	= 1.030 ac

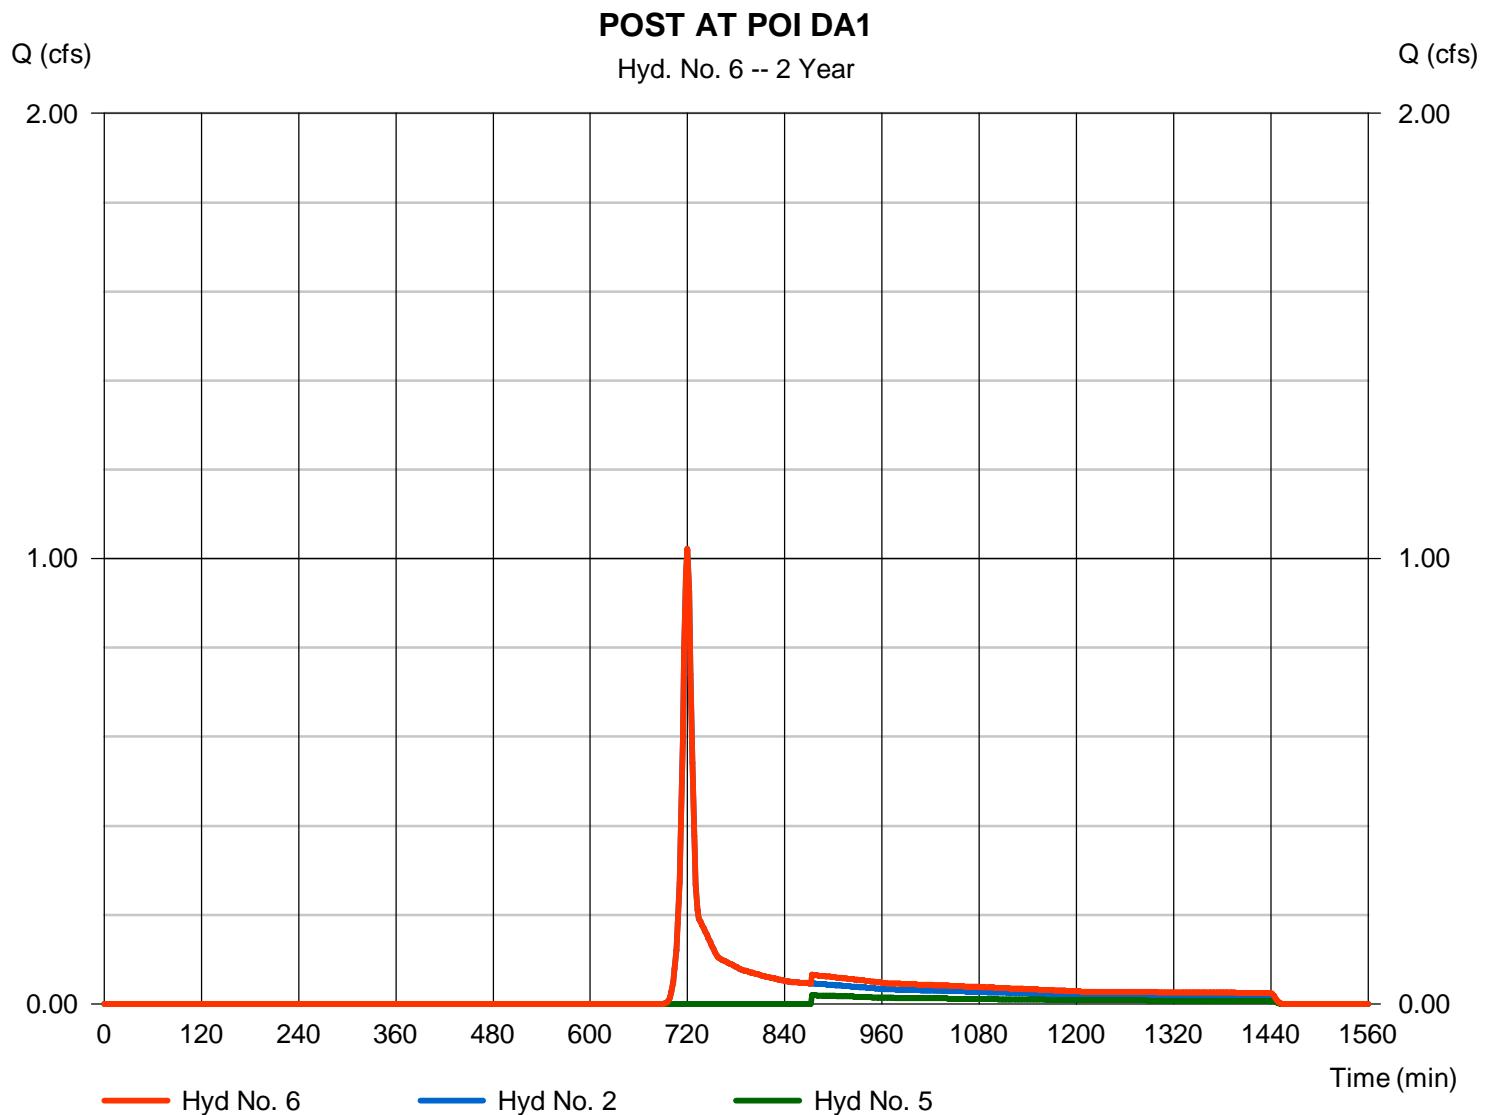

# Hydrograph Summary Report

Hydraflow Hydrographs Extension for AutoCAD® Civil 3D® 2015 by Autodesk, Inc. v10.4

Hyd. No.	Hydrograph type (origin)	Peak flow (cfs)	Time interval (min)	Time to Peak (min)	Hyd. volume (cuft)	Inflow hyd(s)	Maximum elevation (ft)	Total strge used (cuft)	Hydrograph Description
1	SCS Runoff	3.025	2	720	6,944	-----	-----	-----	PRE DA1
2	SCS Runoff	2.291	2	720	5,259	-----	-----	-----	POST UNDETAINED DA1
3	SCS Runoff	0.996	2	718	2,278	-----	-----	-----	POST DETAINED DA1
4	Diversion1	0.996	2	718	941	3	-----	-----	VOLUME ABSTRACTION
5	Diversion2	0.668	2	724	1,337	3	-----	-----	POST AFTER BMP
6	Combine	2.291	2	720	6,597	2, 5	-----	-----	POST AT POI DA1
Charger DA1.gpw				Return Period: 10 Year			Sunday, 11 / 6 / 2016		

# Hydrograph Report

Hydraflow Hydrographs Extension for AutoCAD® Civil 3D® 2015 by Autodesk, Inc. v10.4


Sunday, 11 / 6 / 2016

## Hyd. No. 1

PRE DA1

Hydrograph type	= SCS Runoff	Peak discharge	= 3.025 cfs
Storm frequency	= 10 yrs	Time to peak	= 720 min
Time interval	= 2 min	Hyd. volume	= 6,944 cuft
Drainage area	= 1.360 ac	Curve number	= 73*
Basin Slope	= 0.0 %	Hydraulic length	= 0 ft
Tc method	= TR55	Time of conc. (Tc)	= 8.20 min
Total precip.	= 3.83 in	Distribution	= Type II
Storm duration	= 24 hrs	Shape factor	= 484

\* Composite (Area/CN) = [(0.100 x 58) + (0.150 x 71) + (0.040 x 78) + (0.010 x 55) + (0.390 x 70) + (0.670 x 77)] / 1.360

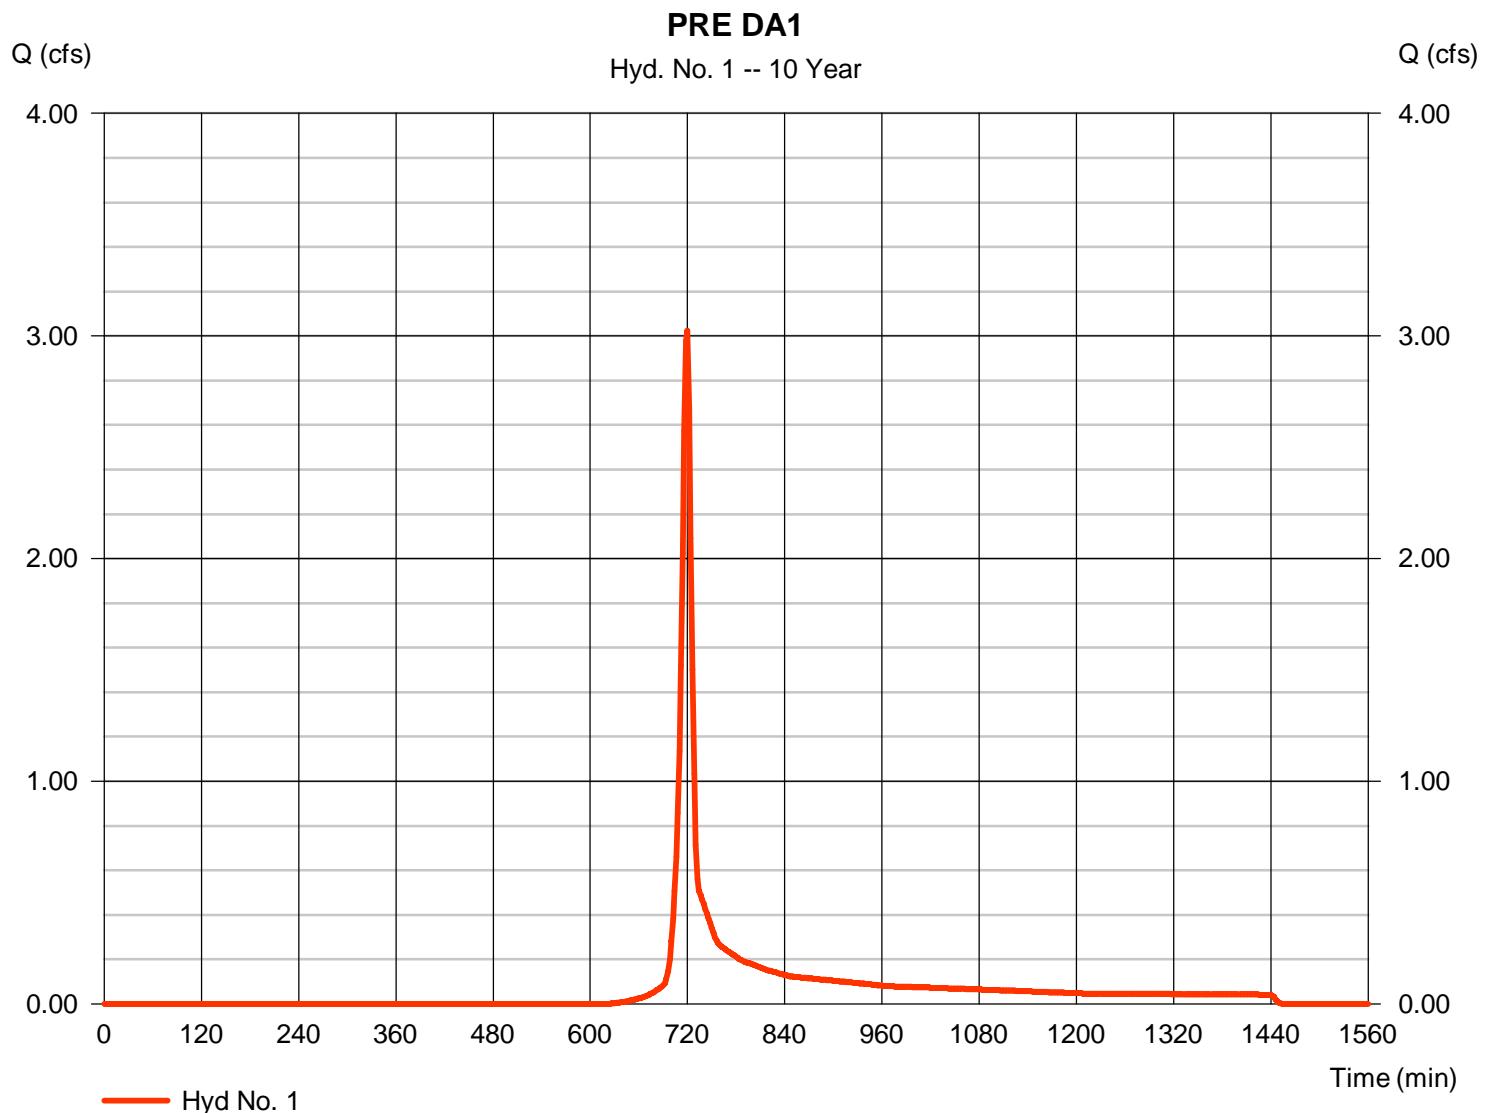

# Hydrograph Report

## Hyd. No. 2


### POST UNDETAINED DA1

Hydrograph type	= SCS Runoff	Peak discharge	= 2.291 cfs
Storm frequency	= 10 yrs	Time to peak	= 720 min
Time interval	= 2 min	Hyd. volume	= 5,259 cuft
Drainage area	= 1.030 ac	Curve number	= 73*
Basin Slope	= 0.0 %	Hydraulic length	= 0 ft
Tc method	= TR55	Time of conc. (Tc)	= 8.20 min
Total precip.	= 3.83 in	Distribution	= Type II
Storm duration	= 24 hrs	Shape factor	= 484

\* Composite (Area/CN) = [(0.100 x 58) + (0.320 x 71) + (0.160 x 78) + (0.050 x 70) + (0.400 x 77)] / 1.030

### POST UNDETAINED DA1

Hyd. No. 2 -- 10 Year

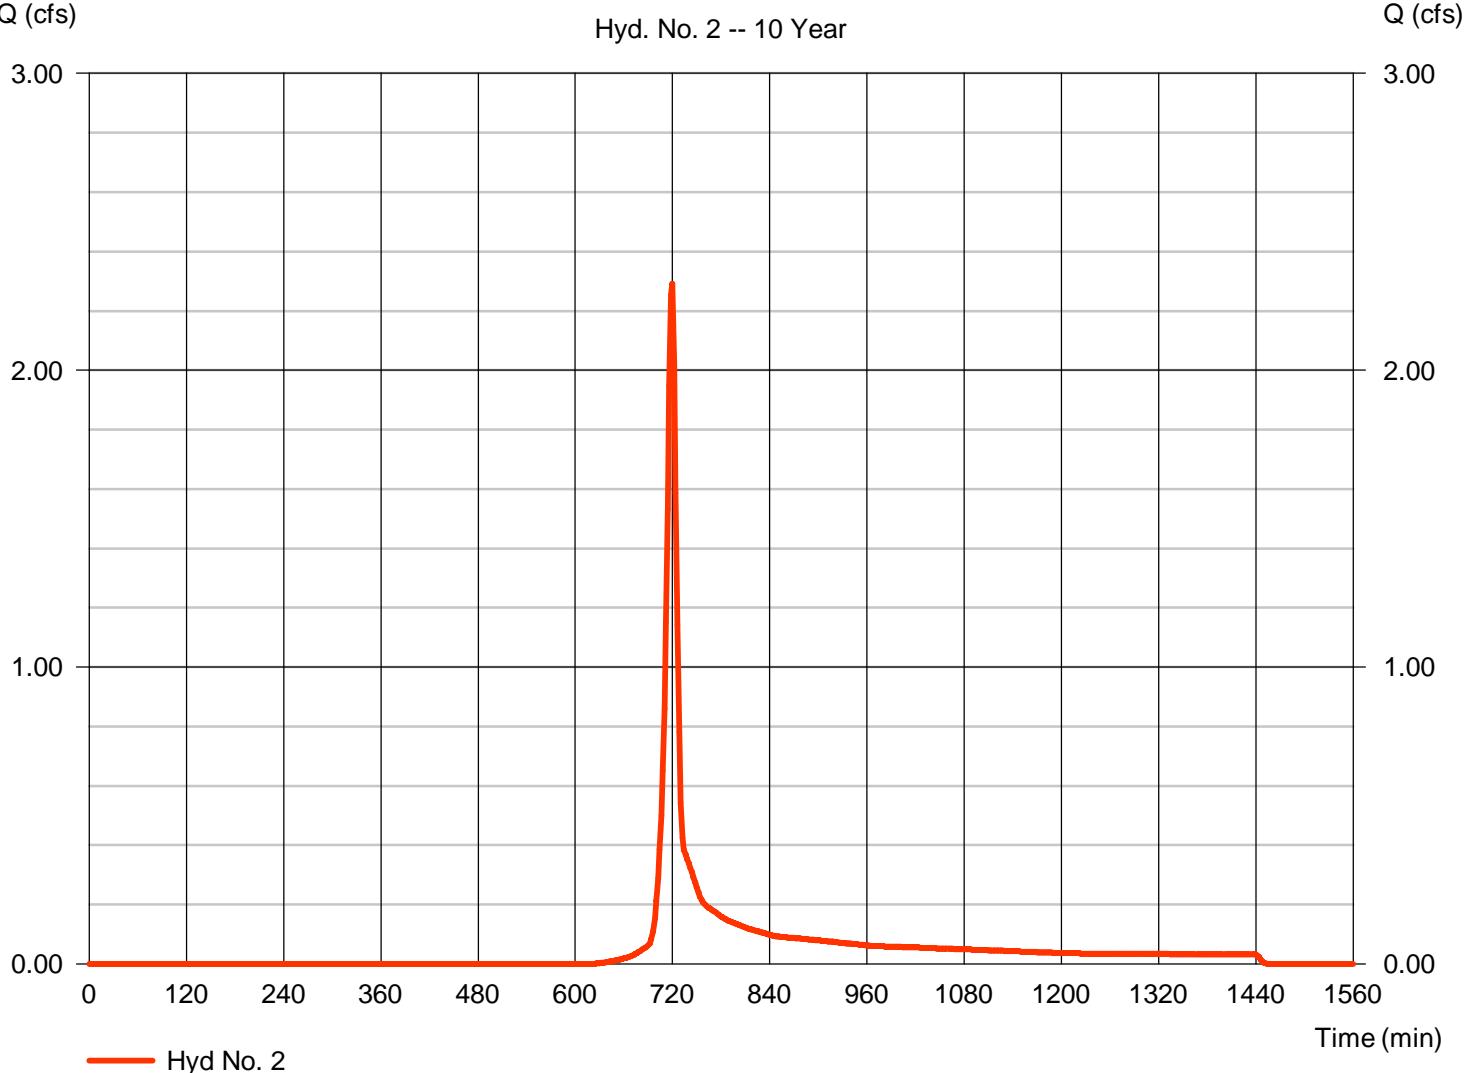

# Hydrograph Report

Hydraflow Hydrographs Extension for AutoCAD® Civil 3D® 2015 by Autodesk, Inc. v10.4

Sunday, 11 / 6 / 2016

## Hyd. No. 3


### POST DETAINED DA1

Hydrograph type	= SCS Runoff	Peak discharge	= 0.996 cfs
Storm frequency	= 10 yrs	Time to peak	= 718 min
Time interval	= 2 min	Hyd. volume	= 2,278 cuft
Drainage area	= 0.330 ac	Curve number	= 80*
Basin Slope	= 0.0 %	Hydraulic length	= 0 ft
Tc method	= TR55	Time of conc. (Tc)	= 7.20 min
Total precip.	= 3.83 in	Distribution	= Type II
Storm duration	= 24 hrs	Shape factor	= 484

\* Composite (Area/CN) = [(0.100 x 89) + (0.030 x 91) + (0.010 x 58) + (0.080 x 71) + (0.110 x 78)] / 0.330

### POST DETAINED DA1

Hyd. No. 3 -- 10 Year

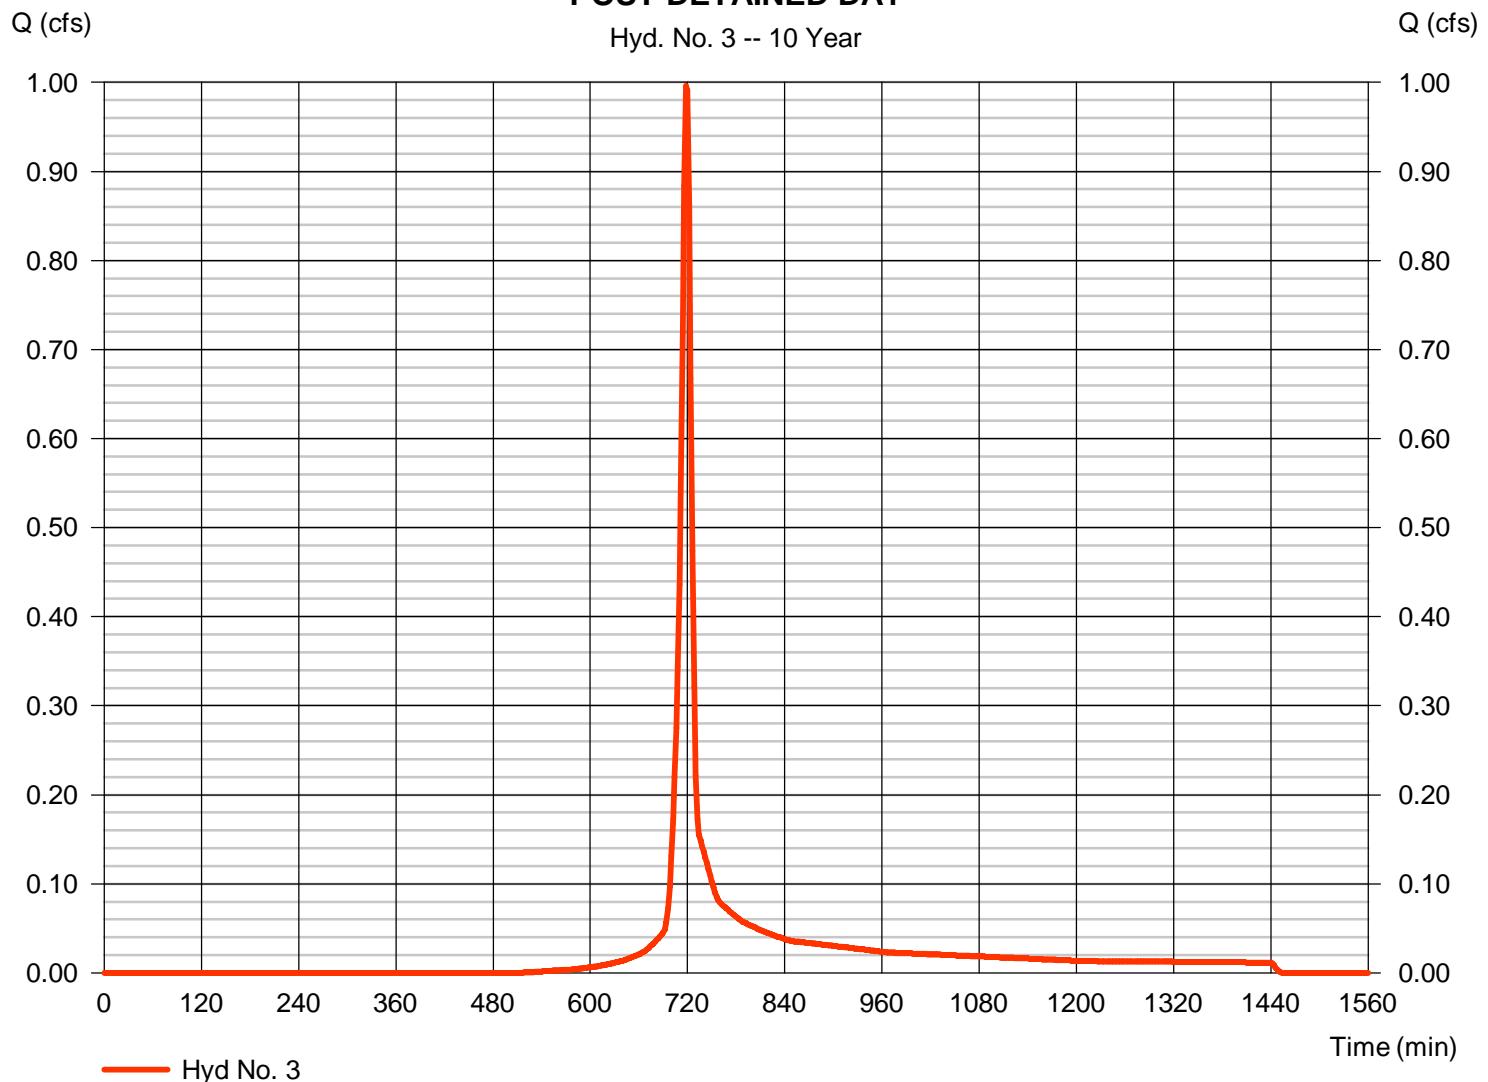

# Hydrograph Report


Hydraflow Hydrographs Extension for AutoCAD® Civil 3D® 2015 by Autodesk, Inc. v10.4

Sunday, 11 / 6 / 2016

## Hyd. No. 4

### VOLUME ABSTRACTION

Hydrograph type	= Diversion1	Peak discharge	= 0.996 cfs
Storm frequency	= 10 yrs	Time to peak	= 718 min
Time interval	= 2 min	Hyd. volume	= 941 cuft
Inflow hydrograph	= 3 - POST DETAINED DA1	2nd diverted hyd.	= 5
Diversion method	= First Flush Volume	Volume Up To	= 840.00 cuft

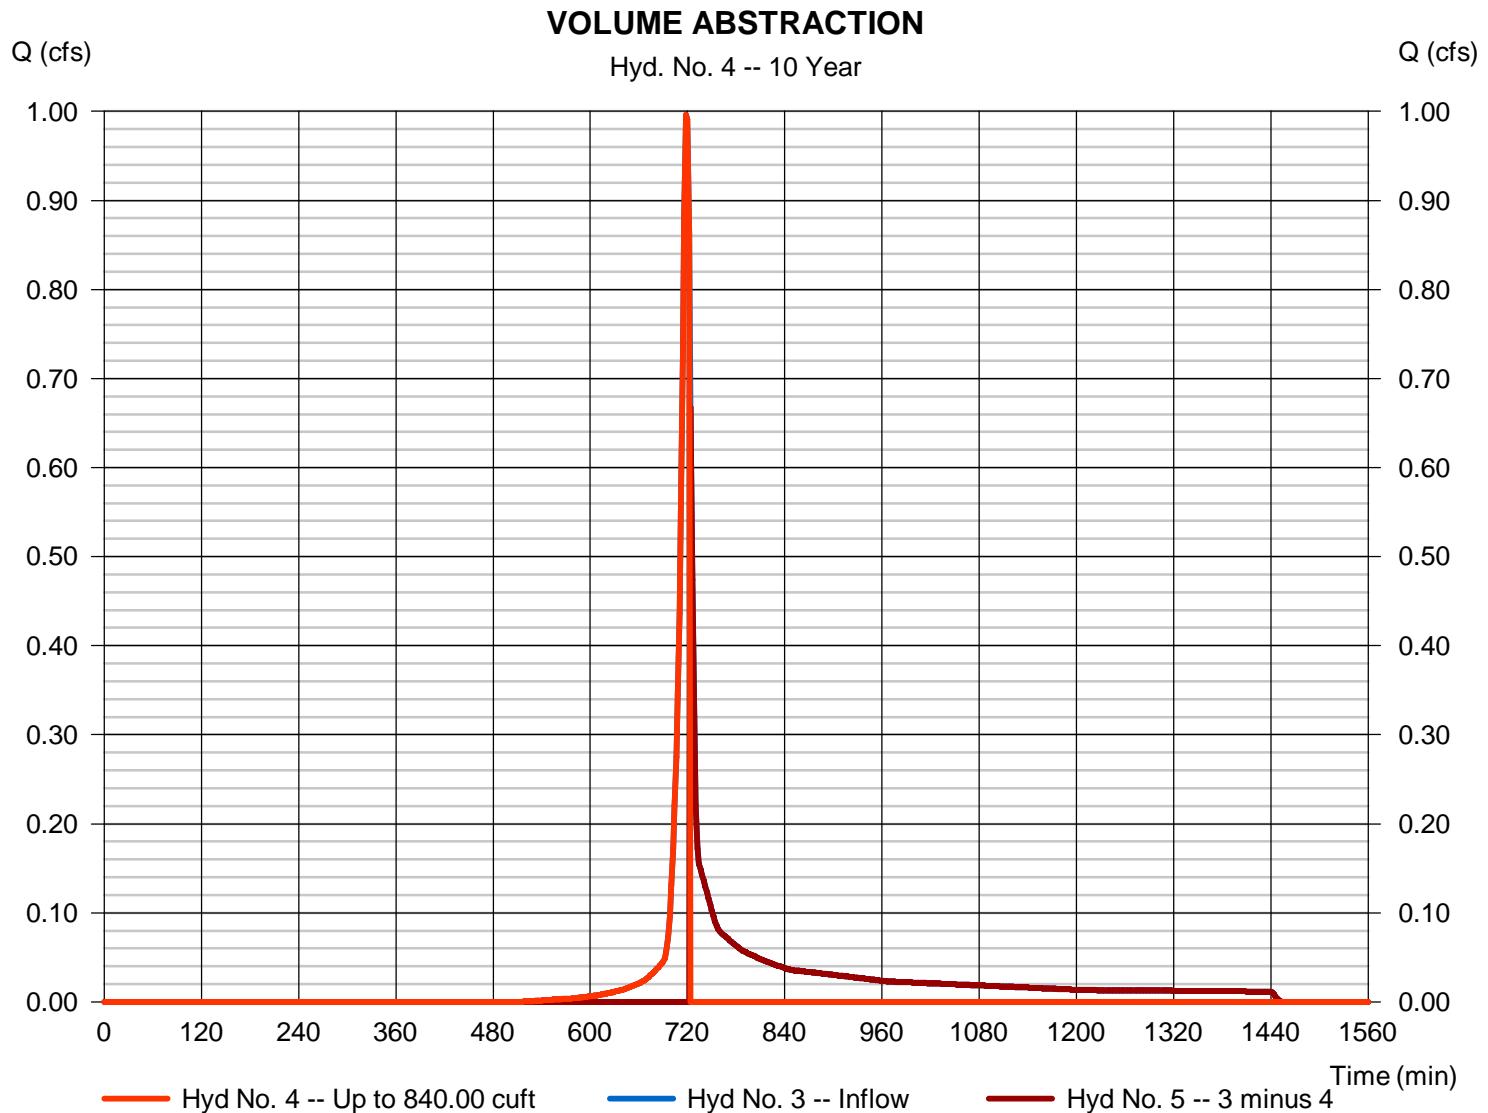

# Hydrograph Report


Hydraflow Hydrographs Extension for AutoCAD® Civil 3D® 2015 by Autodesk, Inc. v10.4

Sunday, 11 / 6 / 2016

## Hyd. No. 5

### POST AFTER BMP

Hydrograph type	= Diversion2	Peak discharge	= 0.668 cfs
Storm frequency	= 10 yrs	Time to peak	= 724 min
Time interval	= 2 min	Hyd. volume	= 1,337 cuft
Inflow hydrograph	= 3 - POST DETAINED DA1	2nd diverted hyd.	= 4
Diversion method	= First Flush Volume	Volume Up To	= 840.00 cuft

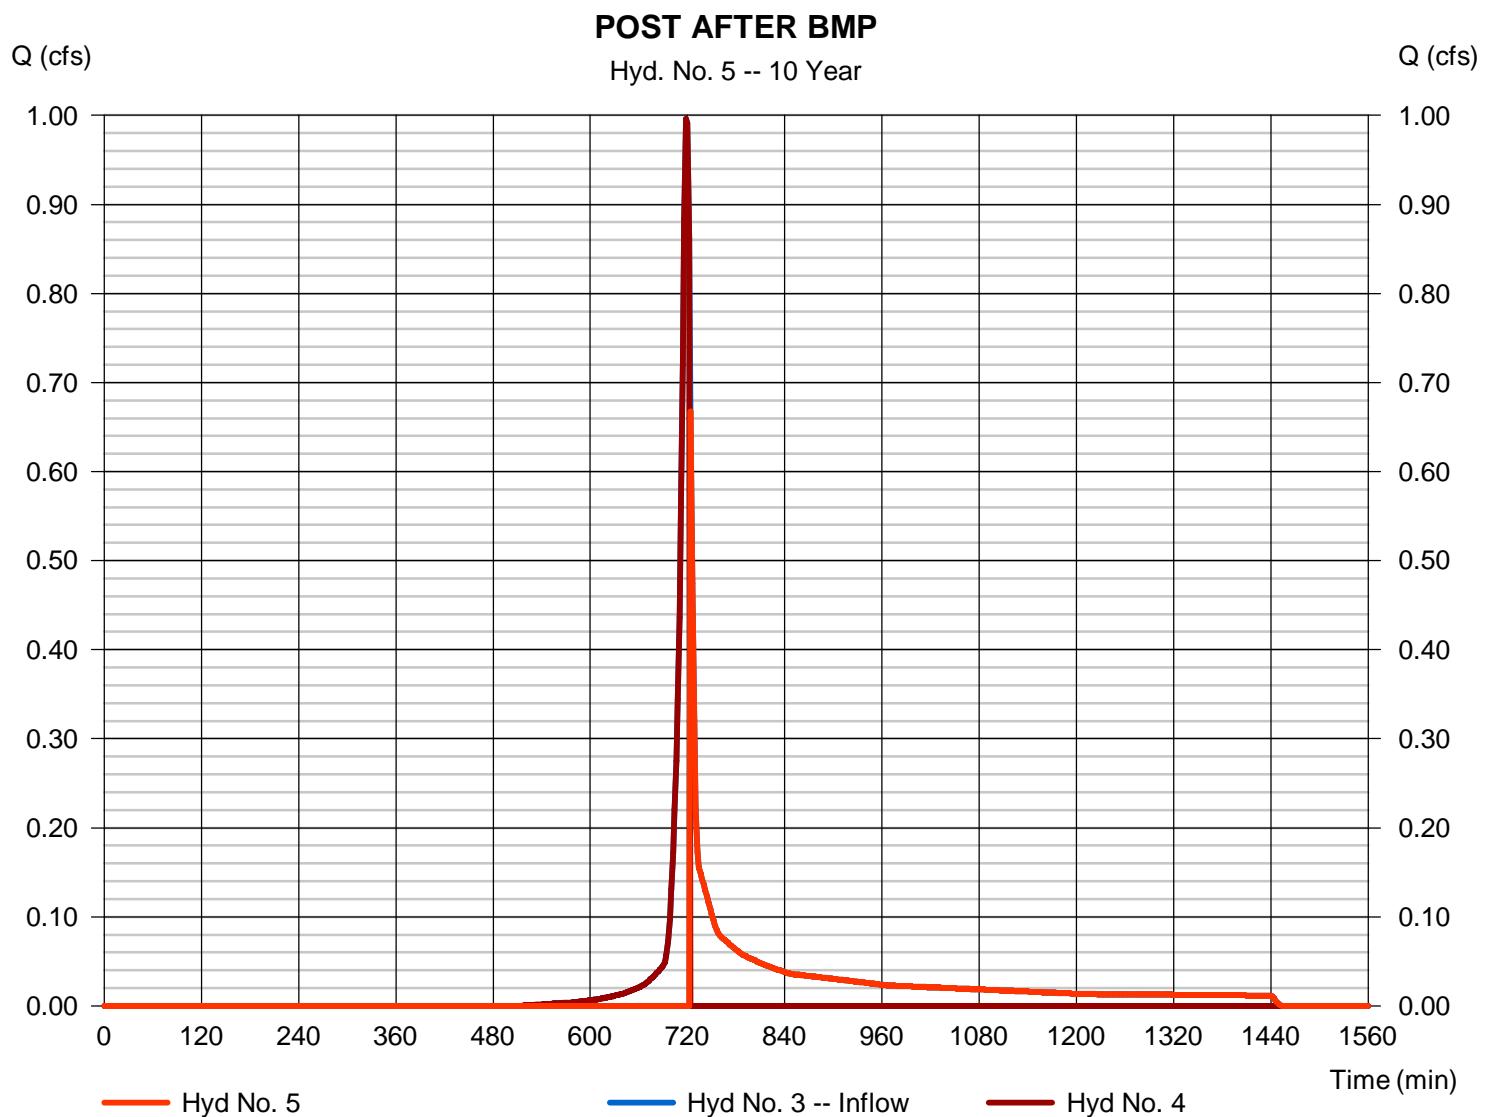

# Hydrograph Report


Hydraflow Hydrographs Extension for AutoCAD® Civil 3D® 2015 by Autodesk, Inc. v10.4

Sunday, 11 / 6 / 2016

## Hyd. No. 6

### POST AT POI DA1

Hydrograph type	= Combine	Peak discharge	= 2.291 cfs
Storm frequency	= 10 yrs	Time to peak	= 720 min
Time interval	= 2 min	Hyd. volume	= 6,597 cuft
Inflow hyds.	= 2, 5	Contrib. drain. area	= 1.030 ac

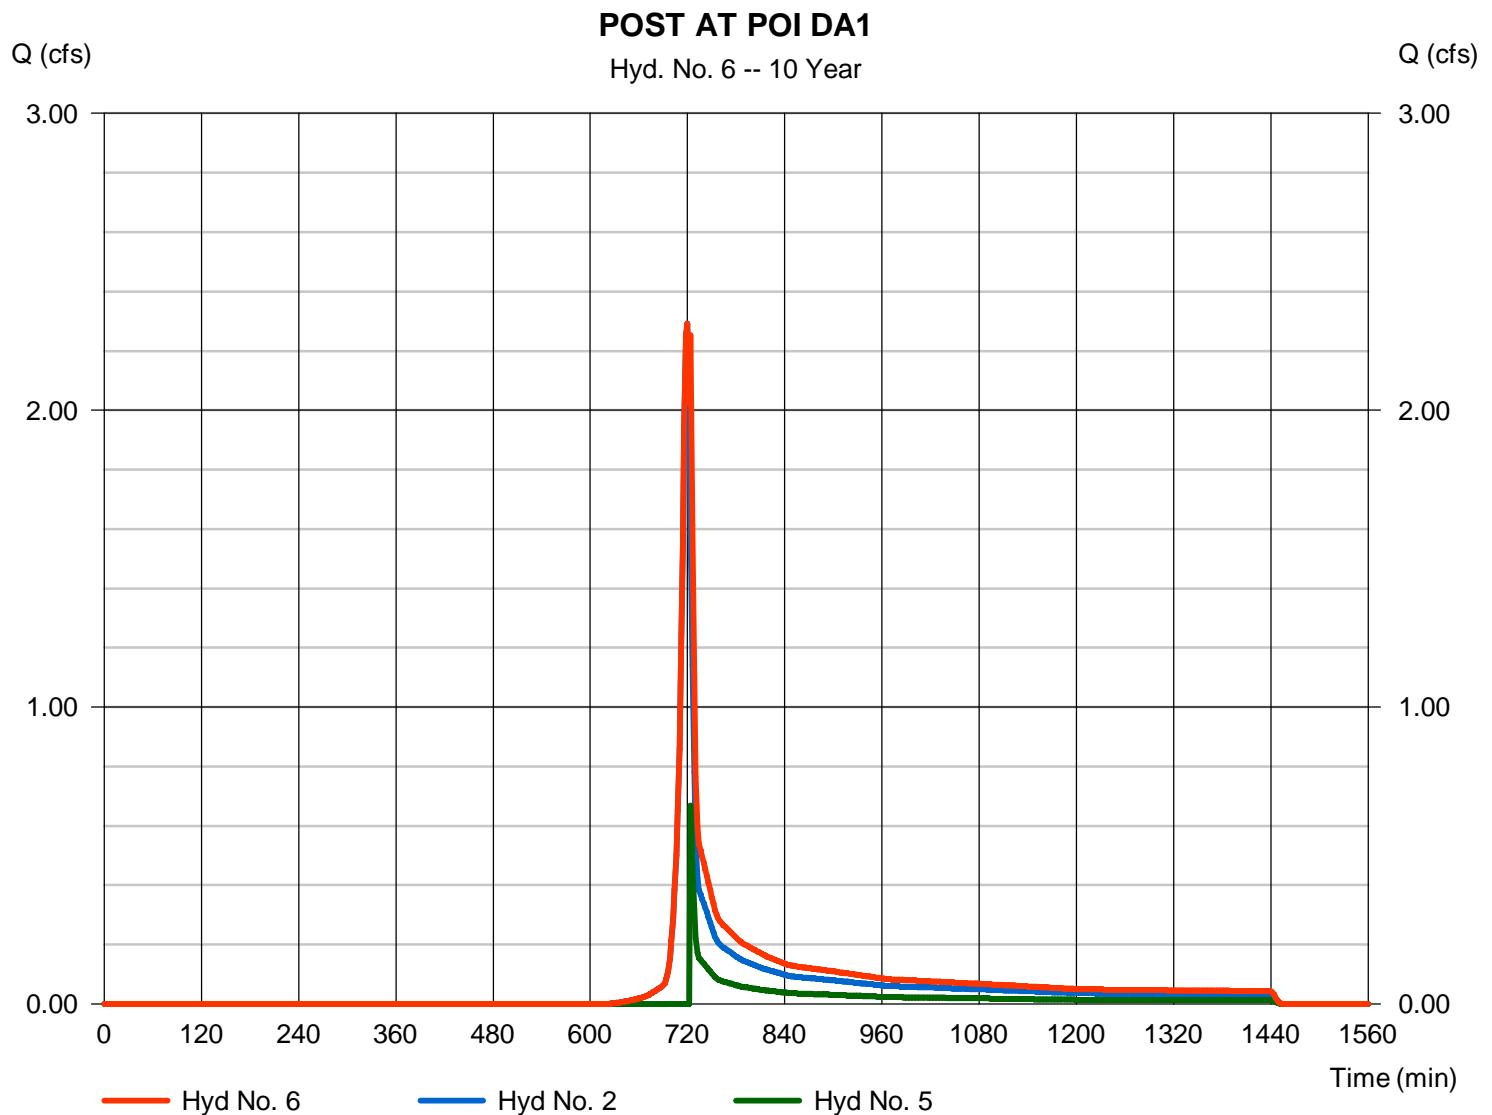

# Hydrograph Summary Report

Hydraflow Hydrographs Extension for AutoCAD® Civil 3D® 2015 by Autodesk, Inc. v10.4

Hyd. No.	Hydrograph type (origin)	Peak flow (cfs)	Time interval (min)	Time to Peak (min)	Hyd. volume (cuft)	Inflow hyd(s)	Maximum elevation (ft)	Total strge used (cuft)	Hydrograph Description
1	SCS Runoff	5.326	2	718	12,195	-----	-----	-----	PRE DA1
2	SCS Runoff	4.033	2	718	9,236	-----	-----	-----	POST UNDETAINED DA1
3	SCS Runoff	1.617	2	718	3,717	-----	-----	-----	POST DETAINED DA1
4	Diversion1	1.203	2	714	965	3	-----	-----	VOLUME ABSTRACTION
5	Diversion2	1.617	2	718	2,753	3	-----	-----	POST AFTER BMP
6	Combine	5.650	2	718	11,988	2, 5	-----	-----	POST AT POI DA1
Charger DA1.gpw				Return Period: 50 Year				Sunday, 11 / 6 / 2016	

# Hydrograph Report

Hydraflow Hydrographs Extension for AutoCAD® Civil 3D® 2015 by Autodesk, Inc. v10.4


Sunday, 11 / 6 / 2016

## Hyd. No. 1

PRE DA1

Hydrograph type	= SCS Runoff	Peak discharge	= 5.326 cfs
Storm frequency	= 50 yrs	Time to peak	= 718 min
Time interval	= 2 min	Hyd. volume	= 12,195 cuft
Drainage area	= 1.360 ac	Curve number	= 73*
Basin Slope	= 0.0 %	Hydraulic length	= 0 ft
Tc method	= TR55	Time of conc. (Tc)	= 8.20 min
Total precip.	= 5.24 in	Distribution	= Type II
Storm duration	= 24 hrs	Shape factor	= 484

\* Composite (Area/CN) = [(0.100 x 58) + (0.150 x 71) + (0.040 x 78) + (0.010 x 55) + (0.390 x 70) + (0.670 x 77)] / 1.360

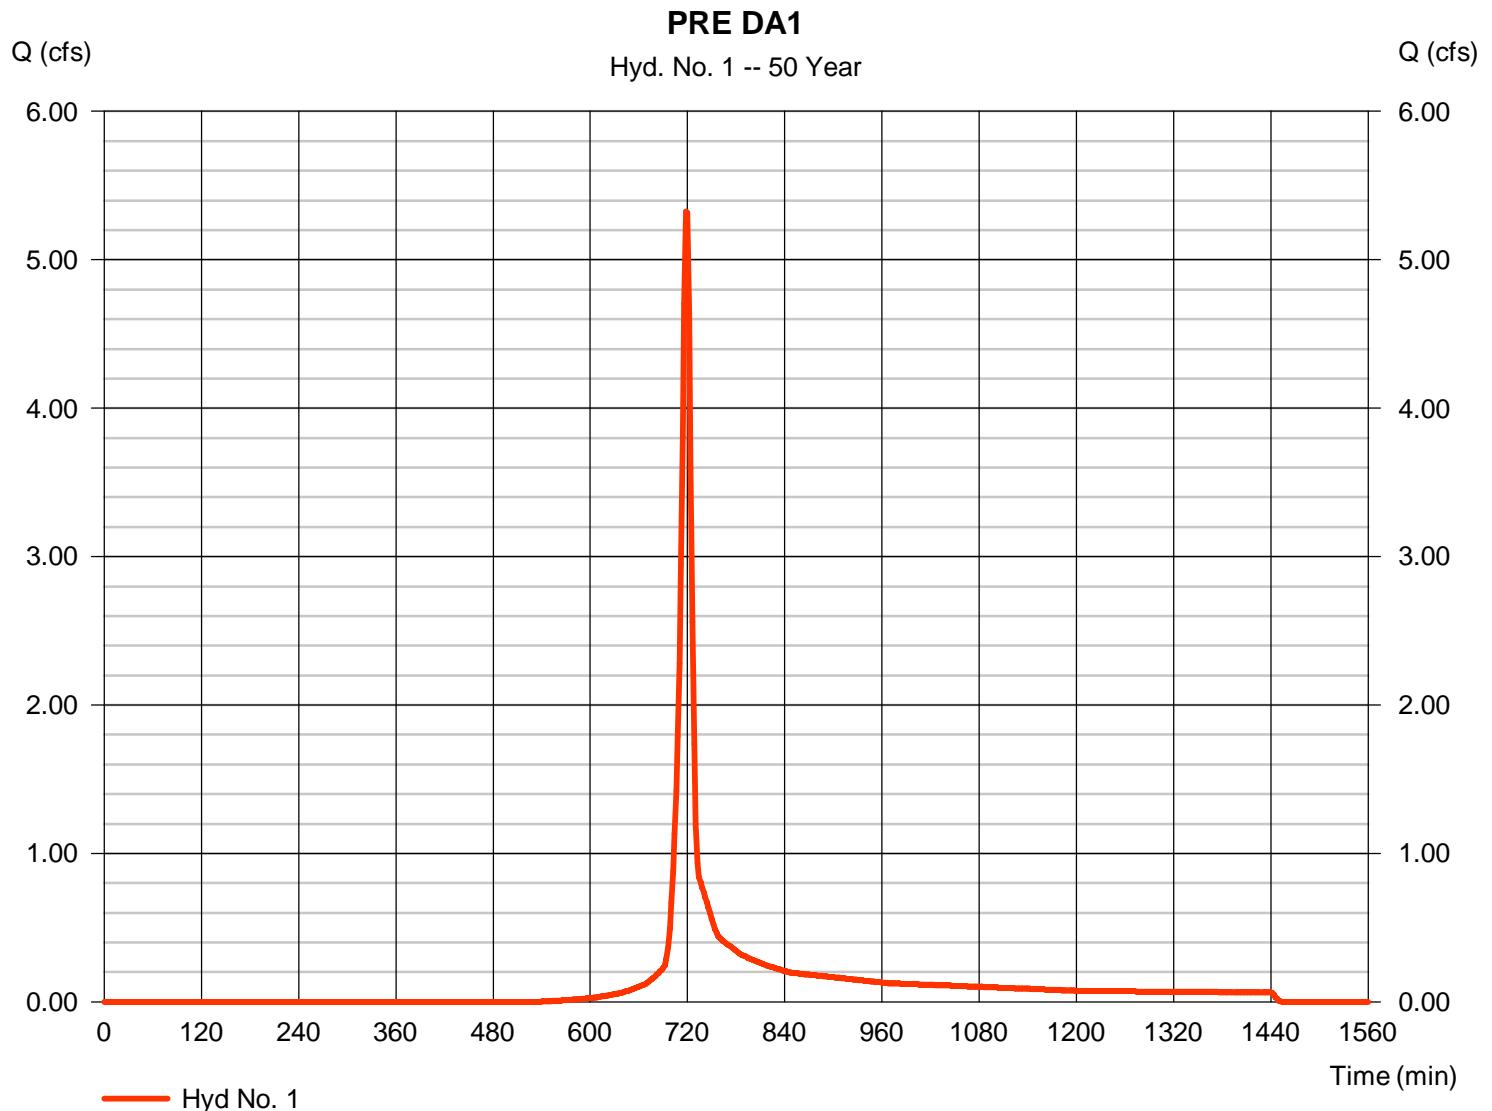

# Hydrograph Report

## Hyd. No. 2


### POST UNDETAINED DA1

Hydrograph type	= SCS Runoff	Peak discharge	= 4.033 cfs
Storm frequency	= 50 yrs	Time to peak	= 718 min
Time interval	= 2 min	Hyd. volume	= 9,236 cuft
Drainage area	= 1.030 ac	Curve number	= 73*
Basin Slope	= 0.0 %	Hydraulic length	= 0 ft
Tc method	= TR55	Time of conc. (Tc)	= 8.20 min
Total precip.	= 5.24 in	Distribution	= Type II
Storm duration	= 24 hrs	Shape factor	= 484

\* Composite (Area/CN) = [(0.100 x 58) + (0.320 x 71) + (0.160 x 78) + (0.050 x 70) + (0.400 x 77)] / 1.030

### POST UNDETAINED DA1

Hyd. No. 2 -- 50 Year

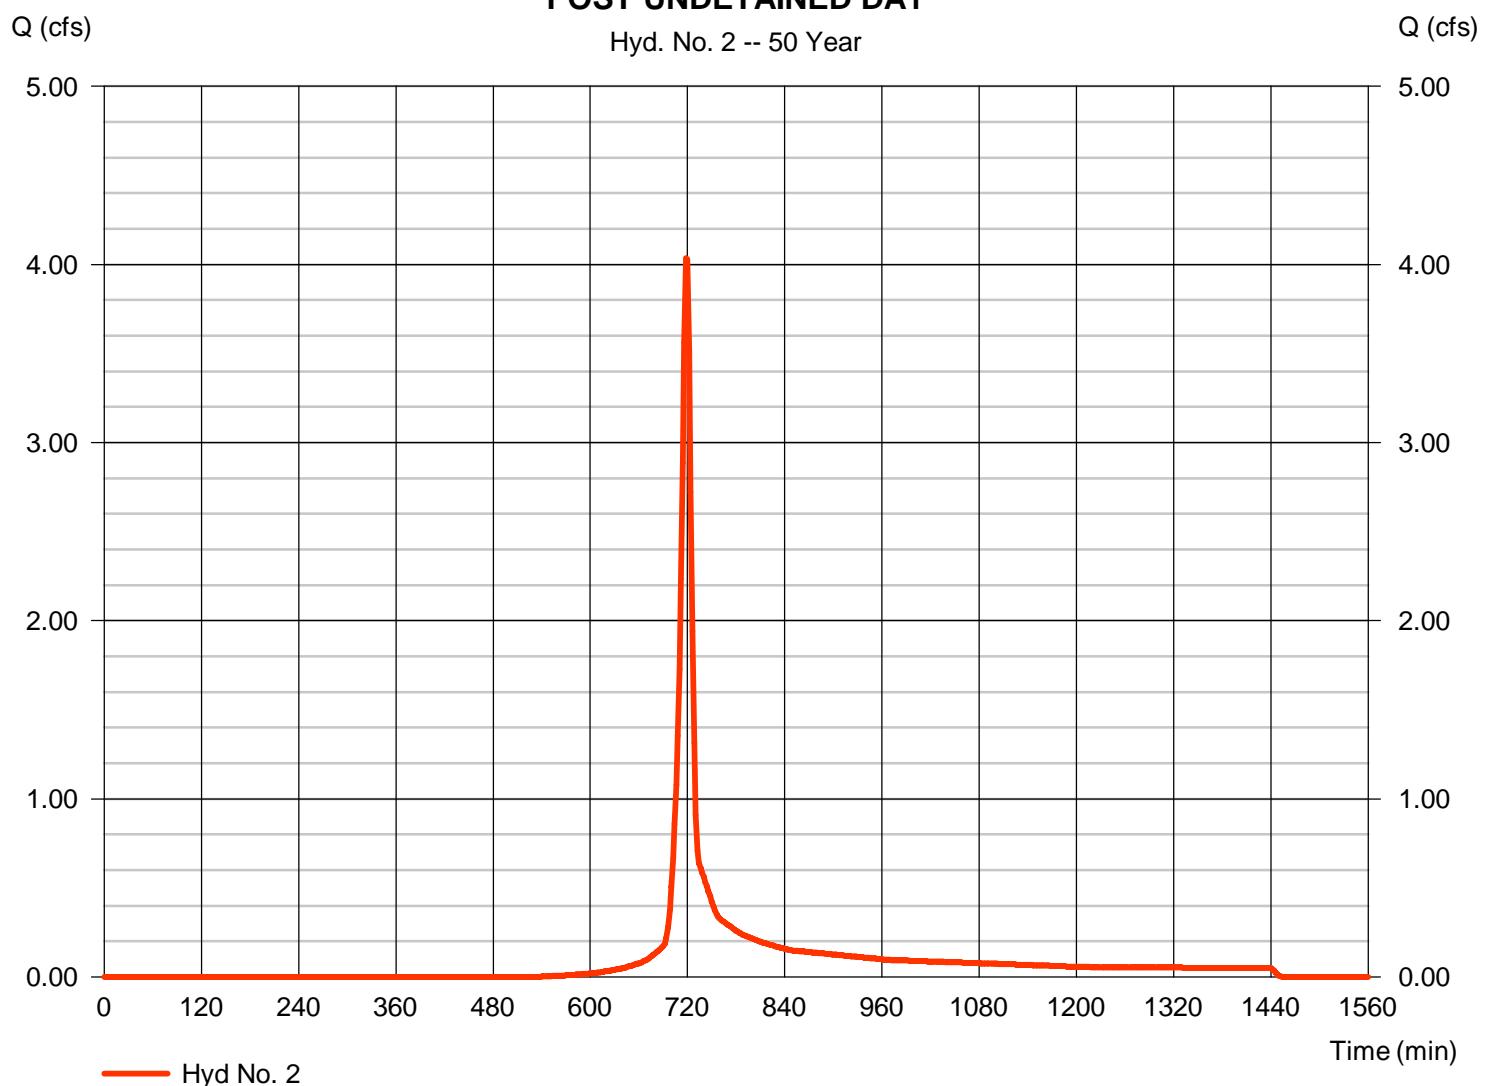

# Hydrograph Report

Hydraflow Hydrographs Extension for AutoCAD® Civil 3D® 2015 by Autodesk, Inc. v10.4

Sunday, 11 / 6 / 2016

## Hyd. No. 3


### POST DETAINED DA1

Hydrograph type	= SCS Runoff	Peak discharge	= 1.617 cfs
Storm frequency	= 50 yrs	Time to peak	= 718 min
Time interval	= 2 min	Hyd. volume	= 3,717 cuft
Drainage area	= 0.330 ac	Curve number	= 80*
Basin Slope	= 0.0 %	Hydraulic length	= 0 ft
Tc method	= TR55	Time of conc. (Tc)	= 7.20 min
Total precip.	= 5.24 in	Distribution	= Type II
Storm duration	= 24 hrs	Shape factor	= 484

\* Composite (Area/CN) = [(0.100 x 89) + (0.030 x 91) + (0.010 x 58) + (0.080 x 71) + (0.110 x 78)] / 0.330

### POST DETAINED DA1

Hyd. No. 3 -- 50 Year

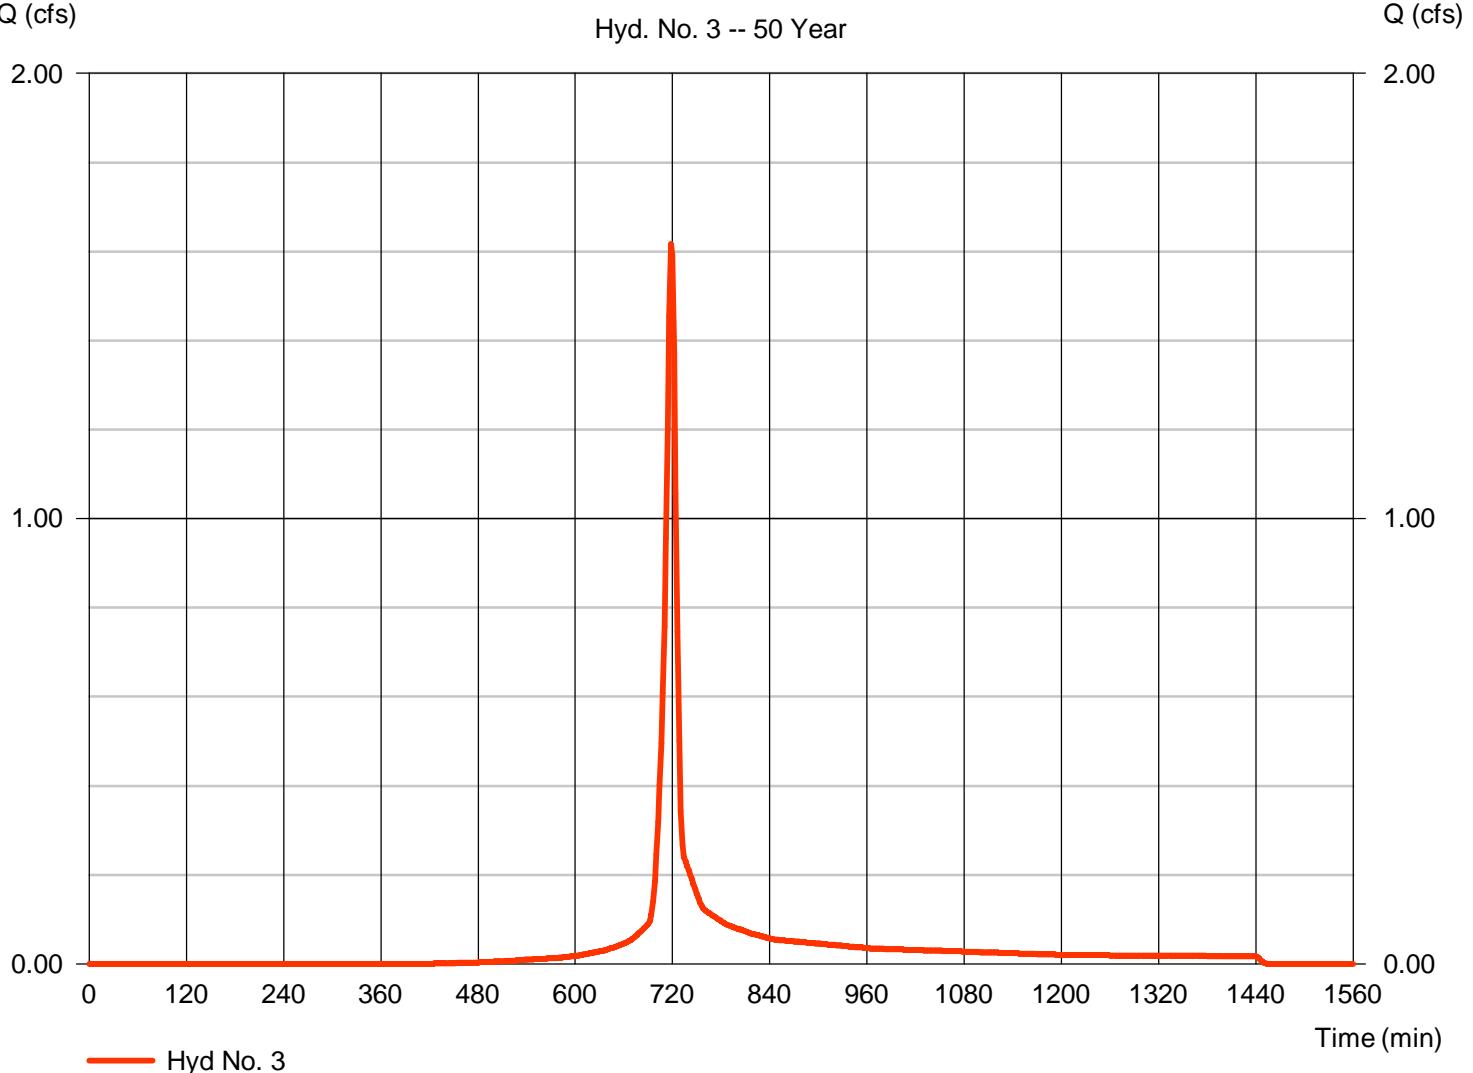

# Hydrograph Report


Hydraflow Hydrographs Extension for AutoCAD® Civil 3D® 2015 by Autodesk, Inc. v10.4

Sunday, 11 / 6 / 2016

## Hyd. No. 4

### VOLUME ABSTRACTION

Hydrograph type	= Diversion1	Peak discharge	= 1.203 cfs
Storm frequency	= 50 yrs	Time to peak	= 714 min
Time interval	= 2 min	Hyd. volume	= 965 cuft
Inflow hydrograph	= 3 - POST DETAINED DA1	2nd diverted hyd.	= 5
Diversion method	= First Flush Volume	Volume Up To	= 840.00 cuft

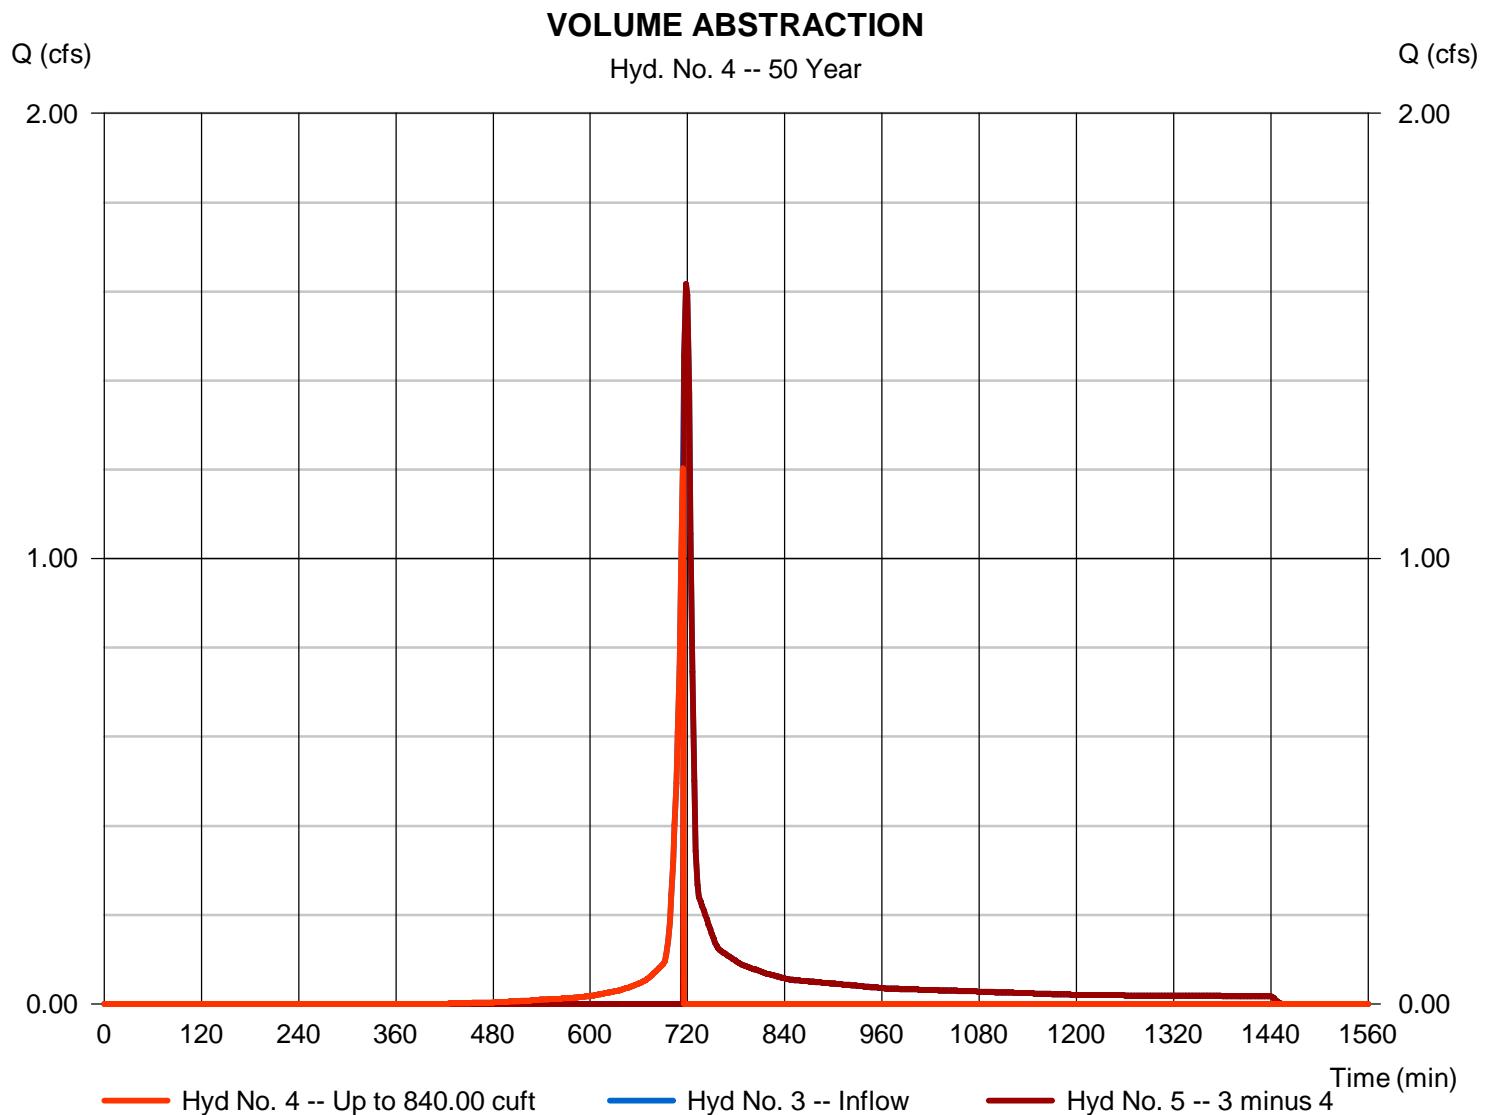

# Hydrograph Report


Hydraflow Hydrographs Extension for AutoCAD® Civil 3D® 2015 by Autodesk, Inc. v10.4

Sunday, 11 / 6 / 2016

## Hyd. No. 5

### POST AFTER BMP

Hydrograph type	= Diversion2	Peak discharge	= 1.617 cfs
Storm frequency	= 50 yrs	Time to peak	= 718 min
Time interval	= 2 min	Hyd. volume	= 2,753 cuft
Inflow hydrograph	= 3 - POST DETAINED DA1	2nd diverted hyd.	= 4
Diversion method	= First Flush Volume	Volume Up To	= 840.00 cuft

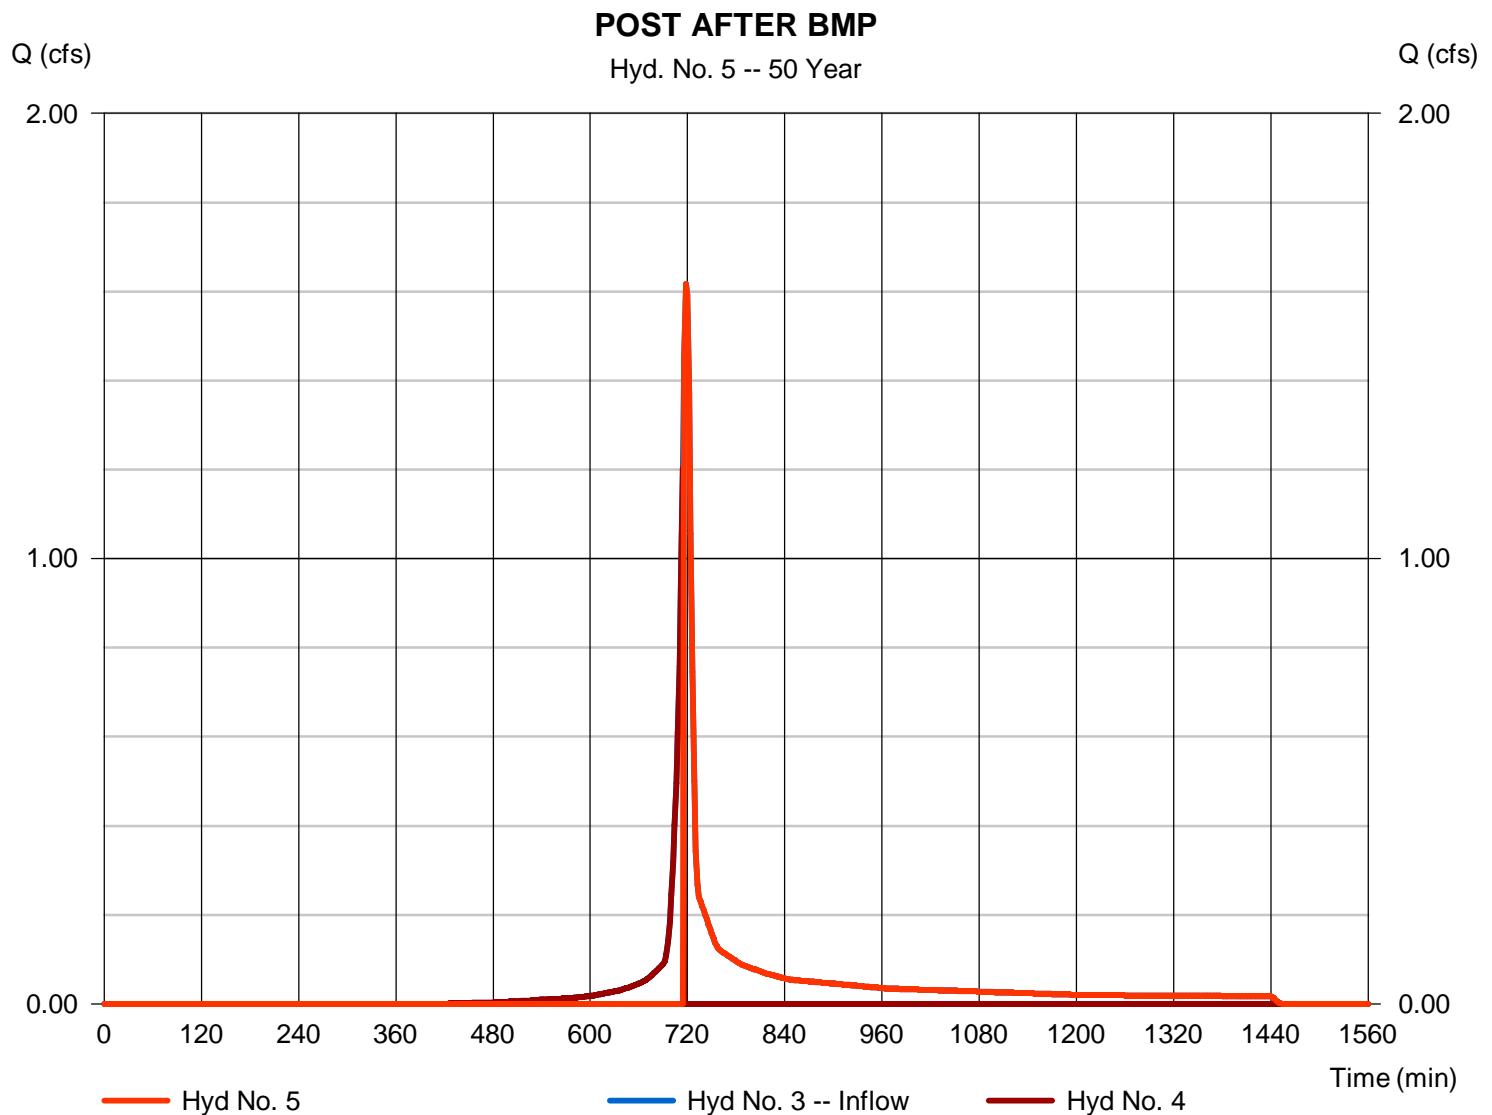

# Hydrograph Report


Hydraflow Hydrographs Extension for AutoCAD® Civil 3D® 2015 by Autodesk, Inc. v10.4

Sunday, 11 / 6 / 2016

## Hyd. No. 6

### POST AT POI DA1

Hydrograph type	= Combine	Peak discharge	= 5.650 cfs
Storm frequency	= 50 yrs	Time to peak	= 718 min
Time interval	= 2 min	Hyd. volume	= 11,988 cuft
Inflow hyds.	= 2, 5	Contrib. drain. area	= 1.030 ac

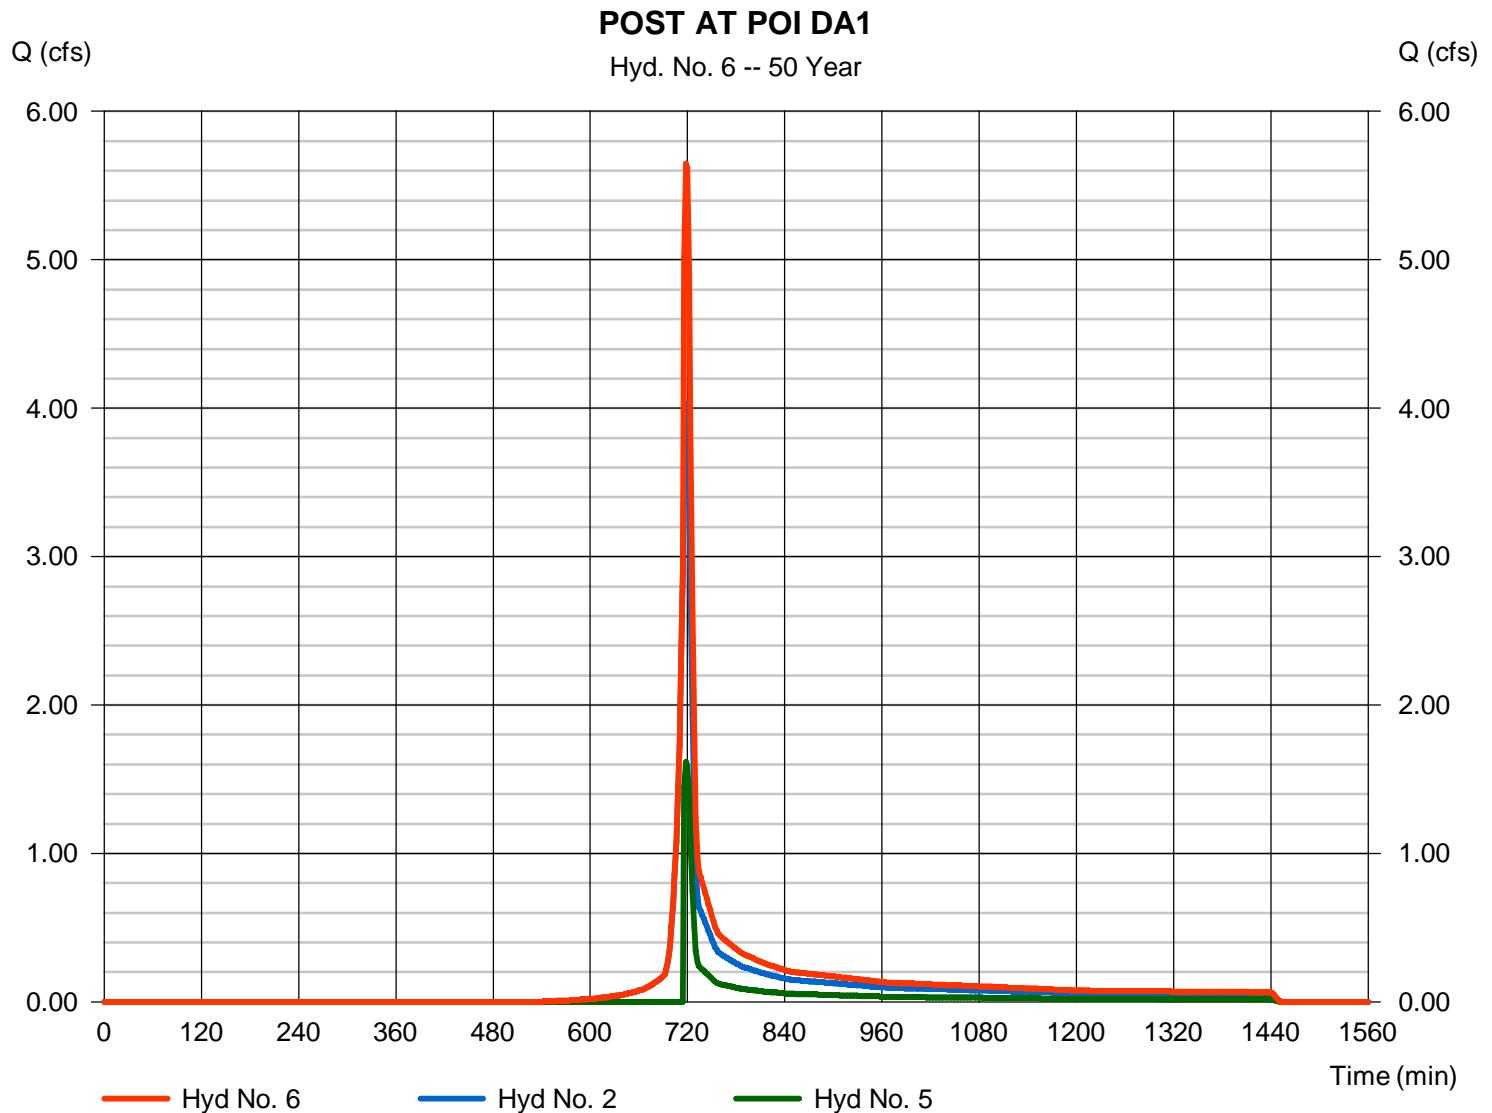

# Hydrograph Summary Report

Hydraflow Hydrographs Extension for AutoCAD® Civil 3D® 2015 by Autodesk, Inc. v10.4

Hyd. No.	Hydrograph type (origin)	Peak flow (cfs)	Time interval (min)	Time to Peak (min)	Hyd. volume (cuft)	Inflow hyd(s)	Maximum elevation (ft)	Total strge used (cuft)	Hydrograph Description
1	SCS Runoff	6.505	2	718	14,880	-----	-----	-----	PRE DA1
2	SCS Runoff	4.926	2	718	11,269	-----	-----	-----	POST UNDETAINED DA1
3	SCS Runoff	1.918	2	718	4,432	-----	-----	-----	POST DETAINED DA1
4	Diversion1	0.917	2	710	905	3	-----	-----	VOLUME ABSTRACTION
5	Diversion2	1.918	2	718	3,527	3	-----	-----	POST AFTER BMP
6	Combine	6.845	2	718	14,796	2, 5	-----	-----	POST AT POI DA1
Charger DA1.gpw				Return Period: 100 Year				Sunday, 11 / 6 / 2016	

# Hydrograph Report

Hydraflow Hydrographs Extension for AutoCAD® Civil 3D® 2015 by Autodesk, Inc. v10.4


Sunday, 11 / 6 / 2016

## Hyd. No. 1

PRE DA1

Hydrograph type	= SCS Runoff	Peak discharge	= 6.505 cfs
Storm frequency	= 100 yrs	Time to peak	= 718 min
Time interval	= 2 min	Hyd. volume	= 14,880 cuft
Drainage area	= 1.360 ac	Curve number	= 73*
Basin Slope	= 0.0 %	Hydraulic length	= 0 ft
Tc method	= TR55	Time of conc. (Tc)	= 8.20 min
Total precip.	= 5.91 in	Distribution	= Type II
Storm duration	= 24 hrs	Shape factor	= 484

\* Composite (Area/CN) = [(0.100 x 58) + (0.150 x 71) + (0.040 x 78) + (0.010 x 55) + (0.390 x 70) + (0.670 x 77)] / 1.360

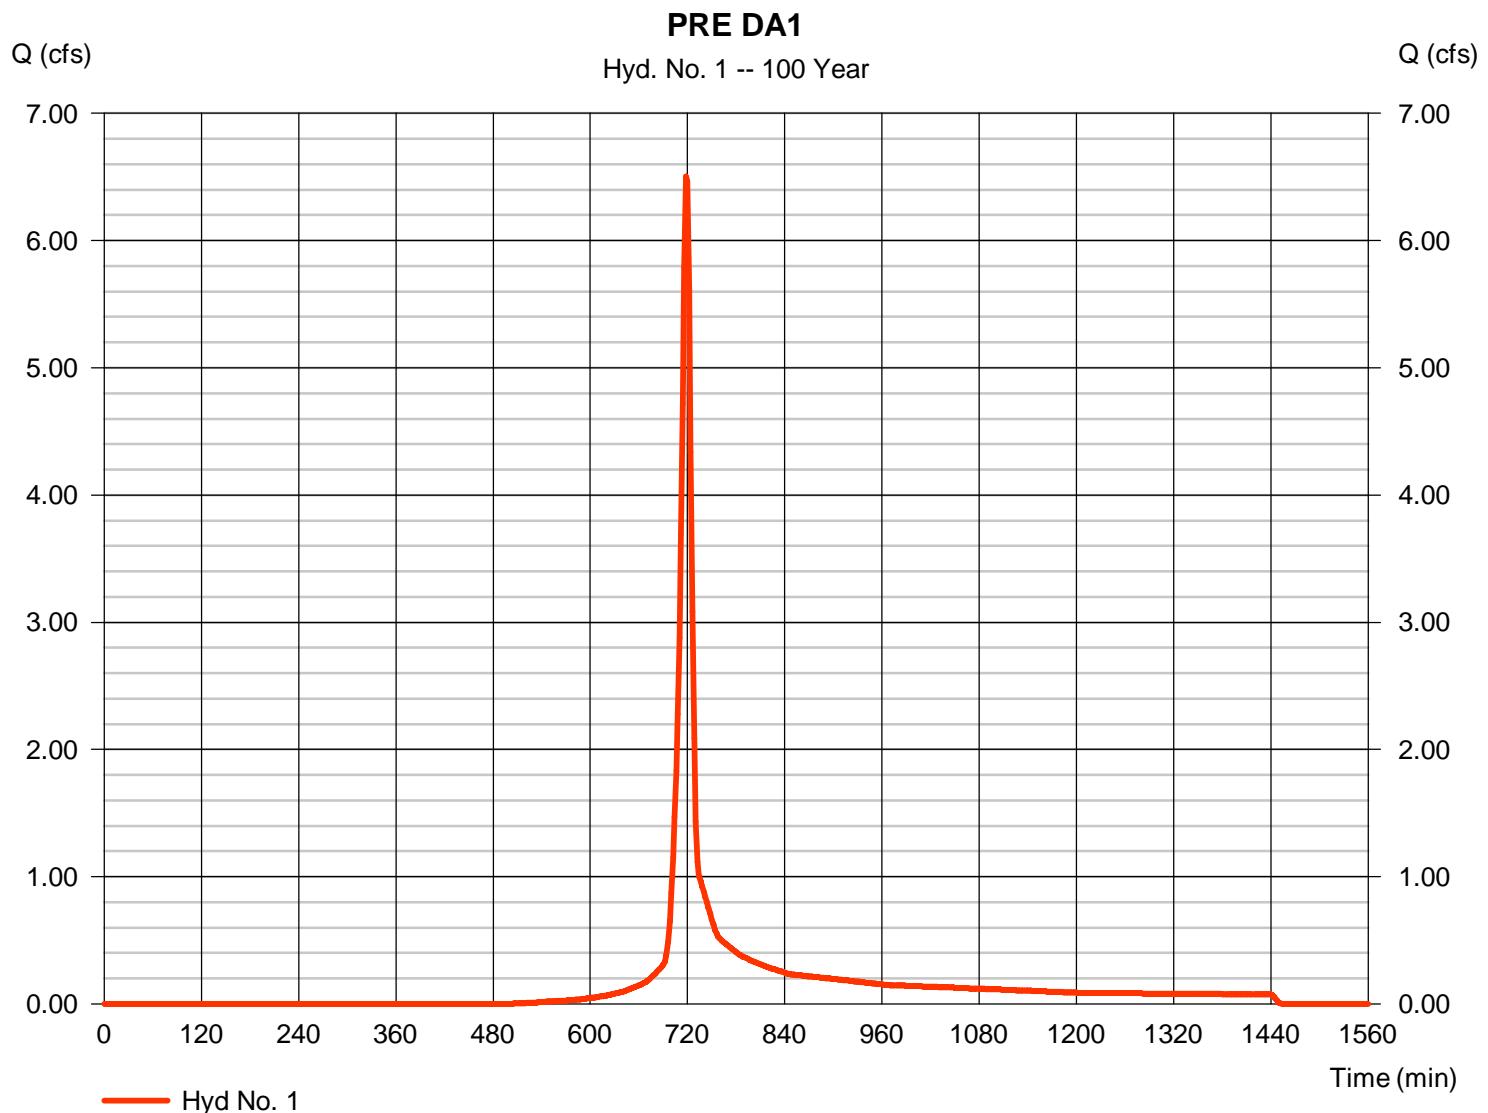

# Hydrograph Report

## Hyd. No. 2


### POST UNDETAINED DA1

Hydrograph type	= SCS Runoff	Peak discharge	= 4.926 cfs
Storm frequency	= 100 yrs	Time to peak	= 718 min
Time interval	= 2 min	Hyd. volume	= 11,269 cuft
Drainage area	= 1.030 ac	Curve number	= 73*
Basin Slope	= 0.0 %	Hydraulic length	= 0 ft
Tc method	= TR55	Time of conc. (Tc)	= 8.20 min
Total precip.	= 5.91 in	Distribution	= Type II
Storm duration	= 24 hrs	Shape factor	= 484

\* Composite (Area/CN) = [(0.100 x 58) + (0.320 x 71) + (0.160 x 78) + (0.050 x 70) + (0.400 x 77)] / 1.030

### POST UNDETAINED DA1

Hyd. No. 2 -- 100 Year

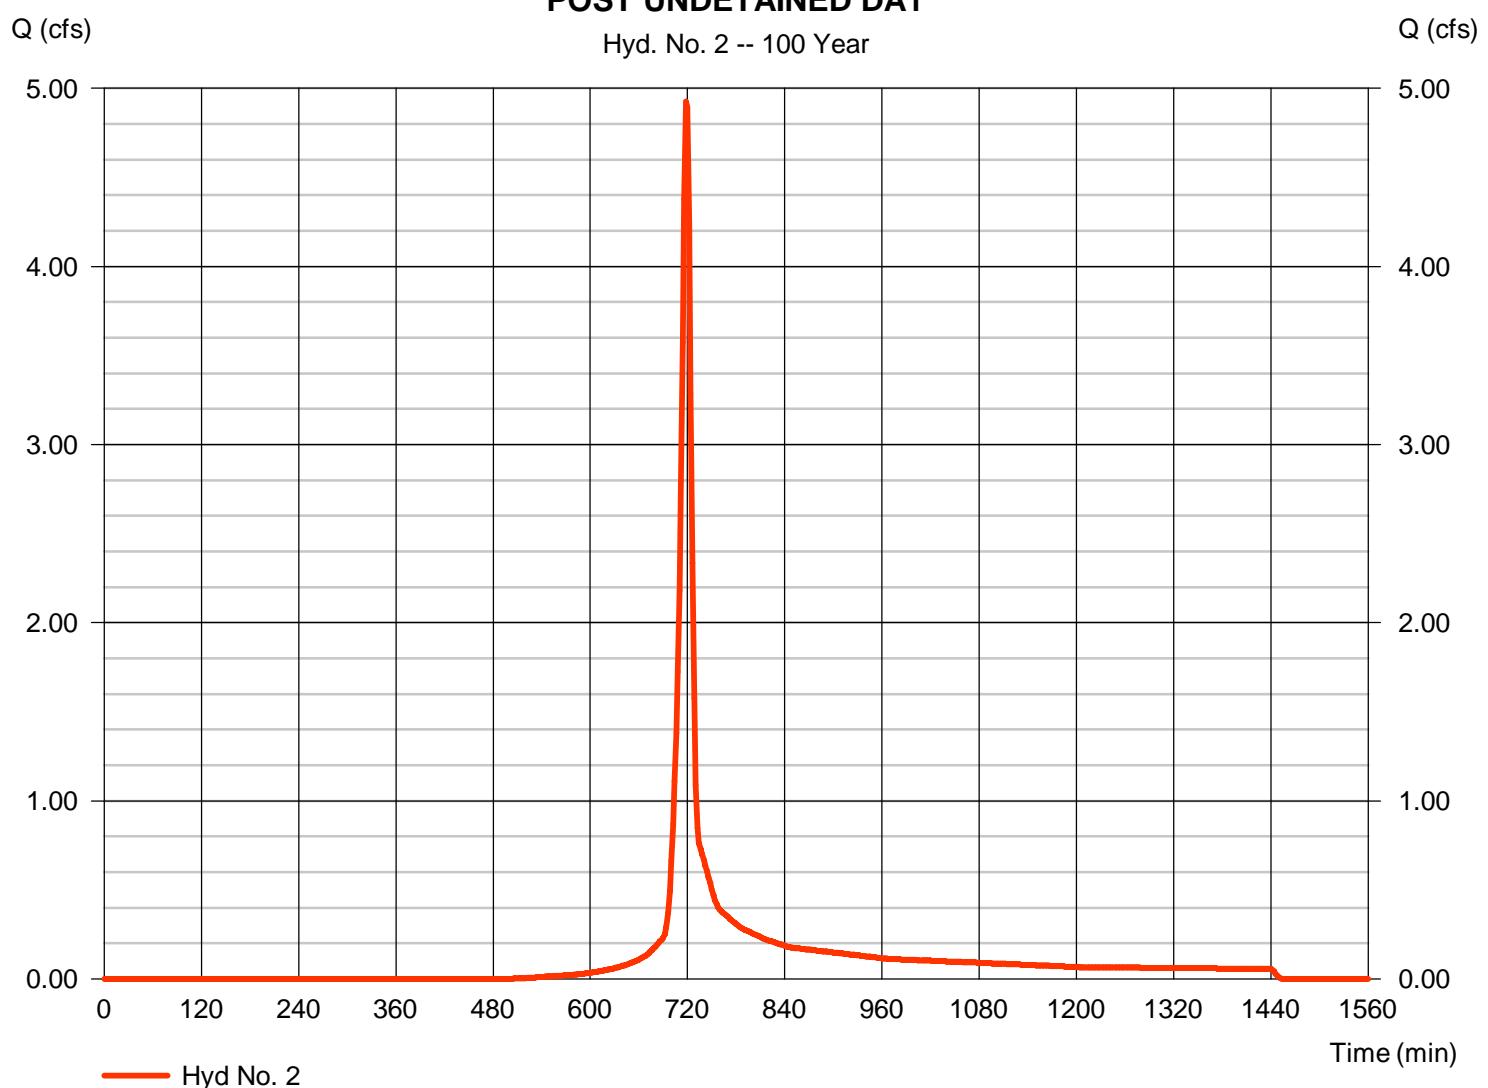

# Hydrograph Report

Hydraflow Hydrographs Extension for AutoCAD® Civil 3D® 2015 by Autodesk, Inc. v10.4


Sunday, 11 / 6 / 2016

## Hyd. No. 3

### POST DETAINED DA1

Hydrograph type	= SCS Runoff	Peak discharge	= 1.918 cfs
Storm frequency	= 100 yrs	Time to peak	= 718 min
Time interval	= 2 min	Hyd. volume	= 4,432 cuft
Drainage area	= 0.330 ac	Curve number	= 80*
Basin Slope	= 0.0 %	Hydraulic length	= 0 ft
Tc method	= TR55	Time of conc. (Tc)	= 7.20 min
Total precip.	= 5.91 in	Distribution	= Type II
Storm duration	= 24 hrs	Shape factor	= 484

\* Composite (Area/CN) = [(0.100 x 89) + (0.030 x 91) + (0.010 x 58) + (0.080 x 71) + (0.110 x 78)] / 0.330

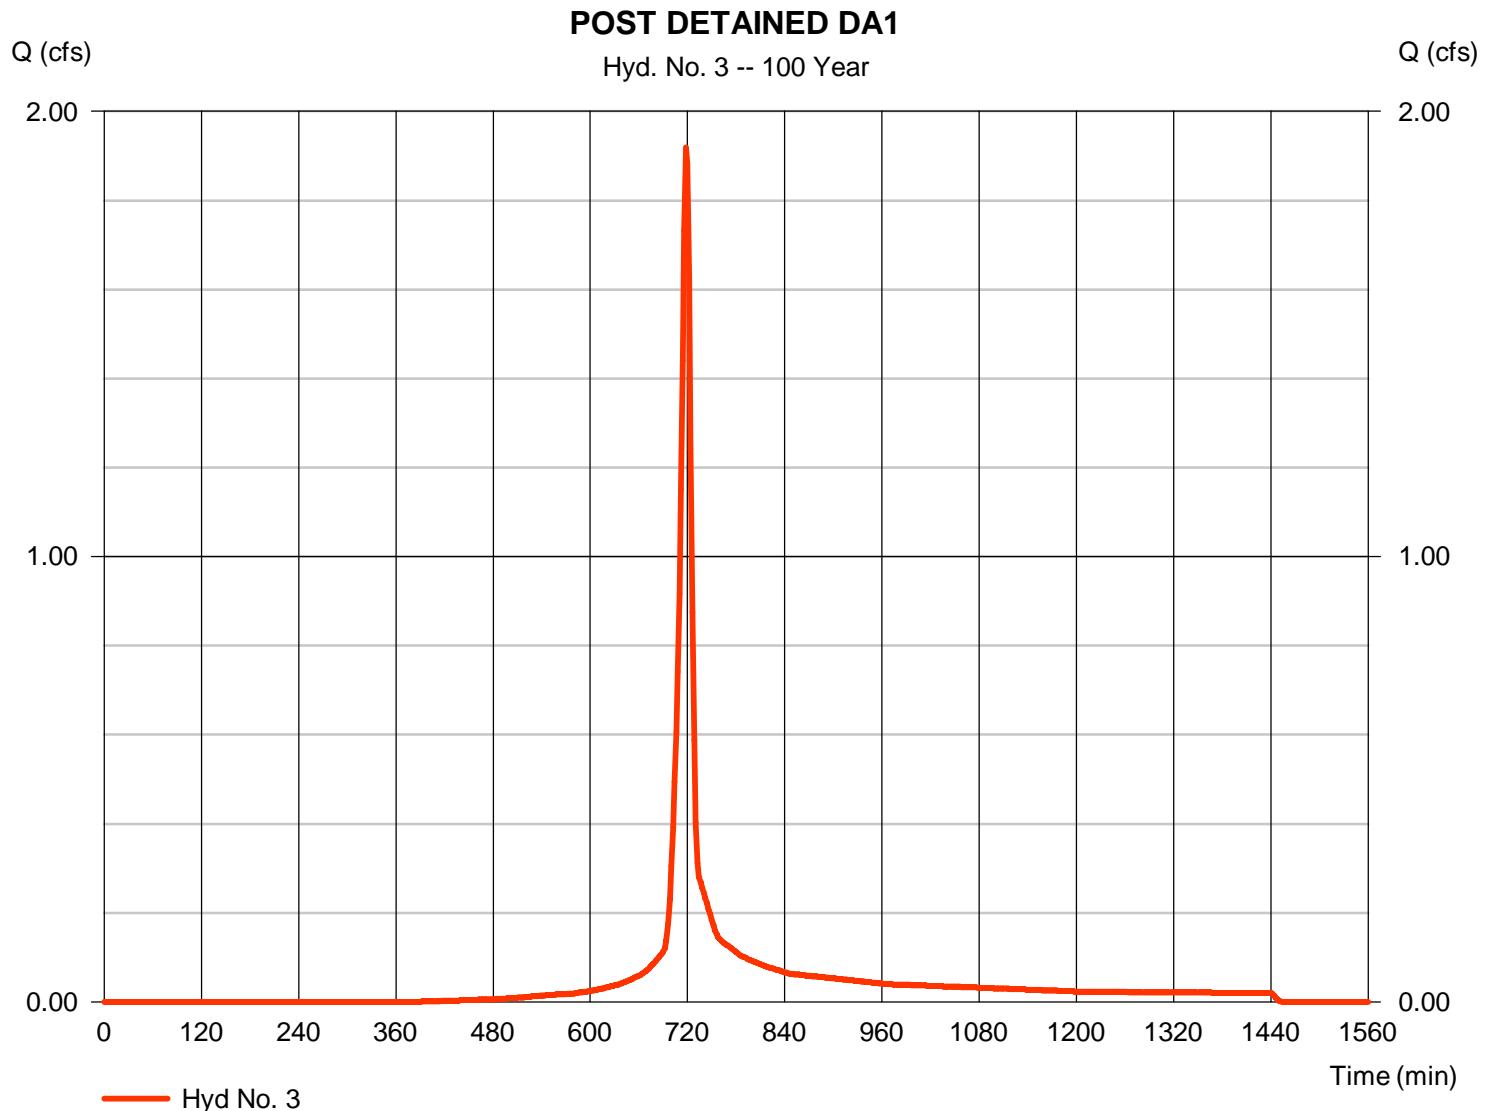

# Hydrograph Report


Hydraflow Hydrographs Extension for AutoCAD® Civil 3D® 2015 by Autodesk, Inc. v10.4

Sunday, 11 / 6 / 2016

## Hyd. No. 4

### VOLUME ABSTRACTION

Hydrograph type	= Diversion1	Peak discharge	= 0.917 cfs
Storm frequency	= 100 yrs	Time to peak	= 710 min
Time interval	= 2 min	Hyd. volume	= 905 cuft
Inflow hydrograph	= 3 - POST DETAINED DA1	2nd diverted hyd.	= 5
Diversion method	= First Flush Volume	Volume Up To	= 840.00 cuft

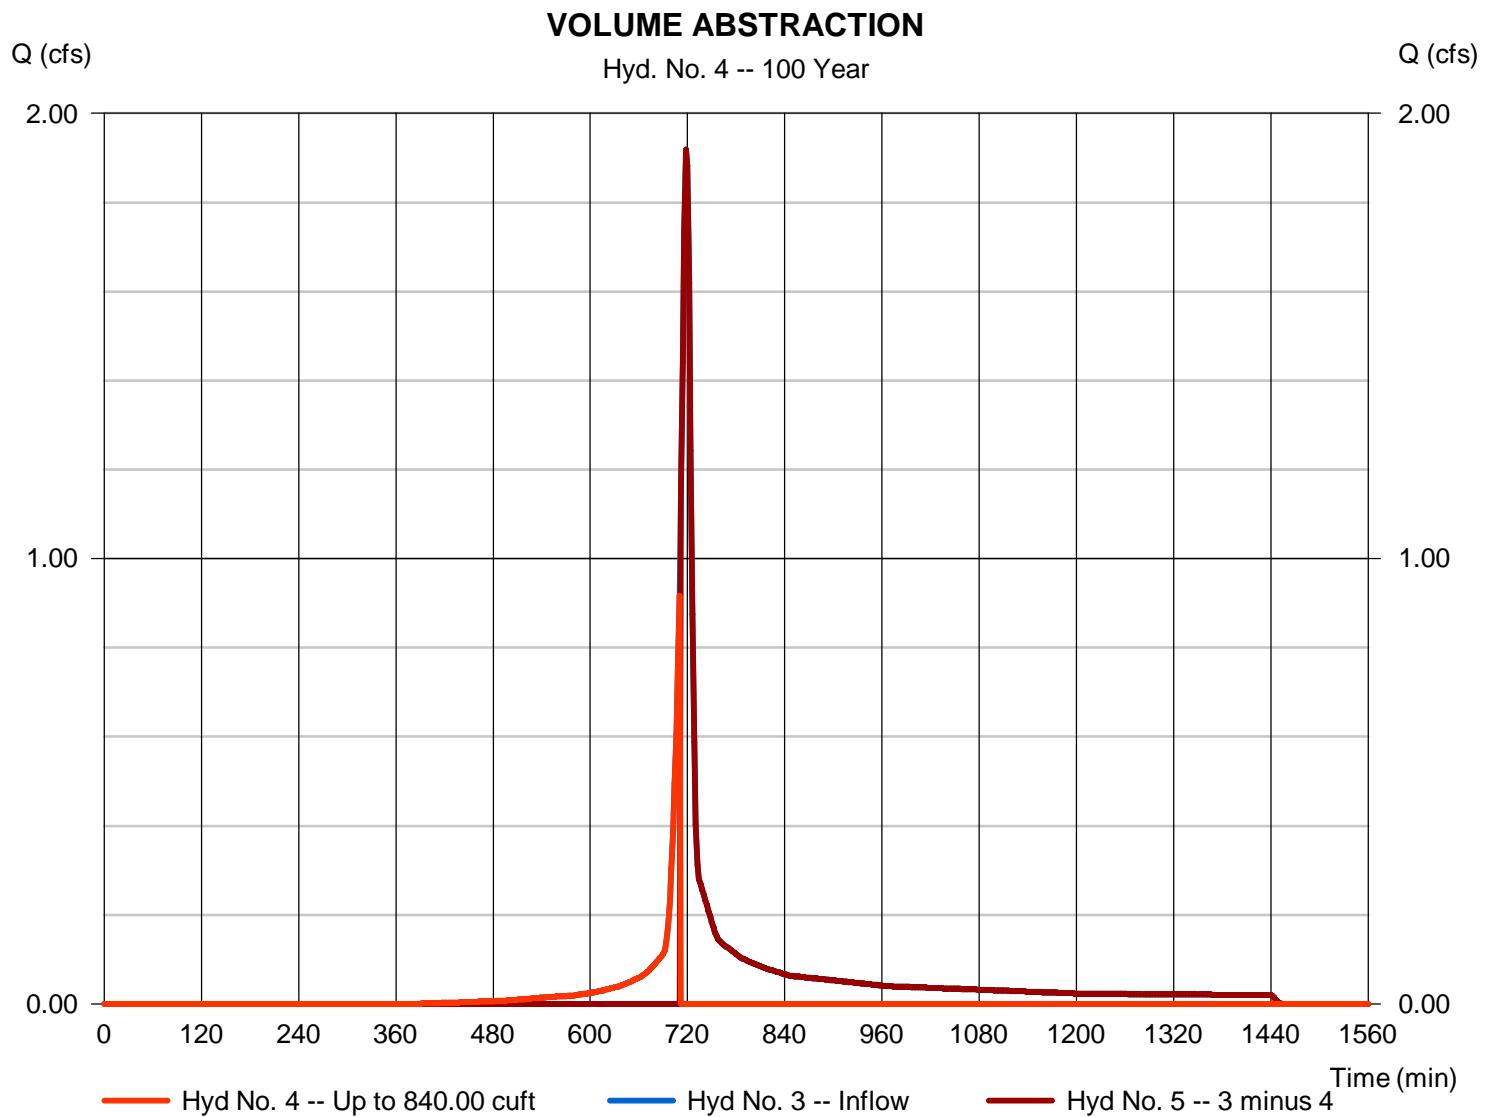

# Hydrograph Report


Hydraflow Hydrographs Extension for AutoCAD® Civil 3D® 2015 by Autodesk, Inc. v10.4

Sunday, 11 / 6 / 2016

## Hyd. No. 5

### POST AFTER BMP

Hydrograph type	= Diversion2	Peak discharge	= 1.918 cfs
Storm frequency	= 100 yrs	Time to peak	= 718 min
Time interval	= 2 min	Hyd. volume	= 3,527 cuft
Inflow hydrograph	= 3 - POST DETAINED DA1	2nd diverted hyd.	= 4
Diversion method	= First Flush Volume	Volume Up To	= 840.00 cuft

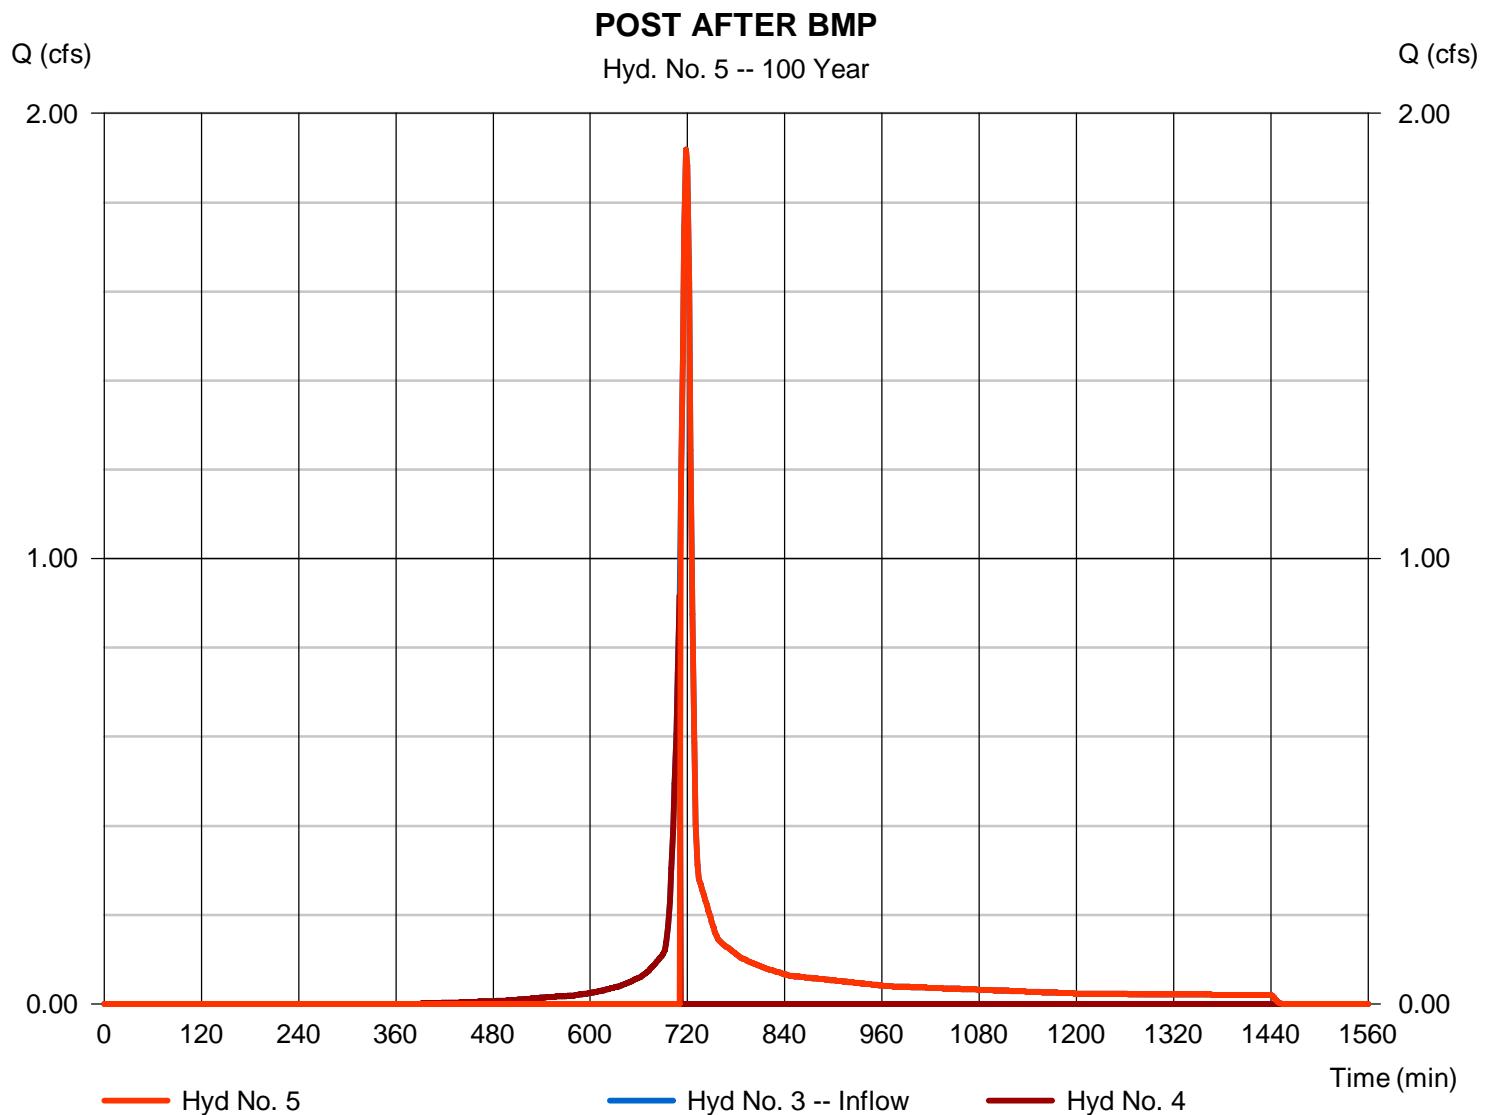

# Hydrograph Report


Hydraflow Hydrographs Extension for AutoCAD® Civil 3D® 2015 by Autodesk, Inc. v10.4

Sunday, 11 / 6 / 2016

## Hyd. No. 6

### POST AT POI DA1

Hydrograph type	= Combine	Peak discharge	= 6.845 cfs
Storm frequency	= 100 yrs	Time to peak	= 718 min
Time interval	= 2 min	Hyd. volume	= 14,796 cuft
Inflow hyds.	= 2, 5	Contrib. drain. area	= 1.030 ac

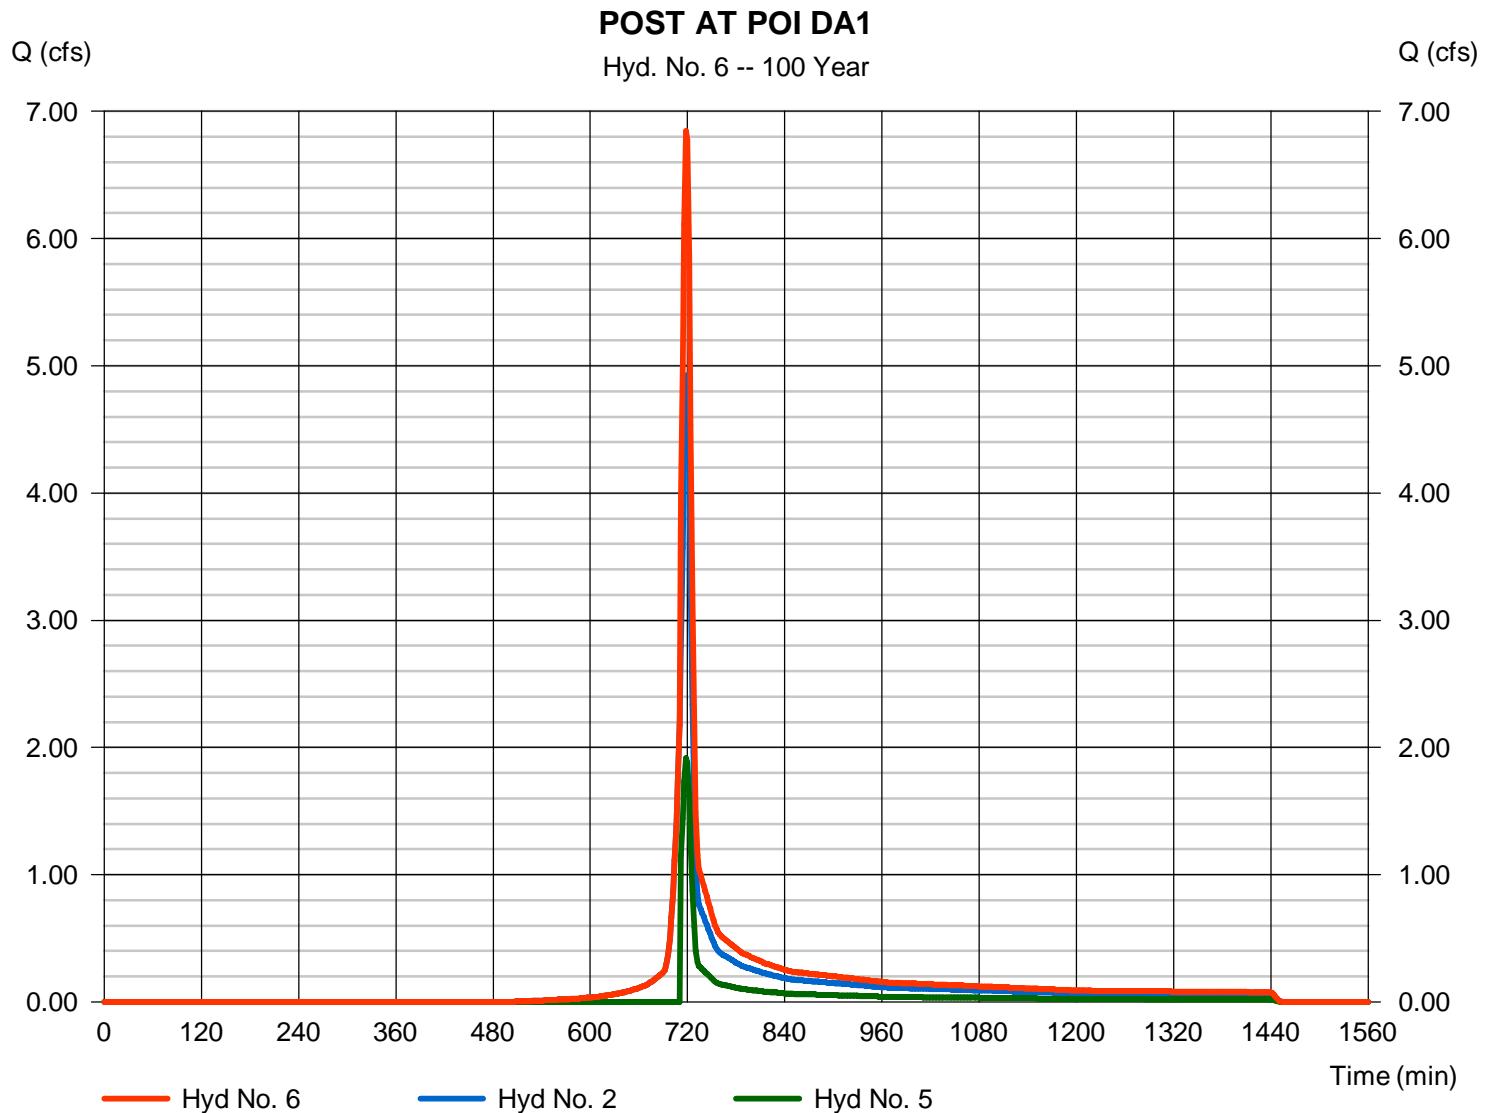

# Hydraflow Rainfall Report

Return Period (Yrs)	Intensity-Duration-Frequency Equation Coefficients (FHA)			
	B	D	E	(N/A)
1	39.9938	10.0000	0.8826	-----
2	46.8600	10.1000	0.8723	-----
3	0.0000	0.0000	0.0000	-----
5	47.4204	9.3000	0.8196	-----
10	26589.4199	47.3998	2.1160	-----
25	53942.1797	51.5998	2.2139	-----
50	69308.7266	52.6998	2.2395	-----
100	106327.6016	55.1997	2.2977	-----

File name: Charger IDF.IDF

$$\text{Intensity} = B / (T_c + D)^E$$


Return Period (Yrs)	Intensity Values (in/hr)											
	5 min	10	15	20	25	30	35	40	45	50	55	60
1	3.66	2.84	2.33	1.99	1.73	1.54	1.39	1.27	1.16	1.08	1.00	0.94
2	4.39	3.42	2.82	2.40	2.10	1.87	1.69	1.54	1.42	1.32	1.23	1.15
3	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
5	5.36	4.19	3.47	2.98	2.62	2.34	2.12	1.94	1.80	1.67	1.56	1.47
10	6.12	5.04	4.23	3.59	3.09	2.68	2.35	2.07	1.84	1.65	1.48	1.34
25	7.10	5.89	4.95	4.22	3.63	3.16	2.77	2.45	2.17	1.94	1.75	1.58
50	7.88	6.54	5.51	4.70	4.05	3.52	3.09	2.73	2.42	2.17	1.95	1.76
100	8.66	7.21	6.09	5.20	4.48	3.90	3.42	3.02	2.69	2.40	2.16	1.95

Tc = time in minutes. Values may exceed 60.

hase 2)\ESCGP-2\PPP\02 SCRO\07 PCSM\Attach 4 Stormwater Calcs\Charger\Hydraflow Rev 1\Charger Precip.pc

# Watershed Model Schematic

Hydraflow Hydrographs Extension for AutoCAD® Civil 3D® 2015 by Autodesk, Inc. v10.4

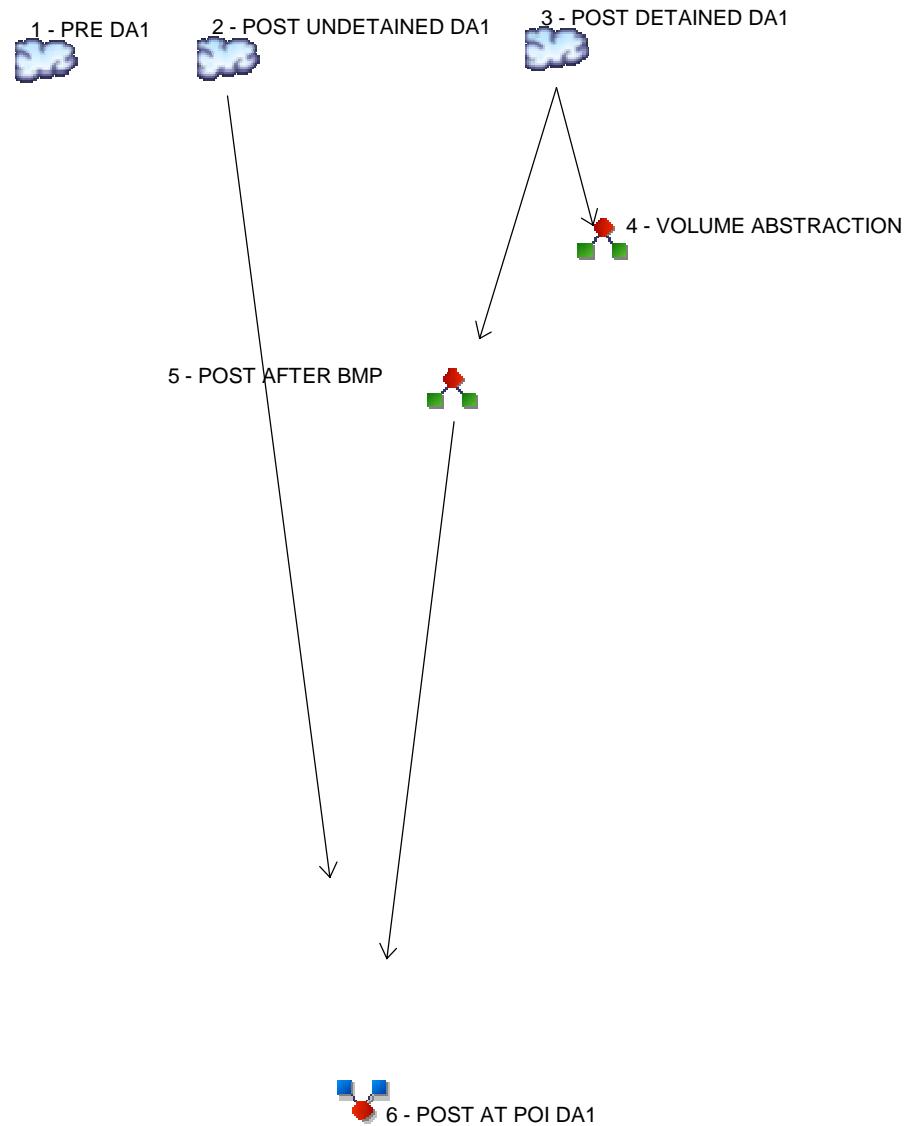

## Legend

### Hyd. Origin      Description

1	SCS Runoff	PRE DA1
2	SCS Runoff	POST UNDETAINED DA1
3	SCS Runoff	POST DETAINED DA1
4	Diversion1	VOLUME ABSTRACTION
5	Diversion2	POST AFTER BMP
6	Combine	POST AT POI DA1

# Hydrograph Return Period Recap

Hydraflow Hydrographs Extension for AutoCAD® Civil 3D® 2015 by Autodesk, Inc. v10.4

Hyd. No.	Hydrograph type (origin)	Inflow hyd(s)	Peak Outflow (cfs)								Hydrograph Description
			1-yr	2-yr	3-yr	5-yr	10-yr	25-yr	50-yr	100-yr	
1	SCS Runoff	----	-----	1.348	-----	-----	-----	-----	-----	-----	PRE DA1
2	SCS Runoff	----	-----	1.021	-----	-----	-----	-----	-----	-----	POST UNDETAINED DA1
3	SCS Runoff	----	-----	0.270	-----	-----	-----	-----	-----	-----	POST DETAINED DA1
4	Diversion1	3	-----	0.270	-----	-----	-----	-----	-----	-----	VOLUME ABSTRACTION
5	Diversion2	3	-----	0.020	-----	-----	-----	-----	-----	-----	POST AFTER BMP
6	Combine	2, 5	-----	1.021	-----	-----	-----	-----	-----	-----	POST AT POI DA1

# Hydrograph Summary Report

Hydraflow Hydrographs Extension for AutoCAD® Civil 3D® 2015 by Autodesk, Inc. v10.4

Hyd. No.	Hydrograph type (origin)	Peak flow (cfs)	Time interval (min)	Time to Peak (min)	Hyd. volume (cuft)	Inflow hyd(s)	Maximum elevation (ft)	Total strge used (cuft)	Hydrograph Description
1	SCS Runoff	1.348	2	720	3,240	-----	-----	-----	PRE DA1
2	SCS Runoff	1.021	2	720	2,454	-----	-----	-----	POST UNDETAINED DA1
3	SCS Runoff	0.270	2	734	1,214	-----	-----	-----	POST DETAINED DA1
4	Diversion1	0.270	2	734	841	3	-----	-----	VOLUME ABSTRACTION
5	Diversion2	0.020	2	882	373	3	-----	-----	POST AFTER BMP
6	Combine	1.021	2	720	2,827	2, 5	-----	-----	POST AT POI DA1

# Hydrograph Report

Hydraflow Hydrographs Extension for AutoCAD® Civil 3D® 2015 by Autodesk, Inc. v10.4


Sunday, 11 / 6 / 2016

## Hyd. No. 1

PRE DA1

Hydrograph type	= SCS Runoff	Peak discharge	= 1.348 cfs
Storm frequency	= 2 yrs	Time to peak	= 12.00 hrs
Time interval	= 2 min	Hyd. volume	= 3,240 cuft
Drainage area	= 1.360 ac	Curve number	= 73*
Basin Slope	= 0.0 %	Hydraulic length	= 0 ft
Tc method	= TR55	Time of conc. (Tc)	= 8.20 min
Total precip.	= 2.66 in	Distribution	= Type II
Storm duration	= 24 hrs	Shape factor	= 484

\* Composite (Area/CN) = [(0.100 x 58) + (0.150 x 71) + (0.040 x 78) + (0.010 x 55) + (0.390 x 70) + (0.670 x 77)] / 1.360

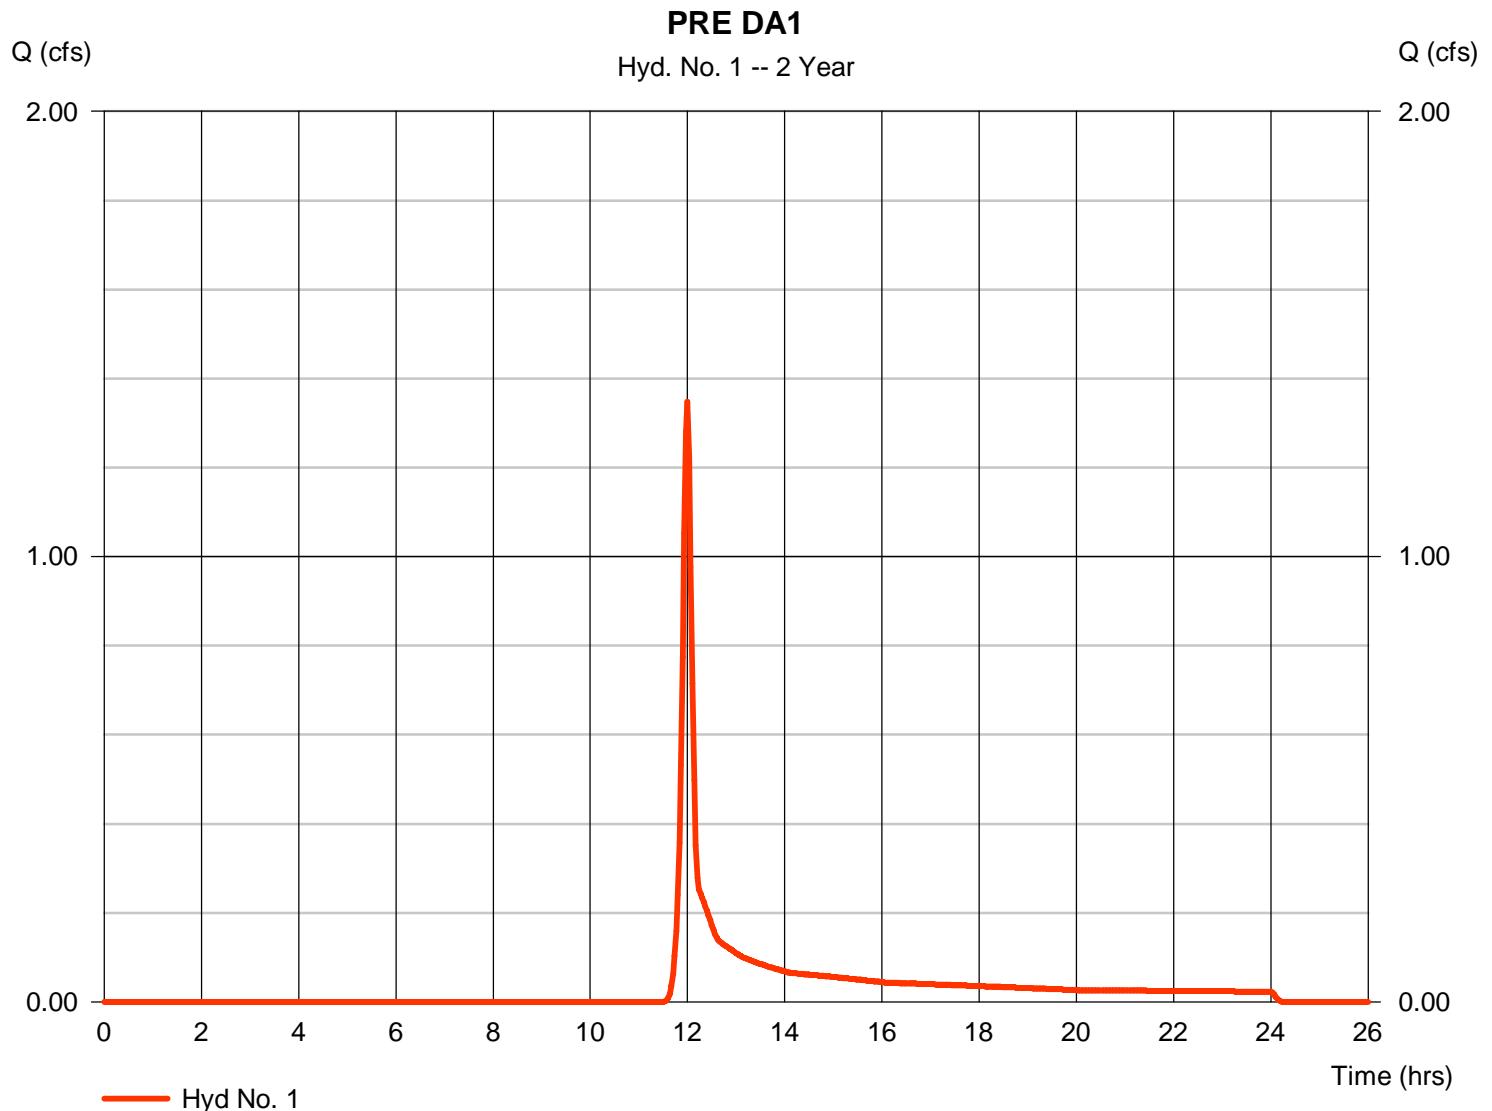

# TR55 Tc Worksheet

Hydraflow Hydrographs Extension for AutoCAD® Civil 3D® 2015 by Autodesk, Inc. v10.4

## Hyd. No. 1

PRE DA1

<u>Description</u>	<u>A</u>	<u>B</u>	<u>C</u>	<u>Totals</u>	
<b>Sheet Flow</b>					
Manning's n-value	= 0.240	0.011	0.011		
Flow length (ft)	= 50.0	0.0	0.0		
Two-year 24-hr precip. (in)	= 2.66	0.00	0.00		
Land slope (%)	= 3.00	0.00	0.00		
<b>Travel Time (min)</b>	<b>= 7.64</b>	<b>+ 0.00</b>	<b>+ 0.00</b>	<b>=</b>	<b>7.64</b>
<b>Shallow Concentrated Flow</b>					
Flow length (ft)	= 209.00	0.00	0.00		
Watercourse slope (%)	= 14.80	0.00	0.00		
Surface description	= Unpaved	Paved	Paved		
Average velocity (ft/s)	= 6.21	0.00	0.00		
<b>Travel Time (min)</b>	<b>= 0.56</b>	<b>+ 0.00</b>	<b>+ 0.00</b>	<b>=</b>	<b>0.56</b>
<b>Channel Flow</b>					
X sectional flow area (sqft)	= 0.00	0.00	0.00		
Wetted perimeter (ft)	= 0.00	0.00	0.00		
Channel slope (%)	= 0.00	0.00	0.00		
Manning's n-value	= 0.035	0.015	0.015		
Velocity (ft/s)	= 0.00	0.00	0.00		
Flow length (ft)	({0}) 0.0	0.0	0.0		
<b>Travel Time (min)</b>	<b>= 0.00</b>	<b>+ 0.00</b>	<b>+ 0.00</b>	<b>=</b>	<b>0.00</b>
<b>Total Travel Time, Tc .....</b>					<b>8.20 min</b>

# Hydrograph Report

Hydraflow Hydrographs Extension for AutoCAD® Civil 3D® 2015 by Autodesk, Inc. v10.4

Sunday, 11 / 6 / 2016

## Hyd. No. 2


### POST UNDETAINED DA1

Hydrograph type	= SCS Runoff	Peak discharge	= 1.021 cfs
Storm frequency	= 2 yrs	Time to peak	= 12.00 hrs
Time interval	= 2 min	Hyd. volume	= 2,454 cuft
Drainage area	= 1.030 ac	Curve number	= 73*
Basin Slope	= 0.0 %	Hydraulic length	= 0 ft
Tc method	= TR55	Time of conc. (Tc)	= 8.20 min
Total precip.	= 2.66 in	Distribution	= Type II
Storm duration	= 24 hrs	Shape factor	= 484

\* Composite (Area/CN) = [(0.100 x 58) + (0.320 x 71) + (0.160 x 78) + (0.050 x 70) + (0.400 x 77)] / 1.030

### POST UNDETAINED DA1

Hyd. No. 2 -- 2 Year

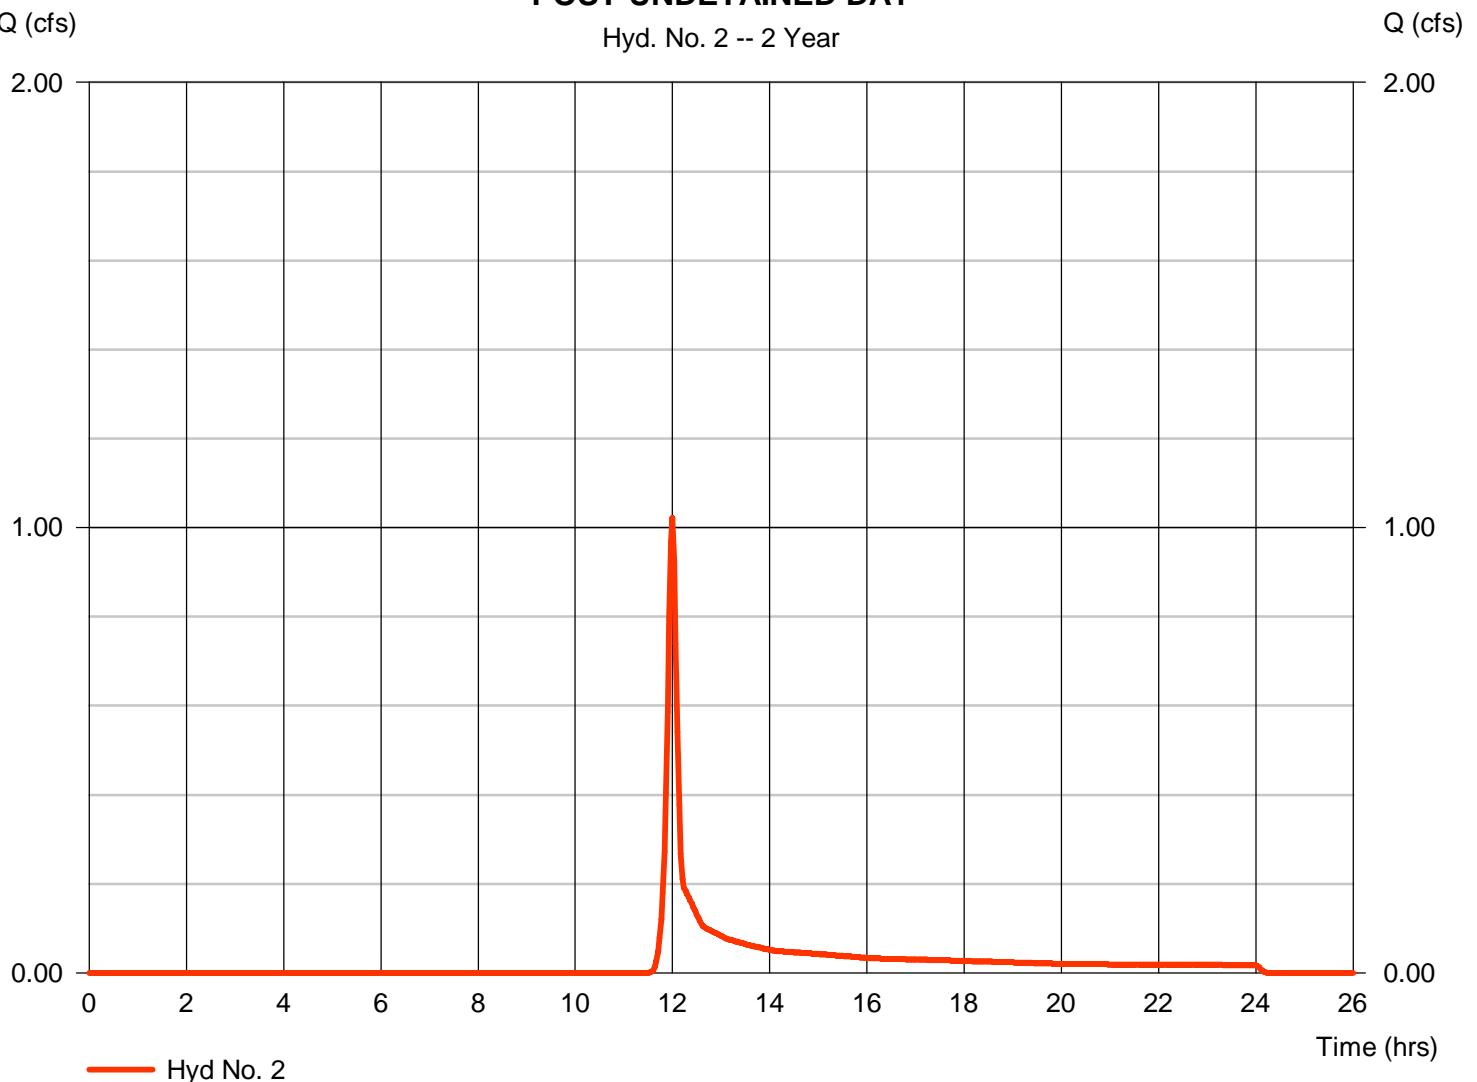

# TR55 Tc Worksheet

Hydraflow Hydrographs Extension for AutoCAD® Civil 3D® 2015 by Autodesk, Inc. v10.4

## Hyd. No. 2

POST UNDETAINED DA1

<u>Description</u>	<u>A</u>	<u>B</u>	<u>C</u>	<u>Totals</u>	
<b>Sheet Flow</b>					
Manning's n-value	= 0.240	0.011	0.011		
Flow length (ft)	= 50.0	0.0	0.0		
Two-year 24-hr precip. (in)	= 2.66	0.00	0.00		
Land slope (%)	= 3.00	0.00	0.00		
<b>Travel Time (min)</b>	<b>= 7.64</b>	<b>+ 0.00</b>	<b>+ 0.00</b>	<b>=</b>	<b>7.64</b>
<b>Shallow Concentrated Flow</b>					
Flow length (ft)	= 209.00	0.00	0.00		
Watercourse slope (%)	= 14.80	0.00	0.00		
Surface description	= Unpaved	Paved	Paved		
Average velocity (ft/s)	= 6.21	0.00	0.00		
<b>Travel Time (min)</b>	<b>= 0.56</b>	<b>+ 0.00</b>	<b>+ 0.00</b>	<b>=</b>	<b>0.56</b>
<b>Channel Flow</b>					
X sectional flow area (sqft)	= 0.00	0.00	0.00		
Wetted perimeter (ft)	= 0.00	0.00	0.00		
Channel slope (%)	= 0.00	0.00	0.00		
Manning's n-value	= 0.035	0.015	0.015		
Velocity (ft/s)	= 0.00	0.00	0.00		
Flow length (ft)	({0}) 0.0	0.0	0.0		
<b>Travel Time (min)</b>	<b>= 0.00</b>	<b>+ 0.00</b>	<b>+ 0.00</b>	<b>=</b>	<b>0.00</b>
<b>Total Travel Time, Tc .....</b>					<b>8.20 min</b>

# Hydrograph Report

Hydraflow Hydrographs Extension for AutoCAD® Civil 3D® 2015 by Autodesk, Inc. v10.4


Sunday, 11 / 6 / 2016

## Hyd. No. 3

### POST DETAINED DA1

Hydrograph type	= SCS Runoff	Peak discharge	= 0.270 cfs
Storm frequency	= 2 yrs	Time to peak	= 12.23 hrs
Time interval	= 2 min	Hyd. volume	= 1,214 cuft
Drainage area	= 0.330 ac	Curve number	= 80*
Basin Slope	= 0.0 %	Hydraulic length	= 0 ft
Tc method	= User	Time of conc. (Tc)	= 33.70 min
Total precip.	= 2.66 in	Distribution	= Type II
Storm duration	= 24 hrs	Shape factor	= 484

\* Composite (Area/CN) = [(0.100 x 89) + (0.030 x 91) + (0.010 x 58) + (0.080 x 71) + (0.110 x 78)] / 0.330

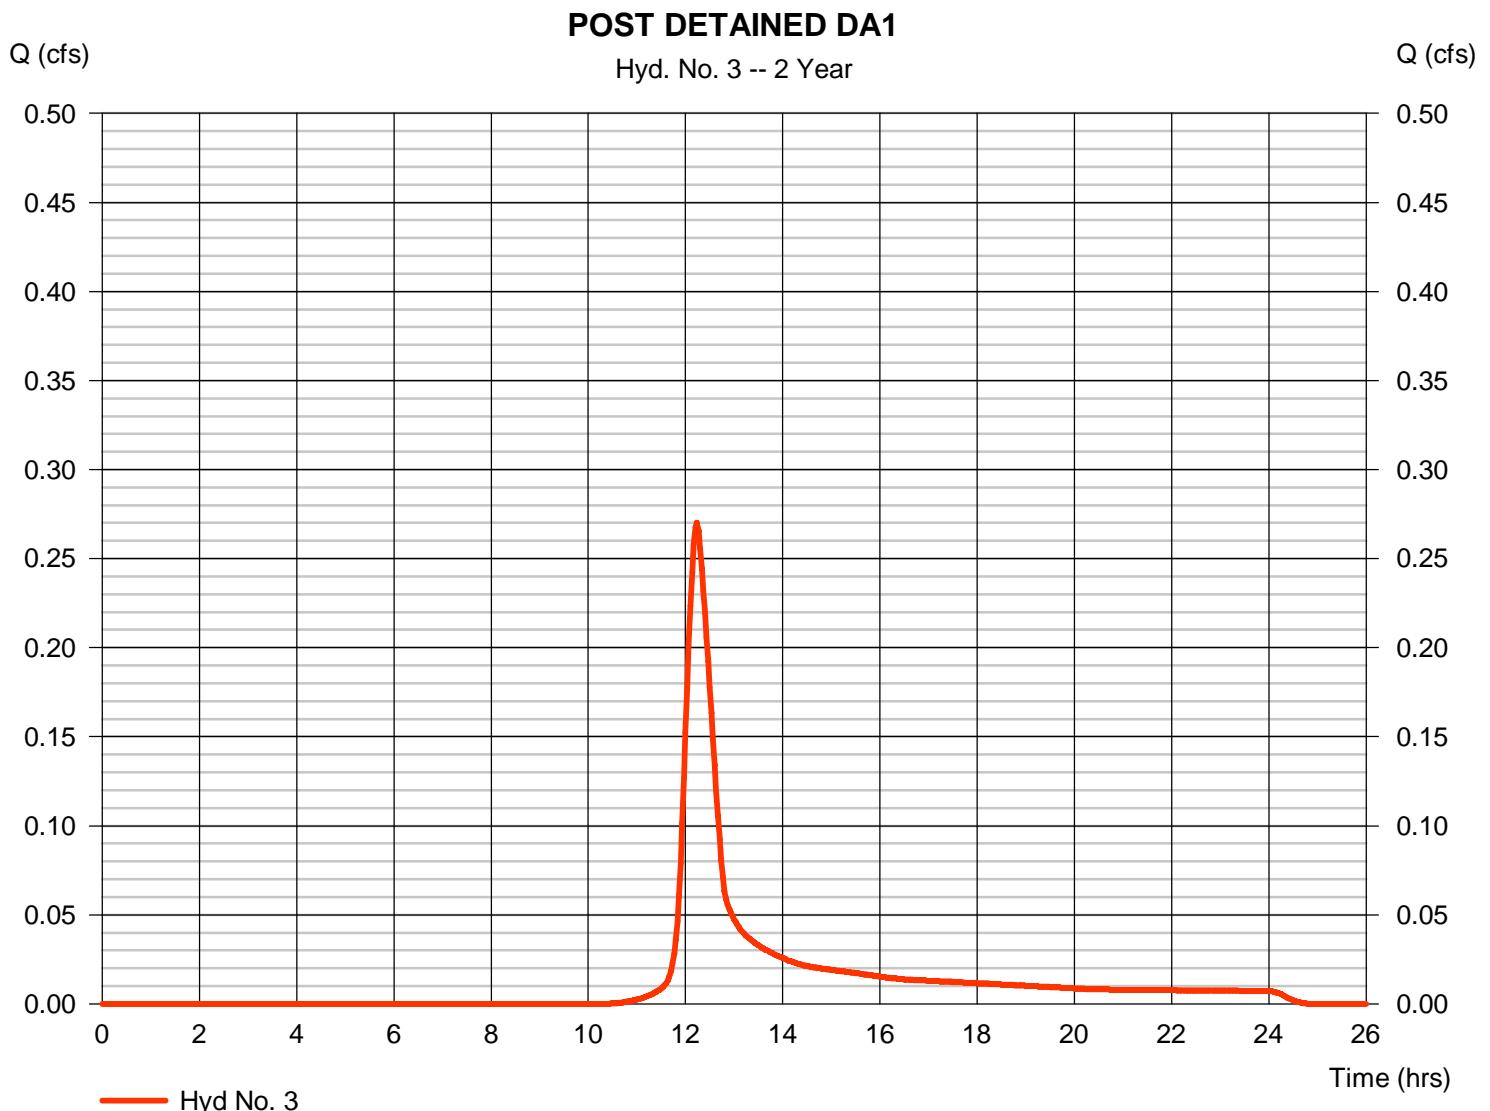

# Hydrograph Report


Hydraflow Hydrographs Extension for AutoCAD® Civil 3D® 2015 by Autodesk, Inc. v10.4

Sunday, 11 / 6 / 2016

## Hyd. No. 4

### VOLUME ABSTRACTION

Hydrograph type	= Diversion1	Peak discharge	= 0.270 cfs
Storm frequency	= 2 yrs	Time to peak	= 12.23 hrs
Time interval	= 2 min	Hyd. volume	= 841 cuft
Inflow hydrograph	= 3 - POST DETAINED DA1	2nd diverted hyd.	= 5
Diversion method	= First Flush Volume	Volume Up To	= 840.00 cuft

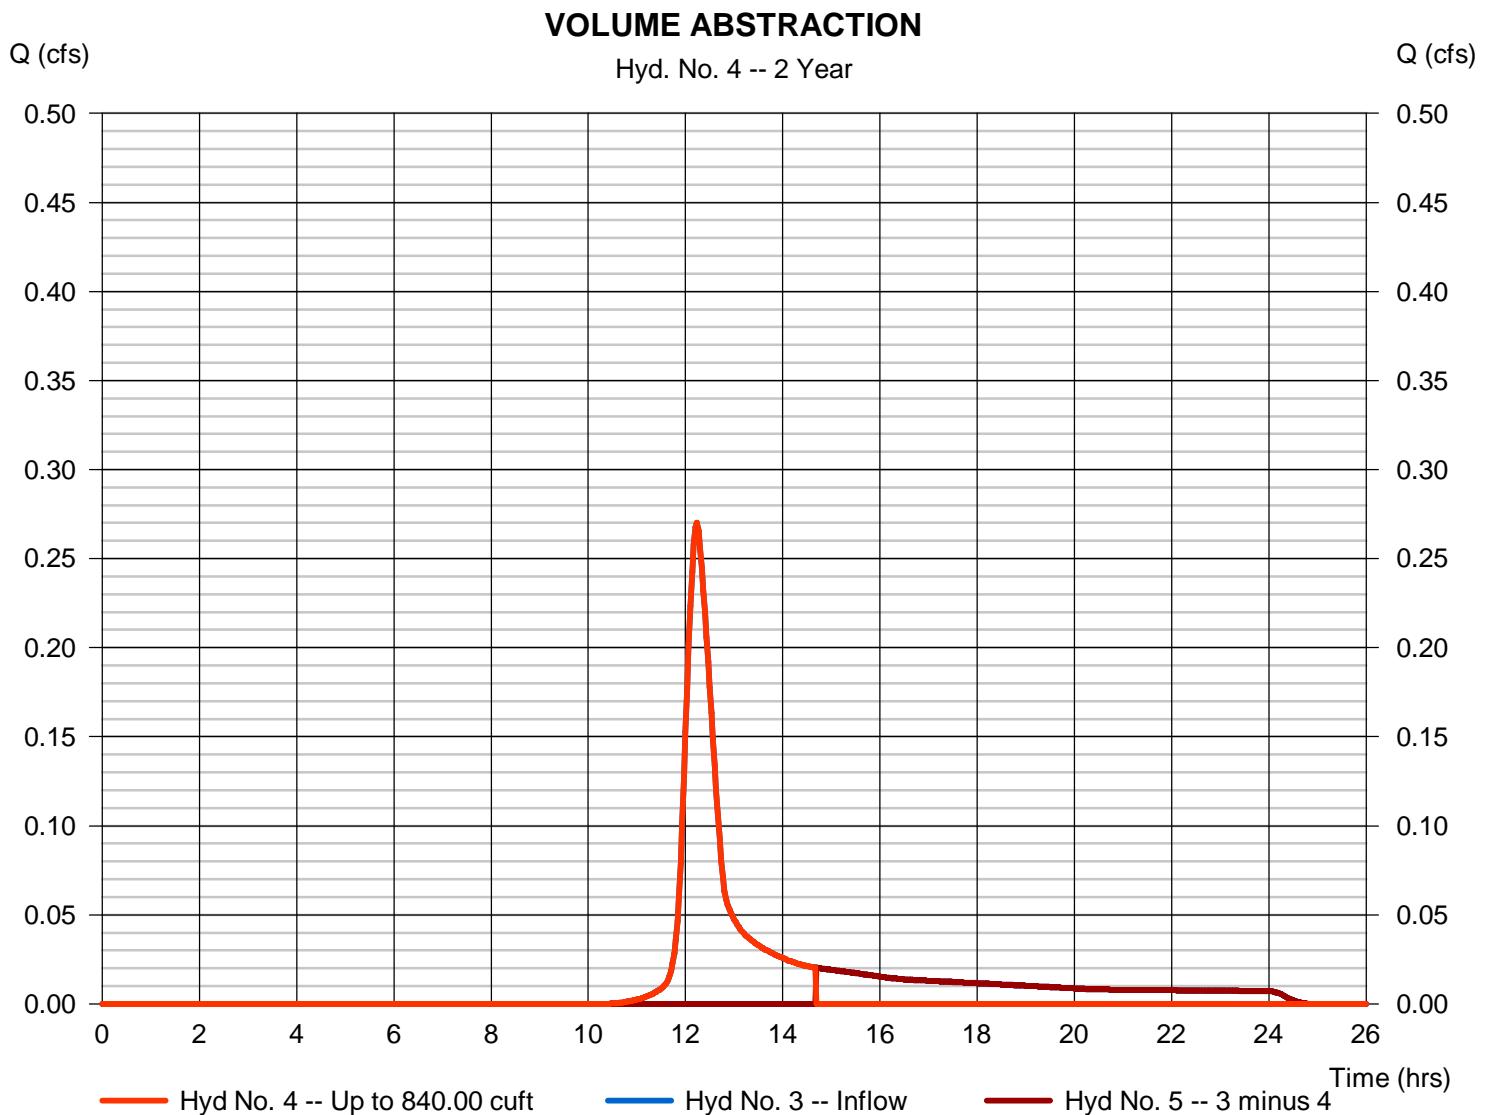

# Hydrograph Report


Hydraflow Hydrographs Extension for AutoCAD® Civil 3D® 2015 by Autodesk, Inc. v10.4

Sunday, 11 / 6 / 2016

## Hyd. No. 5

### POST AFTER BMP

Hydrograph type	= Diversion2	Peak discharge	= 0.020 cfs
Storm frequency	= 2 yrs	Time to peak	= 14.70 hrs
Time interval	= 2 min	Hyd. volume	= 373 cuft
Inflow hydrograph	= 3 - POST DETAINED DA1	2nd diverted hyd.	= 4
Diversion method	= First Flush Volume	Volume Up To	= 840.00 cuft

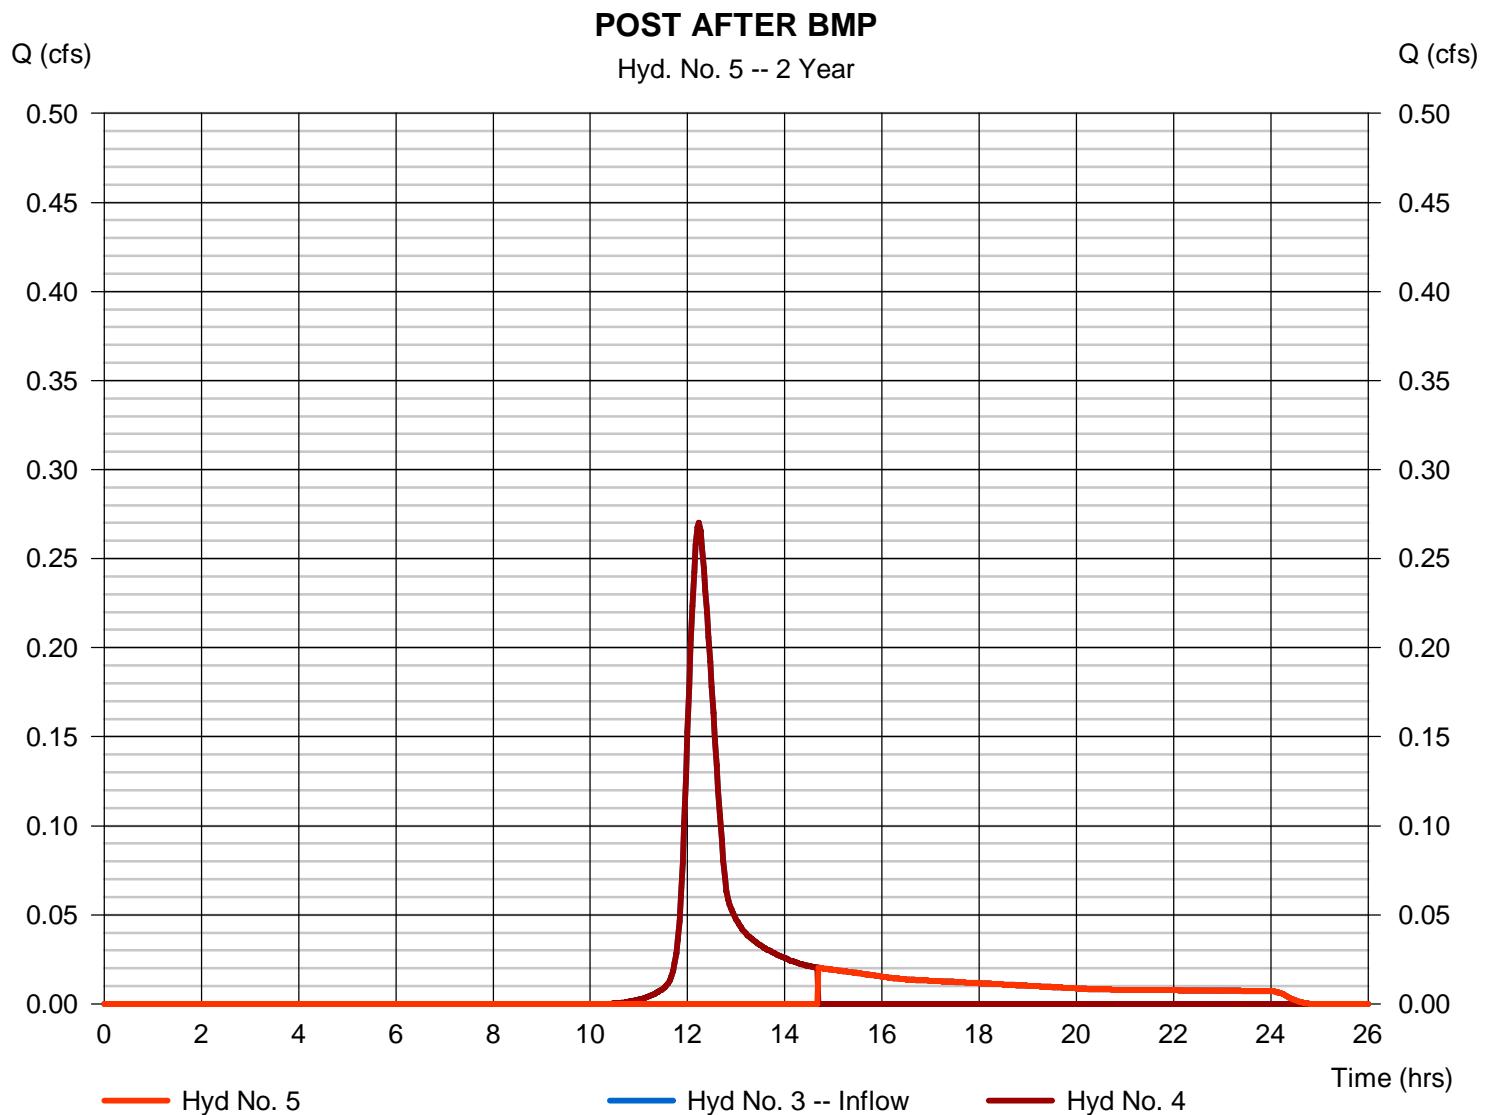

# Hydrograph Report


Hydraflow Hydrographs Extension for AutoCAD® Civil 3D® 2015 by Autodesk, Inc. v10.4

Sunday, 11 / 6 / 2016

## Hyd. No. 6

### POST AT POI DA1

Hydrograph type	= Combine	Peak discharge	= 1.021 cfs
Storm frequency	= 2 yrs	Time to peak	= 12.00 hrs
Time interval	= 2 min	Hyd. volume	= 2,827 cuft
Inflow hyds.	= 2, 5	Contrib. drain. area	= 1.030 ac

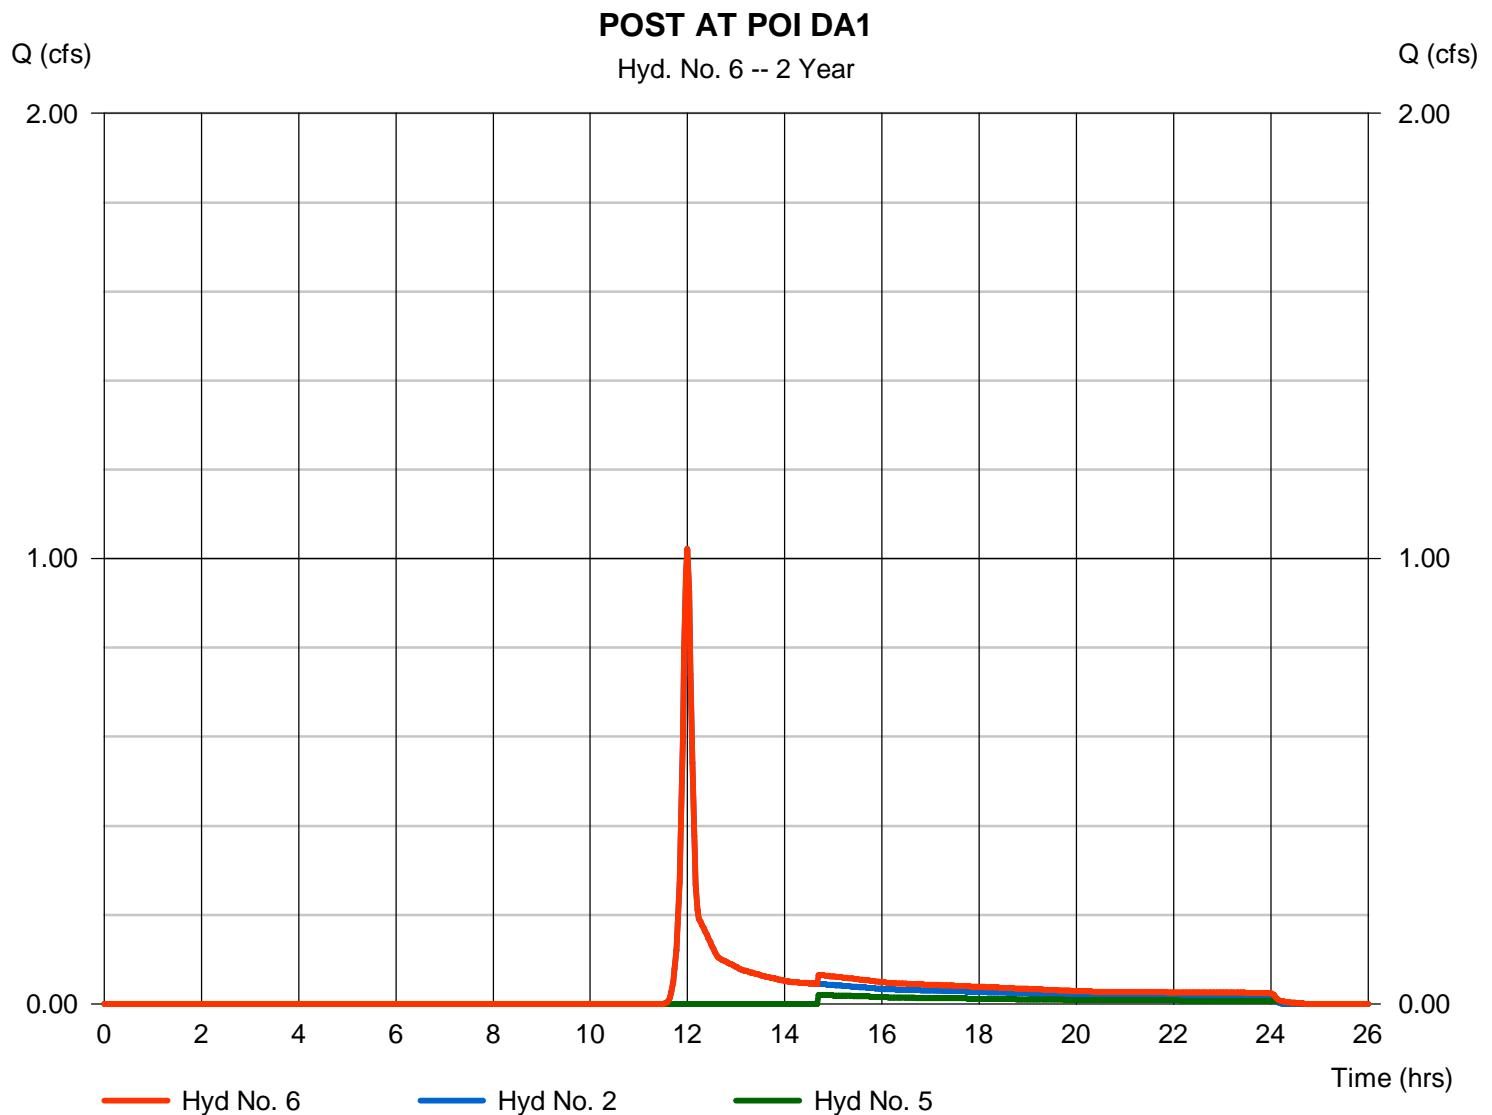

# Hydraflow Rainfall Report

Return Period (Yrs)	Intensity-Duration-Frequency Equation Coefficients (FHA)			
	B	D	E	(N/A)
1	39.9938	10.0000	0.8826	-----
2	46.8600	10.1000	0.8723	-----
3	0.0000	0.0000	0.0000	-----
5	47.4204	9.3000	0.8196	-----
10	26589.4199	47.3998	2.1160	-----
25	53942.1797	51.5998	2.2139	-----
50	69308.7266	52.6998	2.2395	-----
100	106327.6016	55.1997	2.2977	-----

File name: Charger IDF.IDF

$$\text{Intensity} = B / (T_c + D)^E$$


Return Period (Yrs)	Intensity Values (in/hr)											
	5 min	10	15	20	25	30	35	40	45	50	55	60
1	3.66	2.84	2.33	1.99	1.73	1.54	1.39	1.27	1.16	1.08	1.00	0.94
2	4.39	3.42	2.82	2.40	2.10	1.87	1.69	1.54	1.42	1.32	1.23	1.15
3	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
5	5.36	4.19	3.47	2.98	2.62	2.34	2.12	1.94	1.80	1.67	1.56	1.47
10	6.12	5.04	4.23	3.59	3.09	2.68	2.35	2.07	1.84	1.65	1.48	1.34
25	7.10	5.89	4.95	4.22	3.63	3.16	2.77	2.45	2.17	1.94	1.75	1.58
50	7.88	6.54	5.51	4.70	4.05	3.52	3.09	2.73	2.42	2.17	1.95	1.76
100	8.66	7.21	6.09	5.20	4.48	3.90	3.42	3.02	2.69	2.40	2.16	1.95

Tc = time in minutes. Values may exceed 60.

ESCGP-2\PPP\02 SCRO\07 PCSM\Attach 4 Stormwater Calcs\Charger\Hydraflow Rev 1\Charger Precip.pc

# Watershed Model Schematic

Hydraflow Hydrographs Extension for AutoCAD® Civil 3D® 2015 by Autodesk, Inc. v10.4

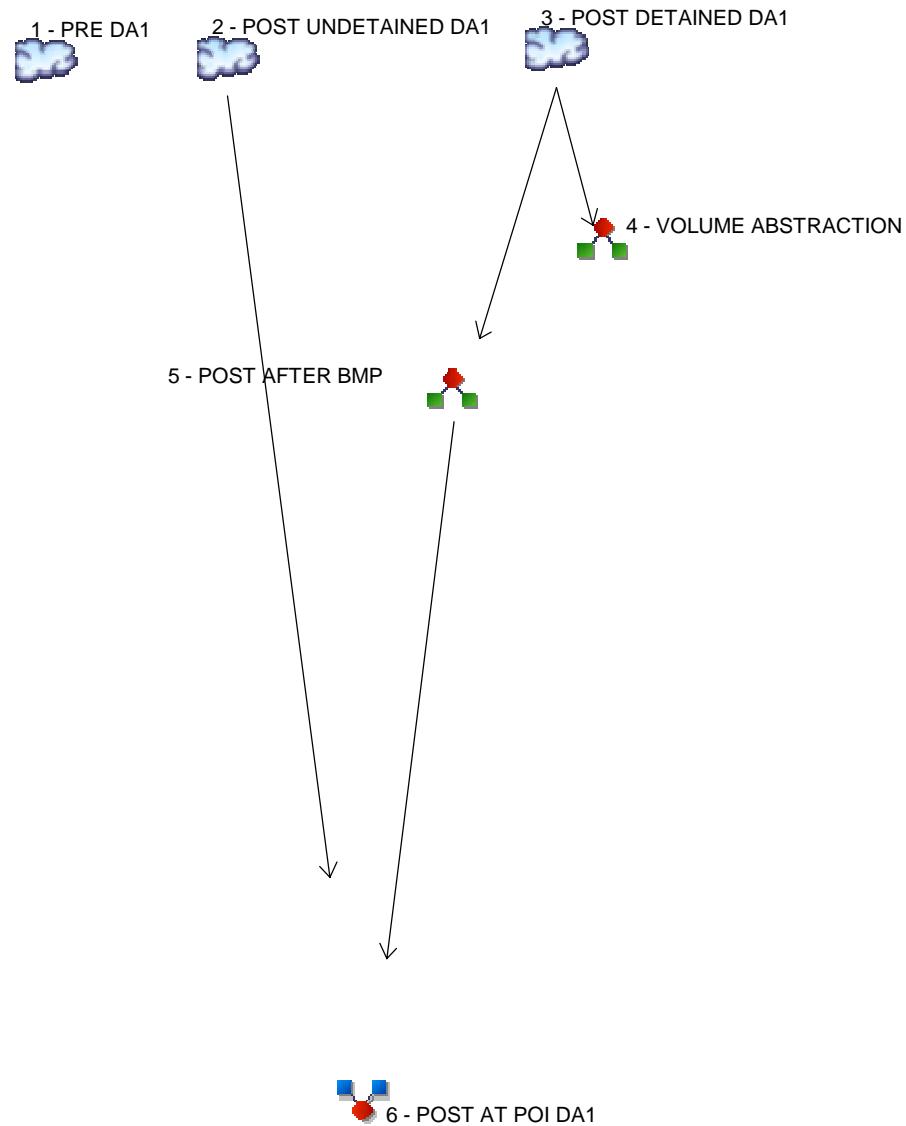

## Legend

### Hyd. Origin      Description

1	SCS Runoff	PRE DA1
2	SCS Runoff	POST UNDETAINED DA1
3	SCS Runoff	POST DETAINED DA1
4	Diversion1	VOLUME ABSTRACTION
5	Diversion2	POST AFTER BMP
6	Combine	POST AT POI DA1

# Hydrograph Return Period Recap

Hydraflow Hydrographs Extension for AutoCAD® Civil 3D® 2015 by Autodesk, Inc. v10.4

Hyd. No.	Hydrograph type (origin)	Inflow hyd(s)	Peak Outflow (cfs)								Hydrograph Description
			1-yr	2-yr	3-yr	5-yr	10-yr	25-yr	50-yr	100-yr	
1	SCS Runoff	-----	-----	-----	-----	-----	3.025	-----	-----	-----	PRE DA1
2	SCS Runoff	-----	-----	-----	-----	-----	2.291	-----	-----	-----	POST UNDETAINED DA1
3	SCS Runoff	-----	-----	-----	-----	-----	0.668	-----	-----	-----	POST DETAINED DA1
4	Diversion1	3	-----	-----	-----	-----	0.668	-----	-----	-----	VOLUME ABSTRACTION
5	Diversion2	3	-----	-----	-----	-----	0.539	-----	-----	-----	POST AFTER BMP
6	Combine	2, 5	-----	-----	-----	-----	2.291	-----	-----	-----	POST AT POI DA1

# Hydrograph Summary Report

Hydraflow Hydrographs Extension for AutoCAD® Civil 3D® 2015 by Autodesk, Inc. v10.4

Hyd. No.	Hydrograph type (origin)	Peak flow (cfs)	Time interval (min)	Time to Peak (min)	Hyd. volume (cuft)	Inflow hyd(s)	Maximum elevation (ft)	Total strge used (cuft)	Hydrograph Description
1	SCS Runoff	3.025	2	720	6,944	-----	-----	-----	PRE DA1
2	SCS Runoff	2.291	2	720	5,259	-----	-----	-----	POST UNDETAINED DA1
3	SCS Runoff	0.668	2	726	2,319	-----	-----	-----	POST DETAINED DA1
4	Diversion1	0.668	2	726	883	3	-----	-----	VOLUME ABSTRACTION
5	Diversion2	0.539	2	734	1,436	3	-----	-----	POST AFTER BMP
6	Combine	2.291	2	720	6,695	2, 5	-----	-----	POST AT POI DA1

# Hydrograph Report

Hydraflow Hydrographs Extension for AutoCAD® Civil 3D® 2015 by Autodesk, Inc. v10.4


Sunday, 11 / 6 / 2016

## Hyd. No. 1

PRE DA1

Hydrograph type	= SCS Runoff	Peak discharge	= 3.025 cfs
Storm frequency	= 10 yrs	Time to peak	= 12.00 hrs
Time interval	= 2 min	Hyd. volume	= 6,944 cuft
Drainage area	= 1.360 ac	Curve number	= 73*
Basin Slope	= 0.0 %	Hydraulic length	= 0 ft
Tc method	= TR55	Time of conc. (Tc)	= 8.20 min
Total precip.	= 3.83 in	Distribution	= Type II
Storm duration	= 24 hrs	Shape factor	= 484

\* Composite (Area/CN) = [(0.100 x 58) + (0.150 x 71) + (0.040 x 78) + (0.010 x 55) + (0.390 x 70) + (0.670 x 77)] / 1.360

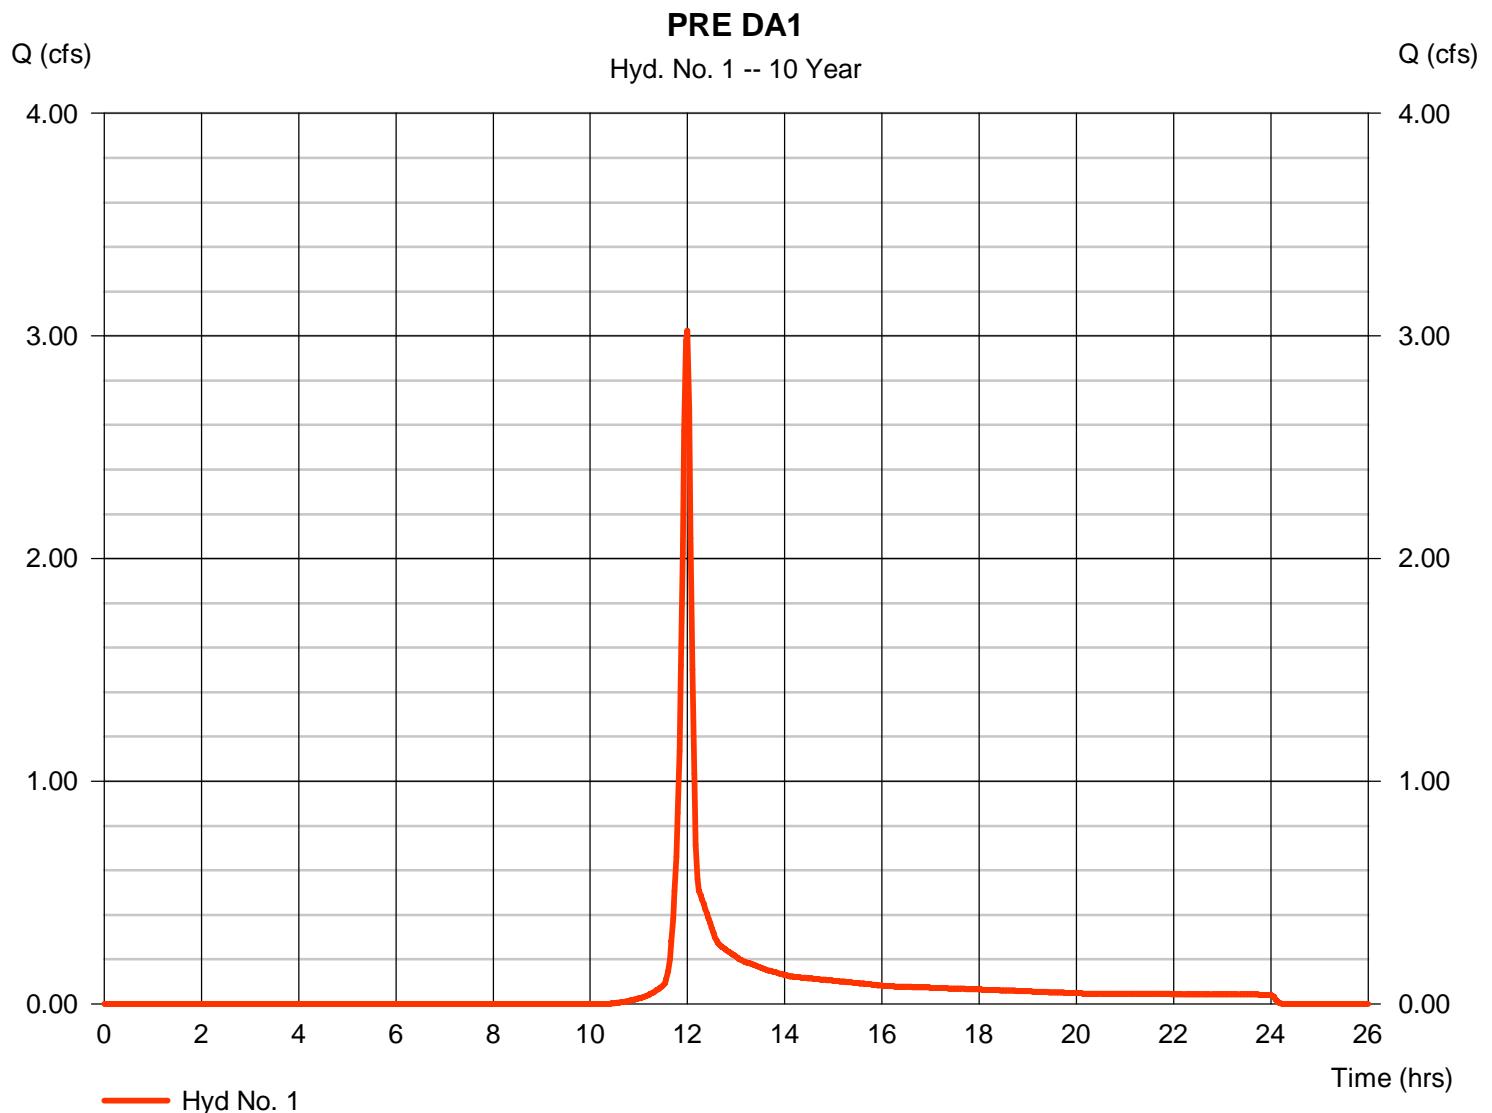

# TR55 Tc Worksheet

Hydraflow Hydrographs Extension for AutoCAD® Civil 3D® 2015 by Autodesk, Inc. v10.4

## Hyd. No. 1

PRE DA1

<u>Description</u>	<u>A</u>	<u>B</u>	<u>C</u>	<u>Totals</u>	
<b>Sheet Flow</b>					
Manning's n-value	= 0.240	0.011	0.011		
Flow length (ft)	= 50.0	0.0	0.0		
Two-year 24-hr precip. (in)	= 2.66	0.00	0.00		
Land slope (%)	= 3.00	0.00	0.00		
<b>Travel Time (min)</b>	<b>= 7.64</b>	<b>+ 0.00</b>	<b>+ 0.00</b>	<b>=</b>	<b>7.64</b>
<b>Shallow Concentrated Flow</b>					
Flow length (ft)	= 209.00	0.00	0.00		
Watercourse slope (%)	= 14.80	0.00	0.00		
Surface description	= Unpaved	Paved	Paved		
Average velocity (ft/s)	= 6.21	0.00	0.00		
<b>Travel Time (min)</b>	<b>= 0.56</b>	<b>+ 0.00</b>	<b>+ 0.00</b>	<b>=</b>	<b>0.56</b>
<b>Channel Flow</b>					
X sectional flow area (sqft)	= 0.00	0.00	0.00		
Wetted perimeter (ft)	= 0.00	0.00	0.00		
Channel slope (%)	= 0.00	0.00	0.00		
Manning's n-value	= 0.035	0.015	0.015		
Velocity (ft/s)	= 0.00	0.00	0.00		
Flow length (ft)	({0}) 0.0	0.0	0.0		
<b>Travel Time (min)</b>	<b>= 0.00</b>	<b>+ 0.00</b>	<b>+ 0.00</b>	<b>=</b>	<b>0.00</b>
<b>Total Travel Time, Tc .....</b>					<b>8.20 min</b>

# Hydrograph Report

Hydraflow Hydrographs Extension for AutoCAD® Civil 3D® 2015 by Autodesk, Inc. v10.4

Sunday, 11 / 6 / 2016

## Hyd. No. 2


### POST UNDETAINED DA1

Hydrograph type	= SCS Runoff	Peak discharge	= 2.291 cfs
Storm frequency	= 10 yrs	Time to peak	= 12.00 hrs
Time interval	= 2 min	Hyd. volume	= 5,259 cuft
Drainage area	= 1.030 ac	Curve number	= 73*
Basin Slope	= 0.0 %	Hydraulic length	= 0 ft
Tc method	= TR55	Time of conc. (Tc)	= 8.20 min
Total precip.	= 3.83 in	Distribution	= Type II
Storm duration	= 24 hrs	Shape factor	= 484

\* Composite (Area/CN) = [(0.100 x 58) + (0.320 x 71) + (0.160 x 78) + (0.050 x 70) + (0.400 x 77)] / 1.030

### POST UNDETAINED DA1

Hyd. No. 2 -- 10 Year

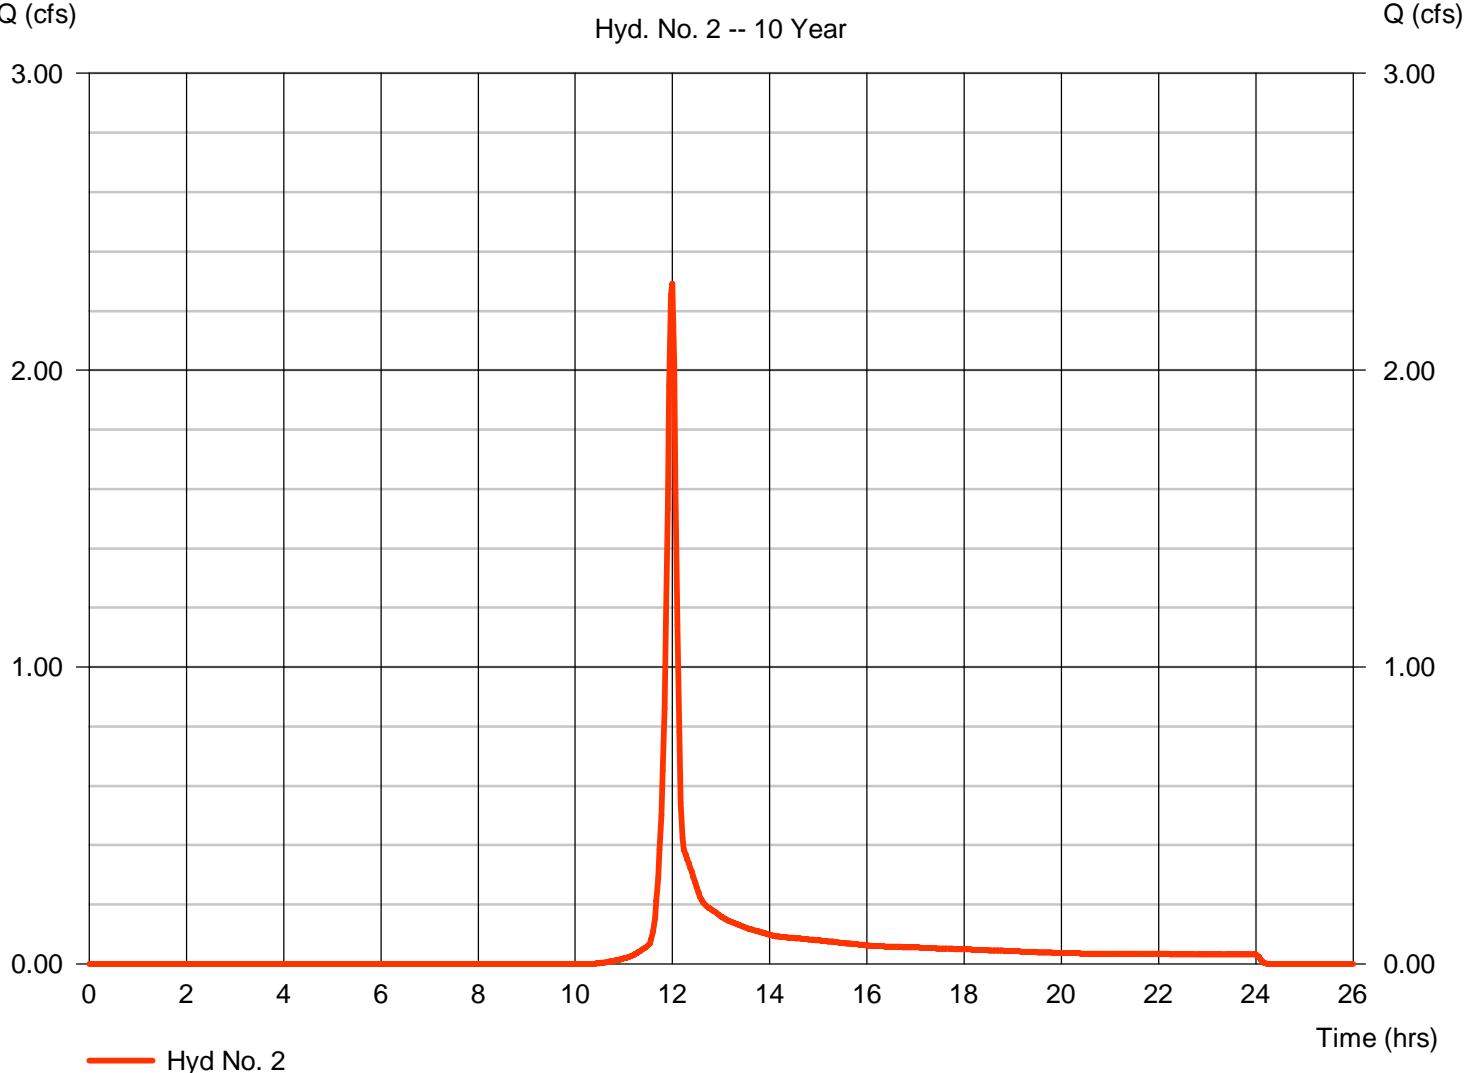

# TR55 Tc Worksheet

Hydraflow Hydrographs Extension for AutoCAD® Civil 3D® 2015 by Autodesk, Inc. v10.4

## Hyd. No. 2

POST UNDETAINED DA1

<u>Description</u>	<u>A</u>	<u>B</u>	<u>C</u>	<u>Totals</u>	
<b>Sheet Flow</b>					
Manning's n-value	= 0.240	0.011	0.011		
Flow length (ft)	= 50.0	0.0	0.0		
Two-year 24-hr precip. (in)	= 2.66	0.00	0.00		
Land slope (%)	= 3.00	0.00	0.00		
<b>Travel Time (min)</b>	<b>= 7.64</b>	<b>+ 0.00</b>	<b>+ 0.00</b>	<b>=</b>	<b>7.64</b>
<b>Shallow Concentrated Flow</b>					
Flow length (ft)	= 209.00	0.00	0.00		
Watercourse slope (%)	= 14.80	0.00	0.00		
Surface description	= Unpaved	Paved	Paved		
Average velocity (ft/s)	= 6.21	0.00	0.00		
<b>Travel Time (min)</b>	<b>= 0.56</b>	<b>+ 0.00</b>	<b>+ 0.00</b>	<b>=</b>	<b>0.56</b>
<b>Channel Flow</b>					
X sectional flow area (sqft)	= 0.00	0.00	0.00		
Wetted perimeter (ft)	= 0.00	0.00	0.00		
Channel slope (%)	= 0.00	0.00	0.00		
Manning's n-value	= 0.035	0.015	0.015		
Velocity (ft/s)	= 0.00	0.00	0.00		
Flow length (ft)	({0}) 0.0	0.0	0.0		
<b>Travel Time (min)</b>	<b>= 0.00</b>	<b>+ 0.00</b>	<b>+ 0.00</b>	<b>=</b>	<b>0.00</b>
<b>Total Travel Time, Tc .....</b>					<b>8.20 min</b>

# Hydrograph Report

Hydraflow Hydrographs Extension for AutoCAD® Civil 3D® 2015 by Autodesk, Inc. v10.4


Sunday, 11 / 6 / 2016

## Hyd. No. 3

### POST DETAINED DA1

Hydrograph type	= SCS Runoff	Peak discharge	= 0.668 cfs
Storm frequency	= 10 yrs	Time to peak	= 12.10 hrs
Time interval	= 2 min	Hyd. volume	= 2,319 cuft
Drainage area	= 0.330 ac	Curve number	= 80*
Basin Slope	= 0.0 %	Hydraulic length	= 0 ft
Tc method	= User	Time of conc. (Tc)	= 21.30 min
Total precip.	= 3.83 in	Distribution	= Type II
Storm duration	= 24 hrs	Shape factor	= 484

\* Composite (Area/CN) = [(0.100 x 89) + (0.030 x 91) + (0.010 x 58) + (0.080 x 71) + (0.110 x 78)] / 0.330

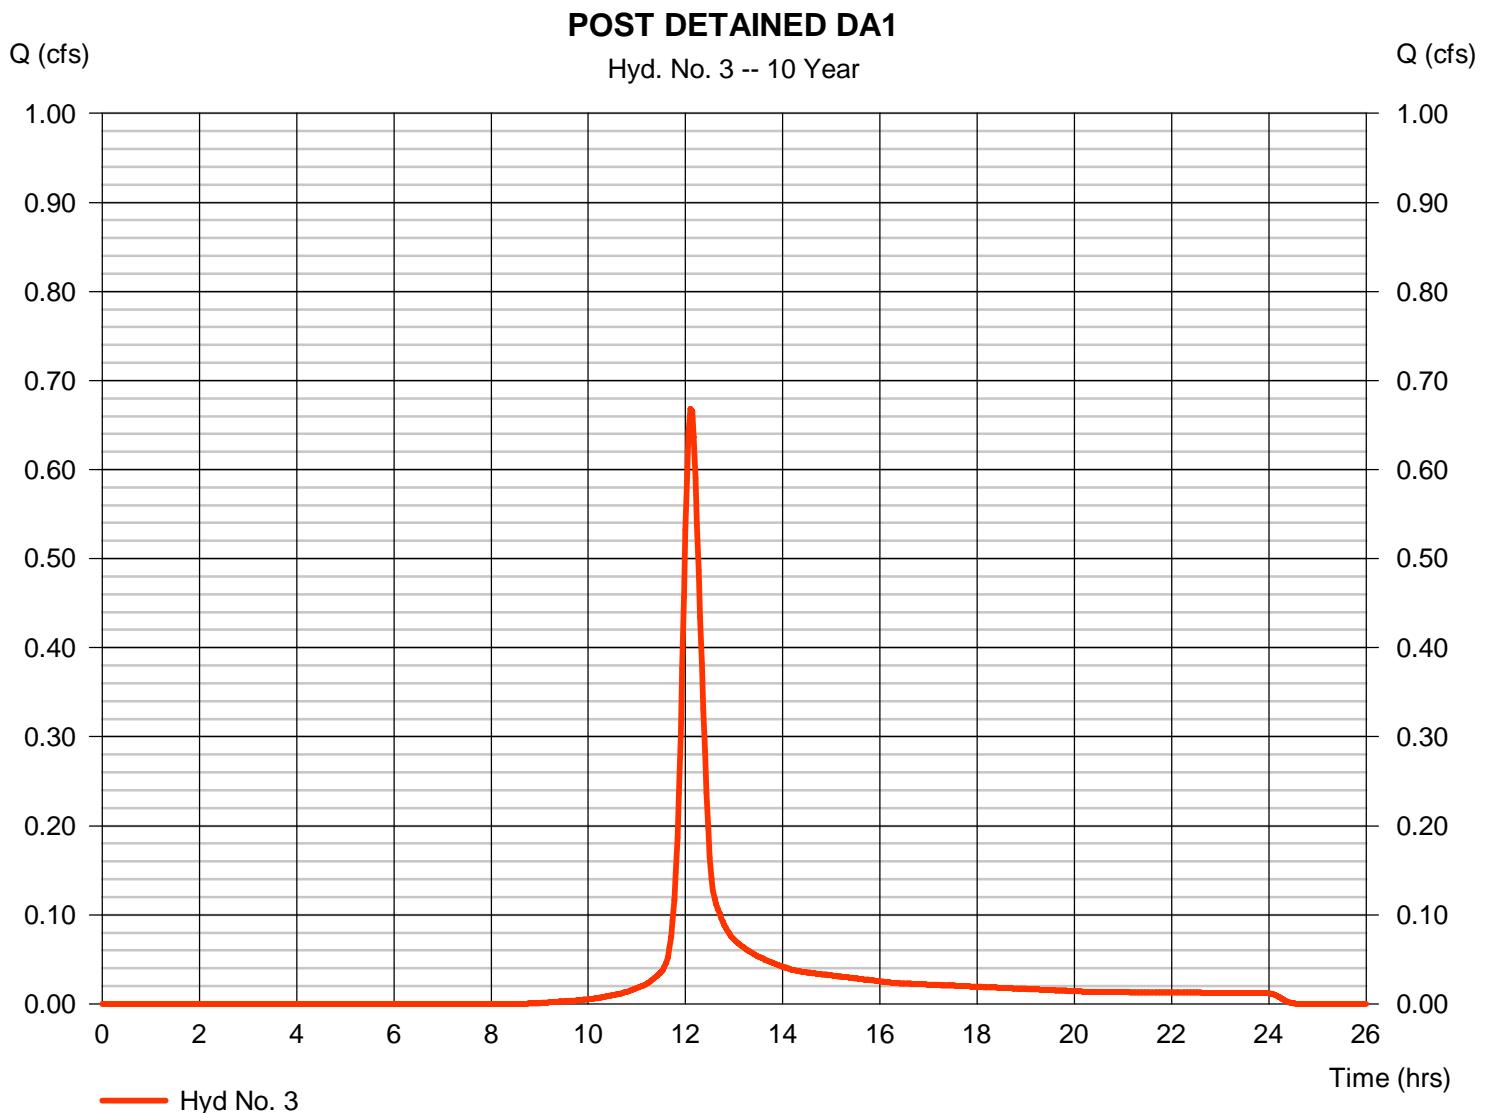

# Hydrograph Report


Hydraflow Hydrographs Extension for AutoCAD® Civil 3D® 2015 by Autodesk, Inc. v10.4

Sunday, 11 / 6 / 2016

## Hyd. No. 4

### VOLUME ABSTRACTION

Hydrograph type	= Diversion1	Peak discharge	= 0.668 cfs
Storm frequency	= 10 yrs	Time to peak	= 12.10 hrs
Time interval	= 2 min	Hyd. volume	= 883 cuft
Inflow hydrograph	= 3 - POST DETAINED DA1	2nd diverted hyd.	= 5
Diversion method	= First Flush Volume	Volume Up To	= 840.00 cuft

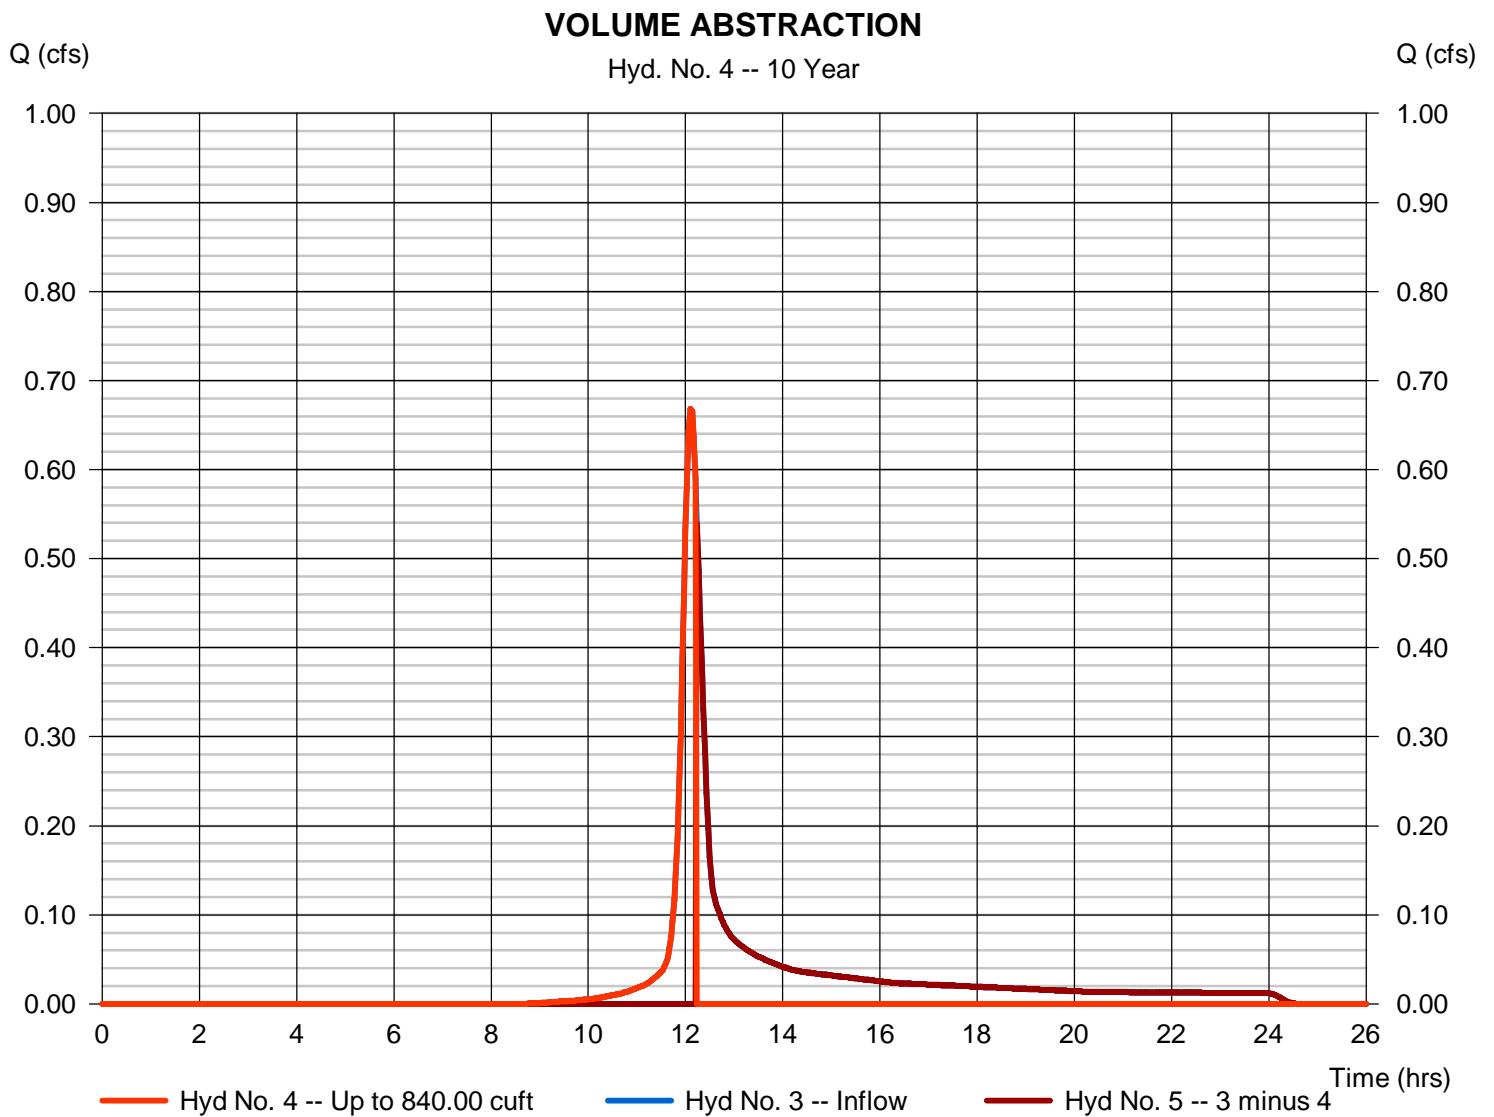

# Hydrograph Report


Hydraflow Hydrographs Extension for AutoCAD® Civil 3D® 2015 by Autodesk, Inc. v10.4

Sunday, 11 / 6 / 2016

## Hyd. No. 5

### POST AFTER BMP

Hydrograph type	= Diversion2	Peak discharge	= 0.539 cfs
Storm frequency	= 10 yrs	Time to peak	= 12.23 hrs
Time interval	= 2 min	Hyd. volume	= 1,436 cuft
Inflow hydrograph	= 3 - POST DETAINED DA1	2nd diverted hyd.	= 4
Diversion method	= First Flush Volume	Volume Up To	= 840.00 cuft

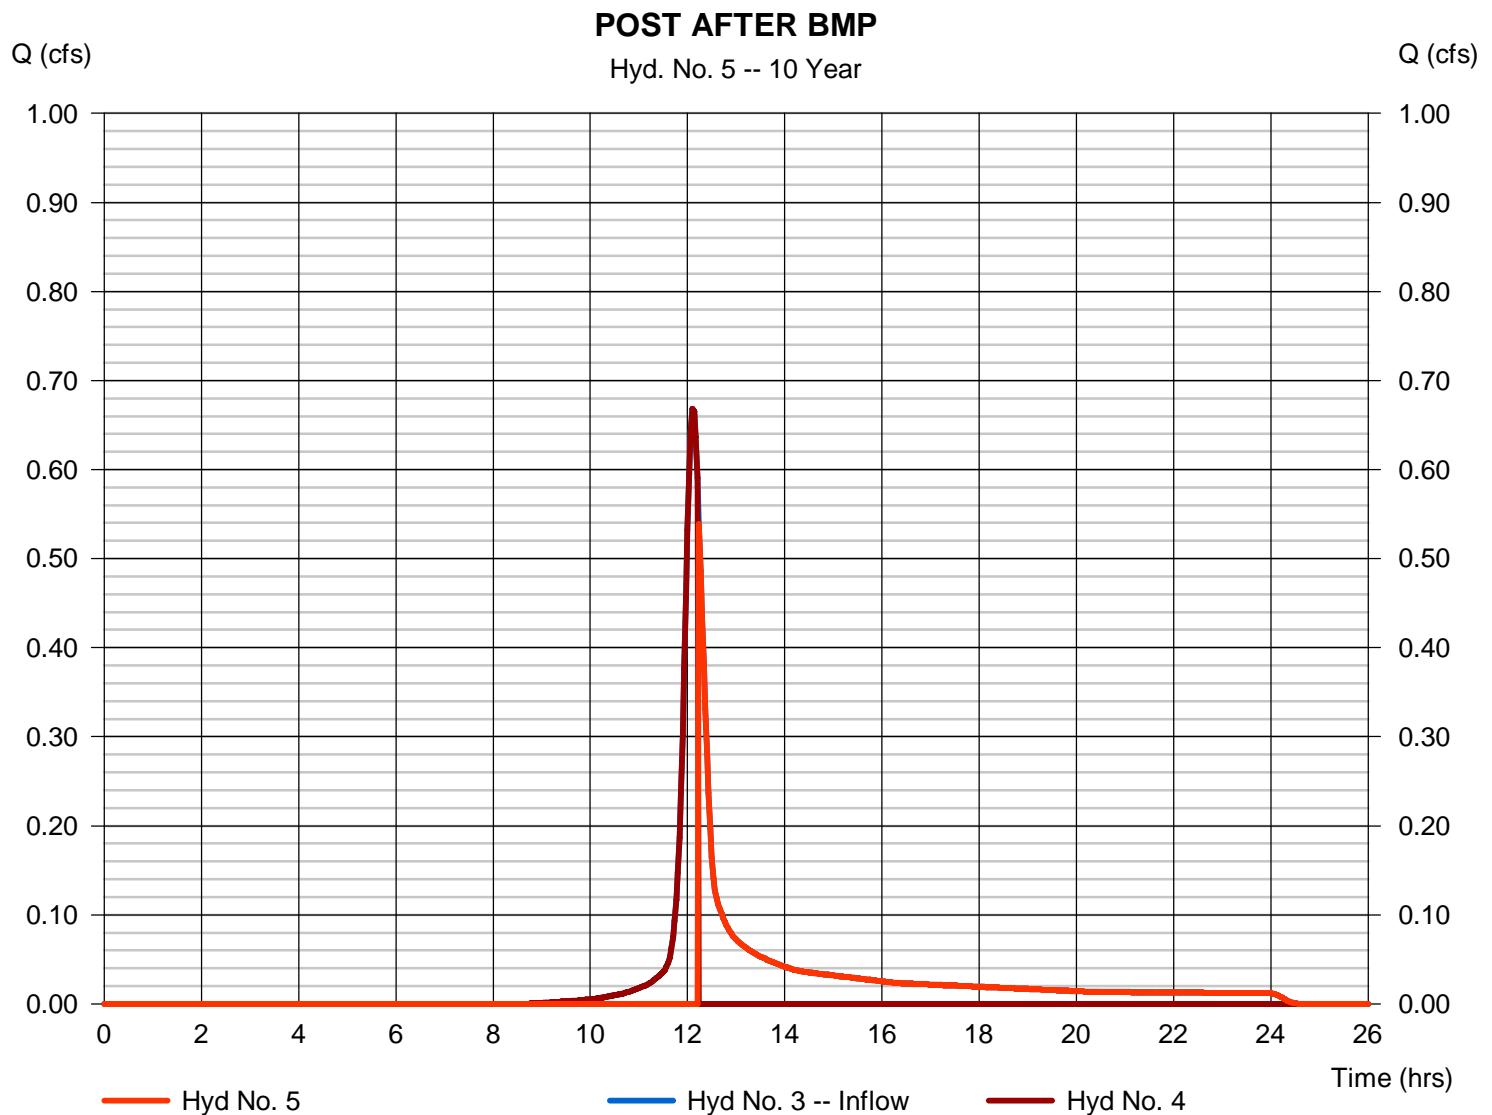

# Hydrograph Report


Hydraflow Hydrographs Extension for AutoCAD® Civil 3D® 2015 by Autodesk, Inc. v10.4

Sunday, 11 / 6 / 2016

## Hyd. No. 6

### POST AT POI DA1

Hydrograph type	= Combine	Peak discharge	= 2.291 cfs
Storm frequency	= 10 yrs	Time to peak	= 12.00 hrs
Time interval	= 2 min	Hyd. volume	= 6,695 cuft
Inflow hyds.	= 2, 5	Contrib. drain. area	= 1.030 ac

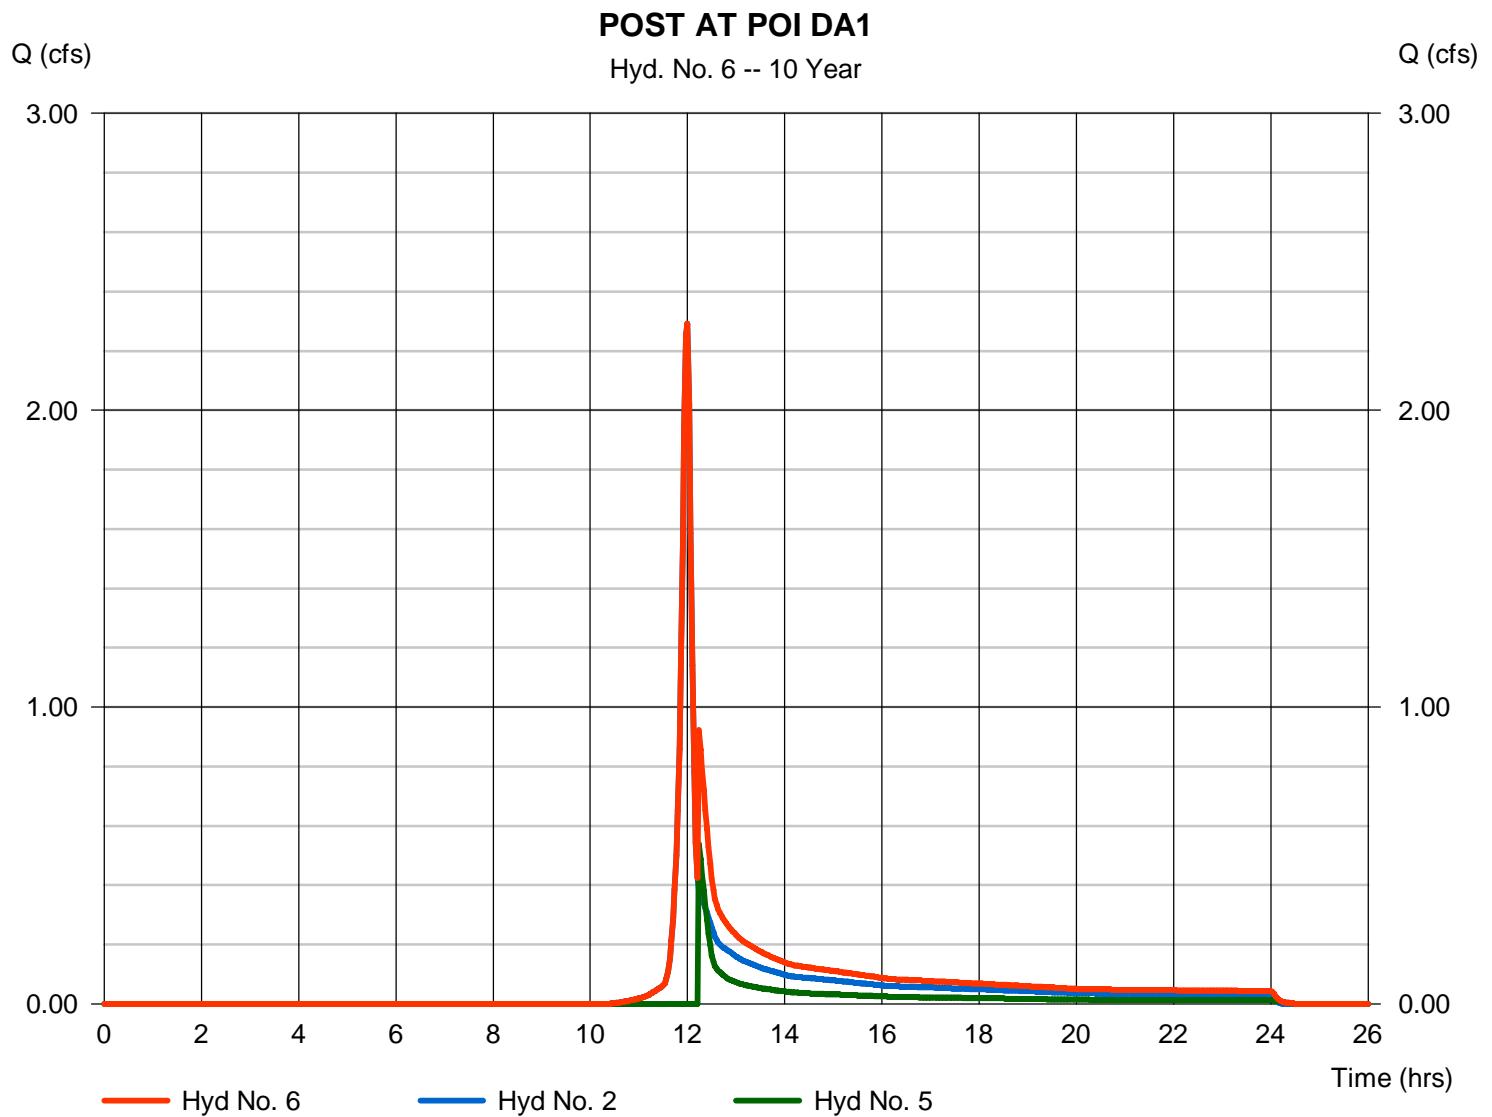

# Hydraflow Rainfall Report

Return Period (Yrs)	Intensity-Duration-Frequency Equation Coefficients (FHA)			
	B	D	E	(N/A)
1	39.9938	10.0000	0.8826	-----
2	46.8600	10.1000	0.8723	-----
3	0.0000	0.0000	0.0000	-----
5	47.4204	9.3000	0.8196	-----
10	26589.4199	47.3998	2.1160	-----
25	53942.1797	51.5998	2.2139	-----
50	69308.7266	52.6998	2.2395	-----
100	106327.6016	55.1997	2.2977	-----

File name: Charger IDF.IDF

$$\text{Intensity} = B / (T_c + D)^E$$


Return Period (Yrs)	Intensity Values (in/hr)											
	5 min	10	15	20	25	30	35	40	45	50	55	60
1	3.66	2.84	2.33	1.99	1.73	1.54	1.39	1.27	1.16	1.08	1.00	0.94
2	4.39	3.42	2.82	2.40	2.10	1.87	1.69	1.54	1.42	1.32	1.23	1.15
3	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
5	5.36	4.19	3.47	2.98	2.62	2.34	2.12	1.94	1.80	1.67	1.56	1.47
10	6.12	5.04	4.23	3.59	3.09	2.68	2.35	2.07	1.84	1.65	1.48	1.34
25	7.10	5.89	4.95	4.22	3.63	3.16	2.77	2.45	2.17	1.94	1.75	1.58
50	7.88	6.54	5.51	4.70	4.05	3.52	3.09	2.73	2.42	2.17	1.95	1.76
100	8.66	7.21	6.09	5.20	4.48	3.90	3.42	3.02	2.69	2.40	2.16	1.95

Tc = time in minutes. Values may exceed 60.

ESCGP-2\PPP\02 SCRO\07 PCSM\Attach 4 Stormwater Calcs\Charger\Hydraflow Rev 1\Charger Precip.pc

# Watershed Model Schematic

Hydraflow Hydrographs Extension for AutoCAD® Civil 3D® 2015 by Autodesk, Inc. v10.4

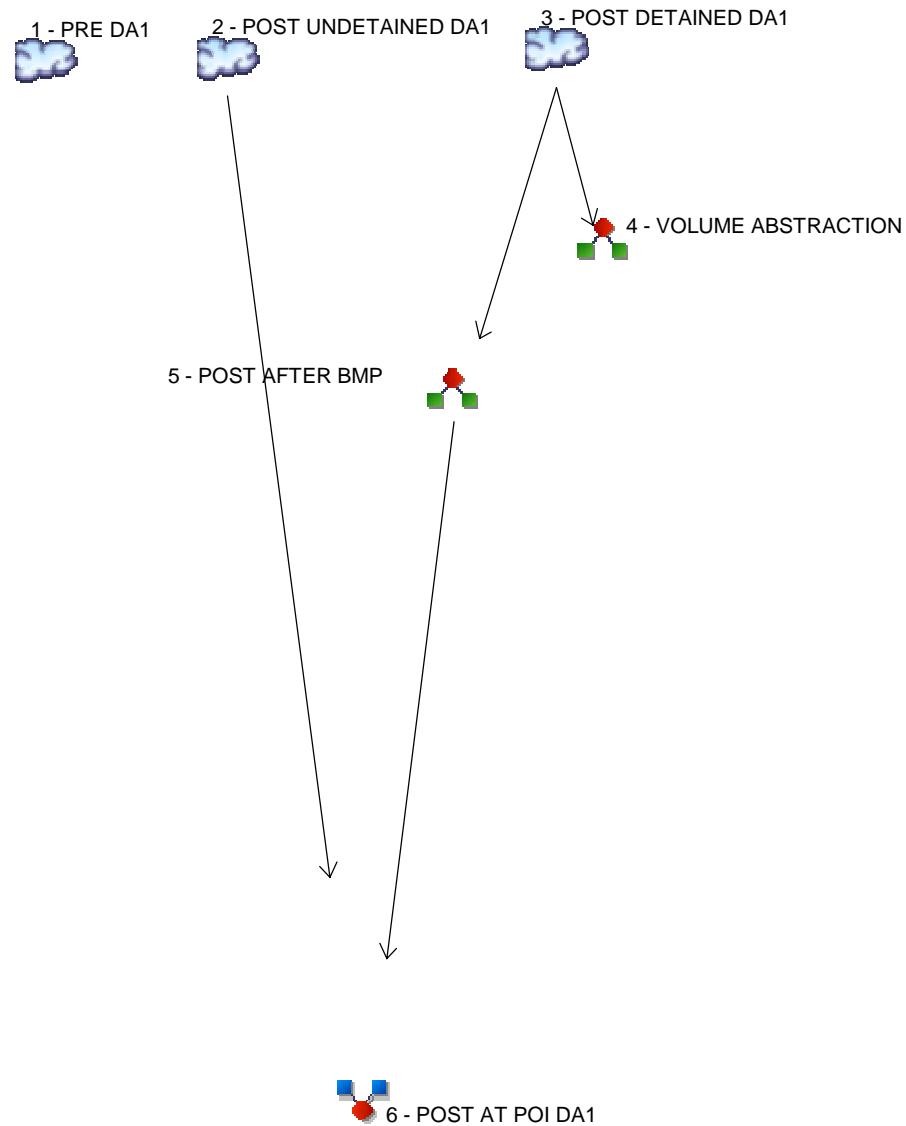

## Legend

### Hyd. Origin      Description

1	SCS Runoff	PRE DA1
2	SCS Runoff	POST UNDETAINED DA1
3	SCS Runoff	POST DETAINED DA1
4	Diversion1	VOLUME ABSTRACTION
5	Diversion2	POST AFTER BMP
6	Combine	POST AT POI DA1

# Hydrograph Return Period Recap

HydraFlow Hydrographs Extension for AutoCAD® Civil 3D® 2015 by Autodesk, Inc. v10.4

Hyd. No.	Hydrograph type (origin)	Inflow hyd(s)	Peak Outflow (cfs)								Hydrograph Description
			1-yr	2-yr	3-yr	5-yr	10-yr	25-yr	50-yr	100-yr	
1	SCS Runoff	-----	-----	-----	-----	-----	-----	-----	5.326	-----	PRE DA1
2	SCS Runoff	-----	-----	-----	-----	-----	-----	-----	4.033	-----	POST UNDETAINED DA1
3	SCS Runoff	-----	-----	-----	-----	-----	-----	-----	1.291	-----	POST DETAINED DA1
4	Diversion1	3	-----	-----	-----	-----	-----	-----	1.112	-----	VOLUME ABSTRACTION
5	Diversion2	3	-----	-----	-----	-----	-----	-----	1.291	-----	POST AFTER BMP
6	Combine	2, 5	-----	-----	-----	-----	-----	-----	5.263	-----	POST AT POI DA1

# Hydrograph Summary Report

Hydraflow Hydrographs Extension for AutoCAD® Civil 3D® 2015 by Autodesk, Inc. v10.4

Hyd. No.	Hydrograph type (origin)	Peak flow (cfs)	Time interval (min)	Time to Peak (min)	Hyd. volume (cuft)	Inflow hyd(s)	Maximum elevation (ft)	Total strge used (cuft)	Hydrograph Description
1	SCS Runoff	5.326	2	718	12,195	-----	-----	-----	PRE DA1
2	SCS Runoff	4.033	2	718	9,236	-----	-----	-----	POST UNDETAINED DA1
3	SCS Runoff	1.291	2	722	3,624	-----	-----	-----	POST DETAINED DA1
4	Diversion1	1.112	2	718	948	3	-----	-----	VOLUME ABSTRACTION
5	Diversion2	1.291	2	722	2,677	3	-----	-----	POST AFTER BMP
6	Combine	5.263	2	720	11,912	2, 5	-----	-----	POST AT POI DA1

# Hydrograph Report

Hydraflow Hydrographs Extension for AutoCAD® Civil 3D® 2015 by Autodesk, Inc. v10.4


Sunday, 11 / 6 / 2016

## Hyd. No. 1

PRE DA1

Hydrograph type	= SCS Runoff	Peak discharge	= 5.326 cfs
Storm frequency	= 50 yrs	Time to peak	= 11.97 hrs
Time interval	= 2 min	Hyd. volume	= 12,195 cuft
Drainage area	= 1.360 ac	Curve number	= 73*
Basin Slope	= 0.0 %	Hydraulic length	= 0 ft
Tc method	= TR55	Time of conc. (Tc)	= 8.20 min
Total precip.	= 5.24 in	Distribution	= Type II
Storm duration	= 24 hrs	Shape factor	= 484

\* Composite (Area/CN) = [(0.100 x 58) + (0.150 x 71) + (0.040 x 78) + (0.010 x 55) + (0.390 x 70) + (0.670 x 77)] / 1.360

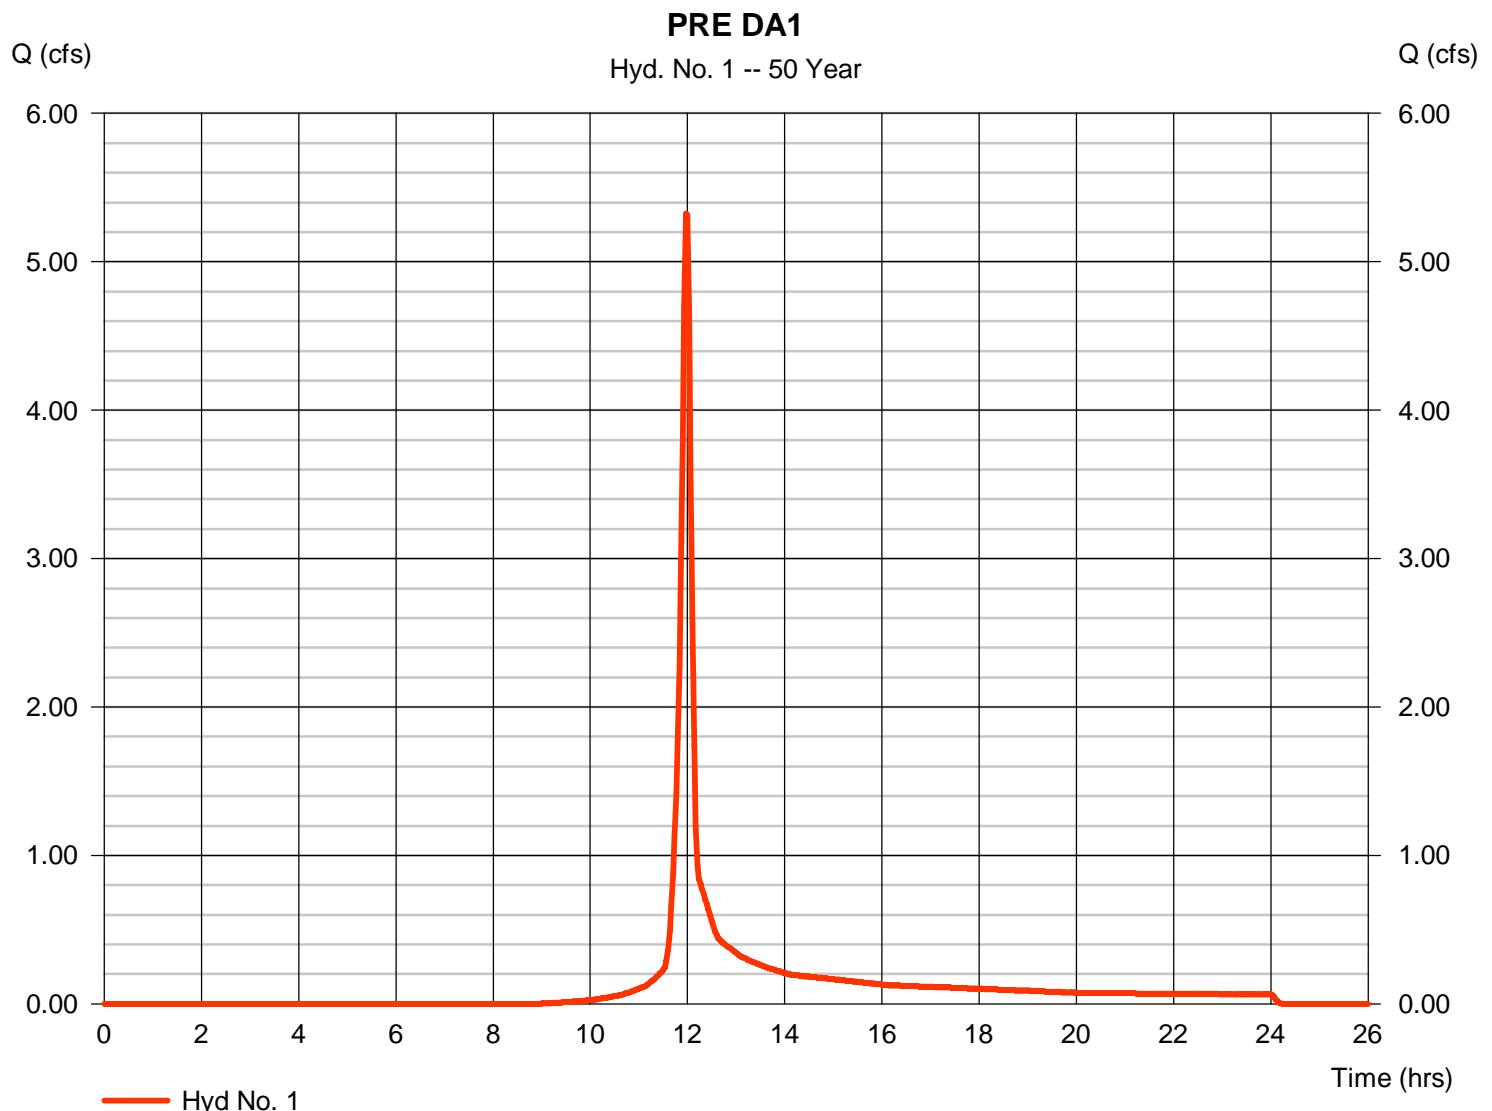

# TR55 Tc Worksheet

Hydraflow Hydrographs Extension for AutoCAD® Civil 3D® 2015 by Autodesk, Inc. v10.4

## Hyd. No. 1

PRE DA1

<u>Description</u>	<u>A</u>	<u>B</u>	<u>C</u>	<u>Totals</u>	
<b>Sheet Flow</b>					
Manning's n-value	= 0.240	0.011	0.011		
Flow length (ft)	= 50.0	0.0	0.0		
Two-year 24-hr precip. (in)	= 2.66	0.00	0.00		
Land slope (%)	= 3.00	0.00	0.00		
<b>Travel Time (min)</b>	<b>= 7.64</b>	<b>+ 0.00</b>	<b>+ 0.00</b>	<b>=</b>	<b>7.64</b>
<b>Shallow Concentrated Flow</b>					
Flow length (ft)	= 209.00	0.00	0.00		
Watercourse slope (%)	= 14.80	0.00	0.00		
Surface description	= Unpaved	Paved	Paved		
Average velocity (ft/s)	= 6.21	0.00	0.00		
<b>Travel Time (min)</b>	<b>= 0.56</b>	<b>+ 0.00</b>	<b>+ 0.00</b>	<b>=</b>	<b>0.56</b>
<b>Channel Flow</b>					
X sectional flow area (sqft)	= 0.00	0.00	0.00		
Wetted perimeter (ft)	= 0.00	0.00	0.00		
Channel slope (%)	= 0.00	0.00	0.00		
Manning's n-value	= 0.035	0.015	0.015		
Velocity (ft/s)	= 0.00	0.00	0.00		
Flow length (ft)	({0}) 0.0	0.0	0.0		
<b>Travel Time (min)</b>	<b>= 0.00</b>	<b>+ 0.00</b>	<b>+ 0.00</b>	<b>=</b>	<b>0.00</b>
<b>Total Travel Time, Tc .....</b>					<b>8.20 min</b>

# Hydrograph Report

Hydraflow Hydrographs Extension for AutoCAD® Civil 3D® 2015 by Autodesk, Inc. v10.4

Sunday, 11 / 6 / 2016

## Hyd. No. 2


### POST UNDETAINED DA1

Hydrograph type	= SCS Runoff	Peak discharge	= 4.033 cfs
Storm frequency	= 50 yrs	Time to peak	= 11.97 hrs
Time interval	= 2 min	Hyd. volume	= 9,236 cuft
Drainage area	= 1.030 ac	Curve number	= 73*
Basin Slope	= 0.0 %	Hydraulic length	= 0 ft
Tc method	= TR55	Time of conc. (Tc)	= 8.20 min
Total precip.	= 5.24 in	Distribution	= Type II
Storm duration	= 24 hrs	Shape factor	= 484

\* Composite (Area/CN) = [(0.100 x 58) + (0.320 x 71) + (0.160 x 78) + (0.050 x 70) + (0.400 x 77)] / 1.030

### POST UNDETAINED DA1

Hyd. No. 2 -- 50 Year

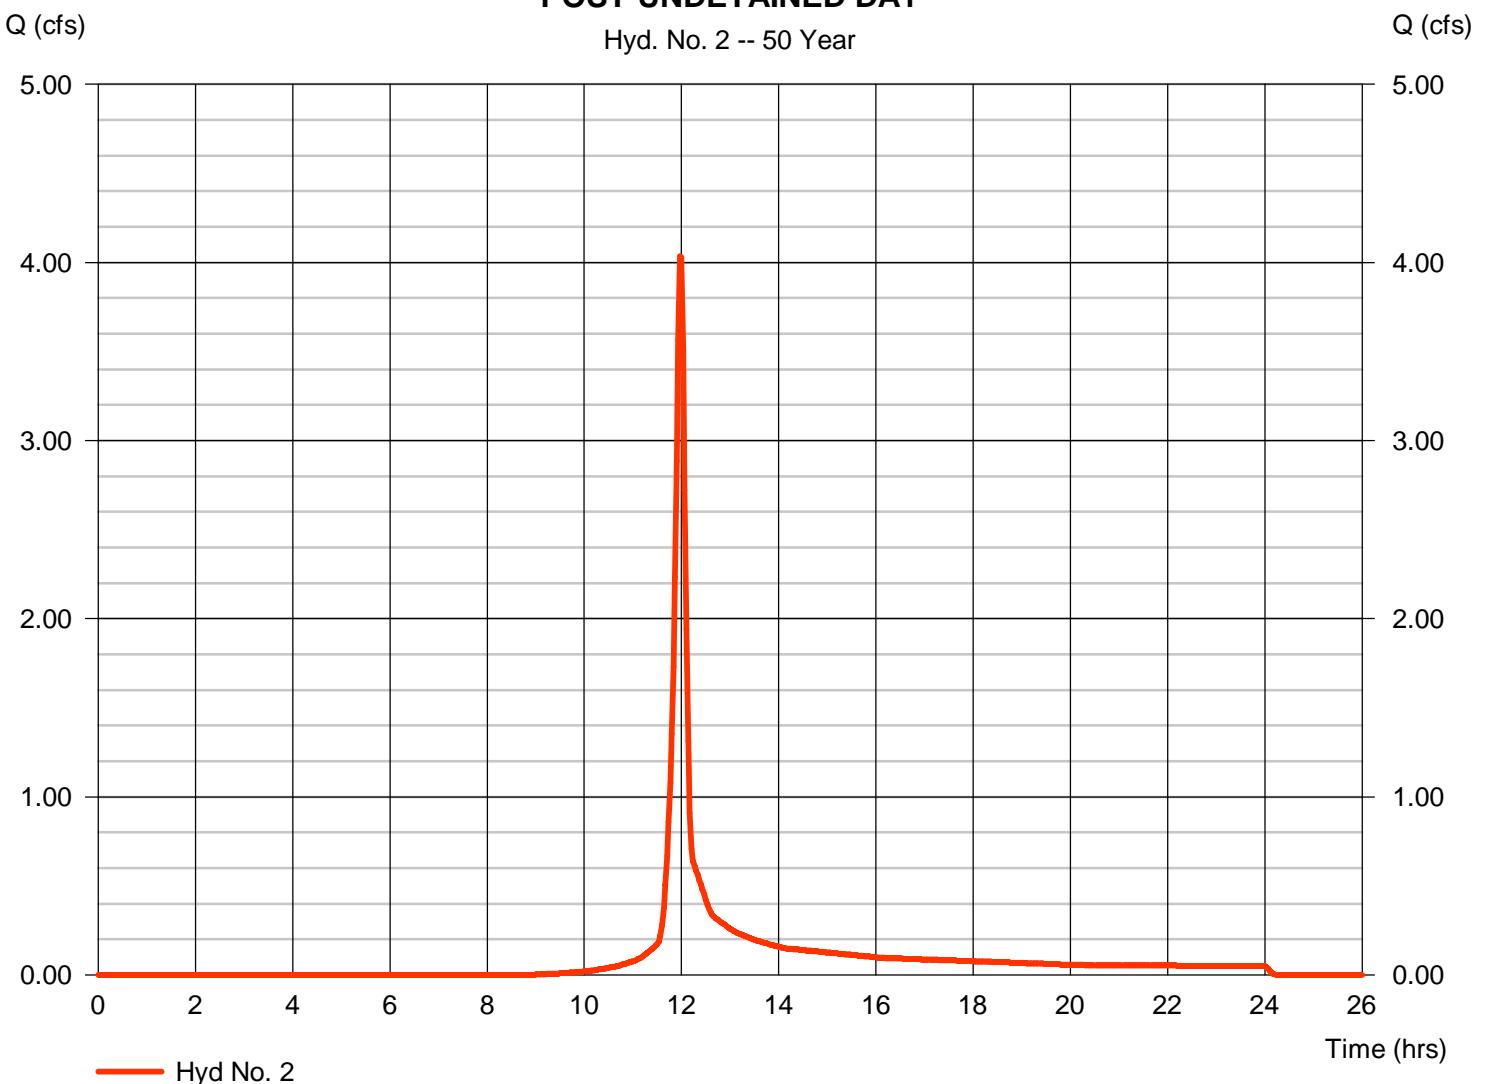

# TR55 Tc Worksheet

Hydraflow Hydrographs Extension for AutoCAD® Civil 3D® 2015 by Autodesk, Inc. v10.4

## Hyd. No. 2

POST UNDETAINED DA1

<u>Description</u>	<u>A</u>	<u>B</u>	<u>C</u>	<u>Totals</u>	
<b>Sheet Flow</b>					
Manning's n-value	= 0.240	0.011	0.011		
Flow length (ft)	= 50.0	0.0	0.0		
Two-year 24-hr precip. (in)	= 2.66	0.00	0.00		
Land slope (%)	= 3.00	0.00	0.00		
<b>Travel Time (min)</b>	<b>= 7.64</b>	<b>+ 0.00</b>	<b>+ 0.00</b>	<b>=</b>	<b>7.64</b>
<b>Shallow Concentrated Flow</b>					
Flow length (ft)	= 209.00	0.00	0.00		
Watercourse slope (%)	= 14.80	0.00	0.00		
Surface description	= Unpaved	Paved	Paved		
Average velocity (ft/s)	= 6.21	0.00	0.00		
<b>Travel Time (min)</b>	<b>= 0.56</b>	<b>+ 0.00</b>	<b>+ 0.00</b>	<b>=</b>	<b>0.56</b>
<b>Channel Flow</b>					
X sectional flow area (sqft)	= 0.00	0.00	0.00		
Wetted perimeter (ft)	= 0.00	0.00	0.00		
Channel slope (%)	= 0.00	0.00	0.00		
Manning's n-value	= 0.035	0.015	0.015		
Velocity (ft/s)	= 0.00	0.00	0.00		
Flow length (ft)	({0}) 0.0	0.0	0.0		
<b>Travel Time (min)</b>	<b>= 0.00</b>	<b>+ 0.00</b>	<b>+ 0.00</b>	<b>=</b>	<b>0.00</b>
<b>Total Travel Time, Tc .....</b>					<b>8.20 min</b>

# Hydrograph Report

Hydraflow Hydrographs Extension for AutoCAD® Civil 3D® 2015 by Autodesk, Inc. v10.4

Sunday, 11 / 6 / 2016

## Hyd. No. 3


### POST DETAINED DA1

Hydrograph type	= SCS Runoff	Peak discharge	= 1.291 cfs
Storm frequency	= 50 yrs	Time to peak	= 12.03 hrs
Time interval	= 2 min	Hyd. volume	= 3,624 cuft
Drainage area	= 0.330 ac	Curve number	= 80*
Basin Slope	= 0.0 %	Hydraulic length	= 0 ft
Tc method	= User	Time of conc. (Tc)	= 15.90 min
Total precip.	= 5.24 in	Distribution	= Type II
Storm duration	= 24 hrs	Shape factor	= 484

\* Composite (Area/CN) = [(0.100 x 89) + (0.030 x 91) + (0.010 x 58) + (0.080 x 71) + (0.110 x 78)] / 0.330

### POST DETAINED DA1

Hyd. No. 3 -- 50 Year

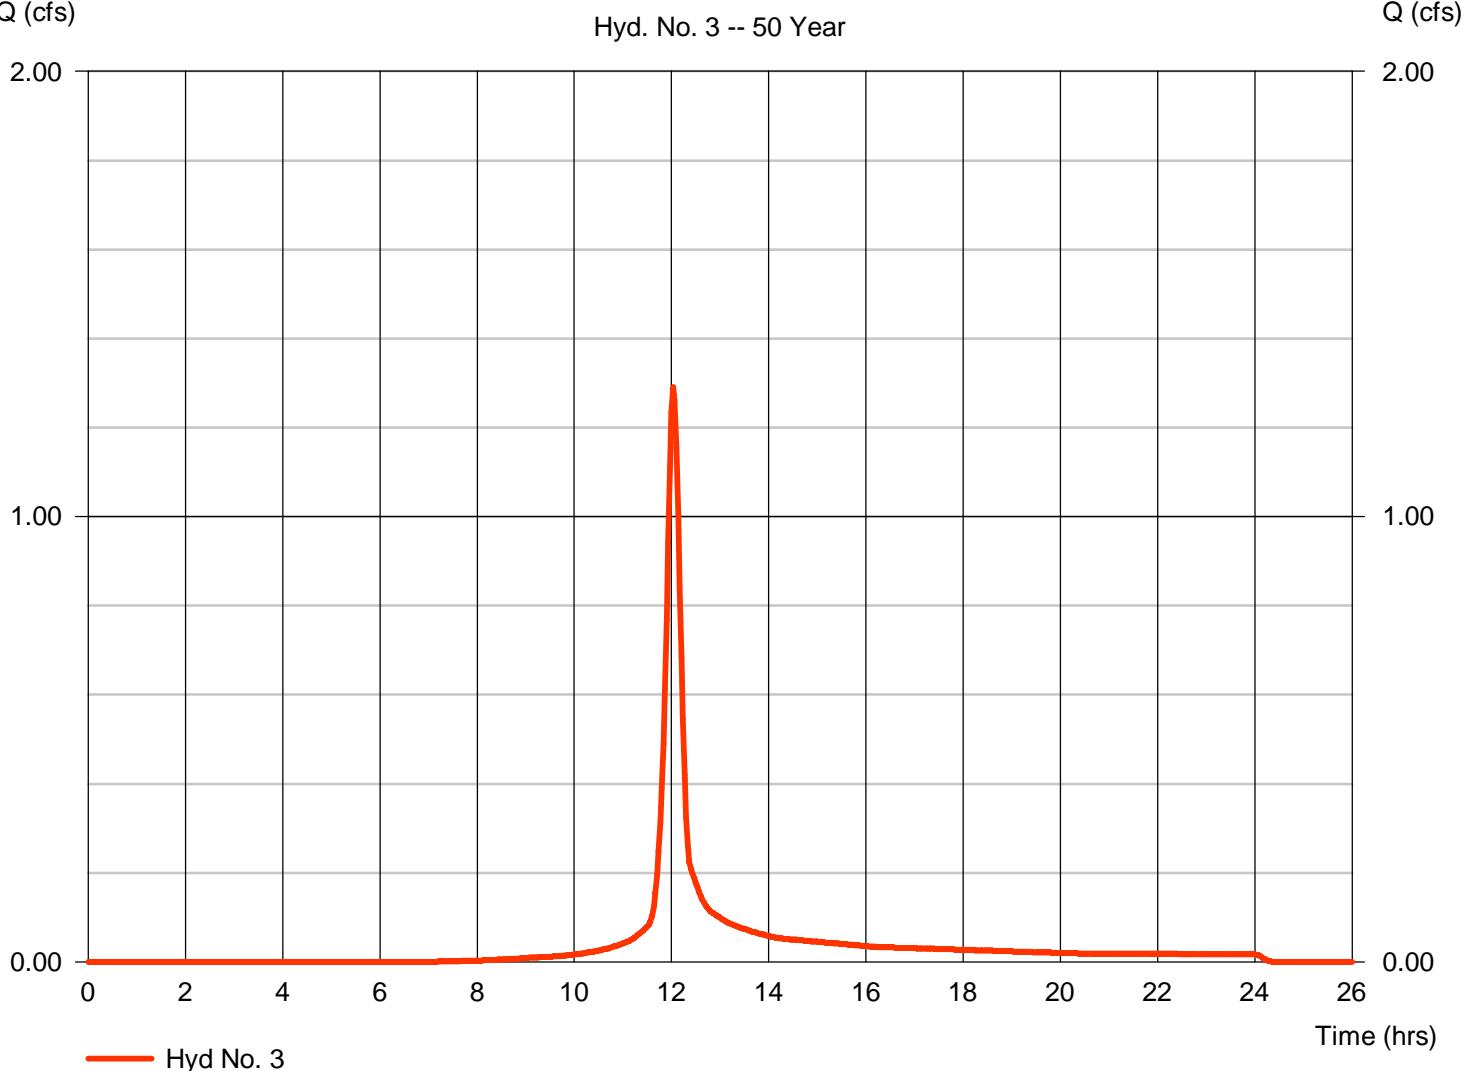

# Hydrograph Report


Hydraflow Hydrographs Extension for AutoCAD® Civil 3D® 2015 by Autodesk, Inc. v10.4

Sunday, 11 / 6 / 2016

## Hyd. No. 4

### VOLUME ABSTRACTION

Hydrograph type	= Diversion1	Peak discharge	= 1.112 cfs
Storm frequency	= 50 yrs	Time to peak	= 11.97 hrs
Time interval	= 2 min	Hyd. volume	= 948 cuft
Inflow hydrograph	= 3 - POST DETAINED DA1	2nd diverted hyd.	= 5
Diversion method	= First Flush Volume	Volume Up To	= 840.00 cuft

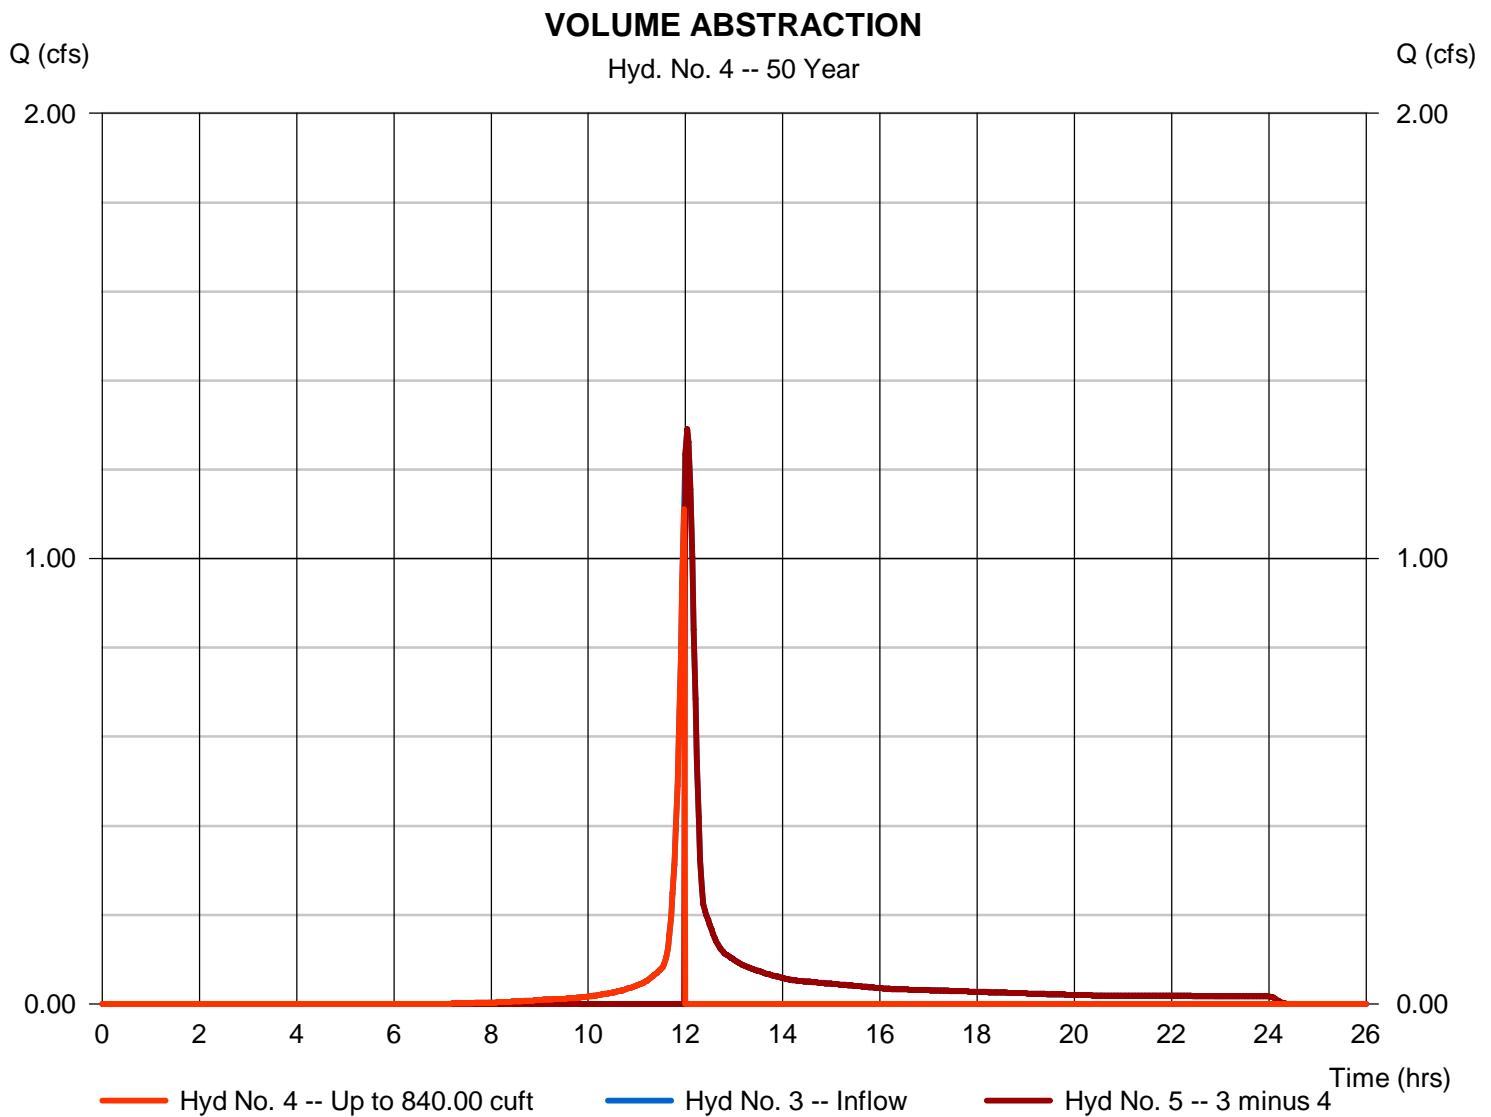

# Hydrograph Report


Hydraflow Hydrographs Extension for AutoCAD® Civil 3D® 2015 by Autodesk, Inc. v10.4

Sunday, 11 / 6 / 2016

## Hyd. No. 5

### POST AFTER BMP

Hydrograph type	= Diversion2	Peak discharge	= 1.291 cfs
Storm frequency	= 50 yrs	Time to peak	= 12.03 hrs
Time interval	= 2 min	Hyd. volume	= 2,677 cuft
Inflow hydrograph	= 3 - POST DETAINED DA1	2nd diverted hyd.	= 4
Diversion method	= First Flush Volume	Volume Up To	= 840.00 cuft

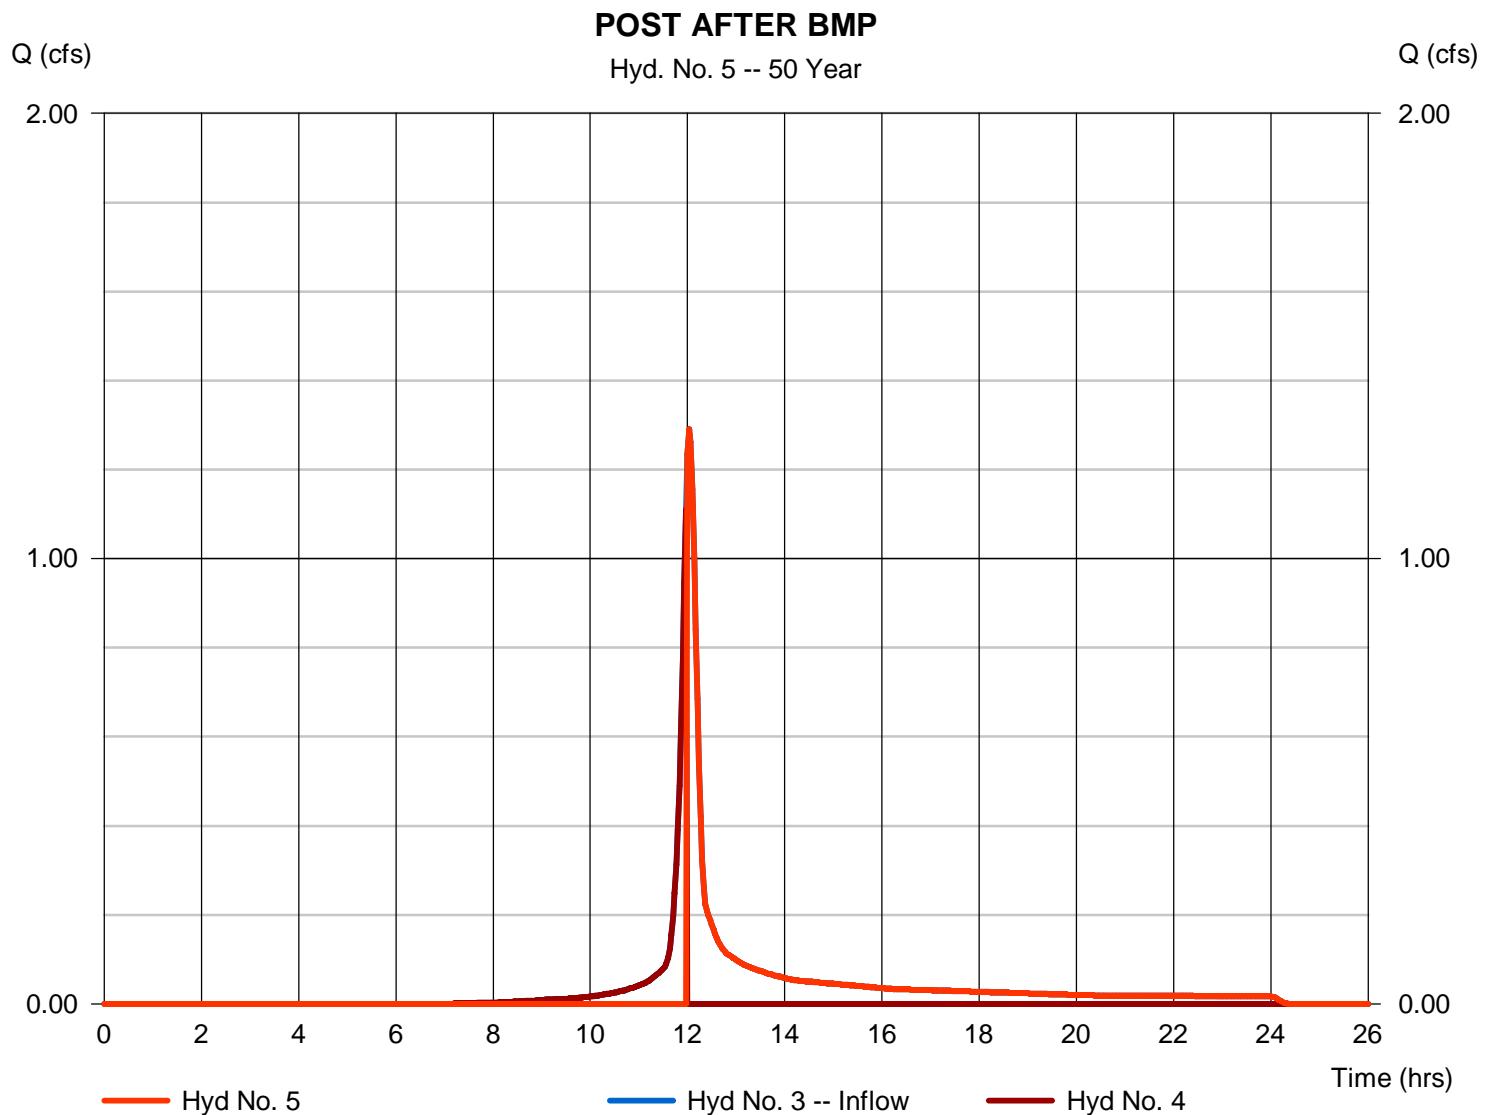

# Hydrograph Report


Hydraflow Hydrographs Extension for AutoCAD® Civil 3D® 2015 by Autodesk, Inc. v10.4

Sunday, 11 / 6 / 2016

## Hyd. No. 6

### POST AT POI DA1

Hydrograph type	= Combine	Peak discharge	= 5.263 cfs
Storm frequency	= 50 yrs	Time to peak	= 12.00 hrs
Time interval	= 2 min	Hyd. volume	= 11,912 cuft
Inflow hyds.	= 2, 5	Contrib. drain. area	= 1.030 ac

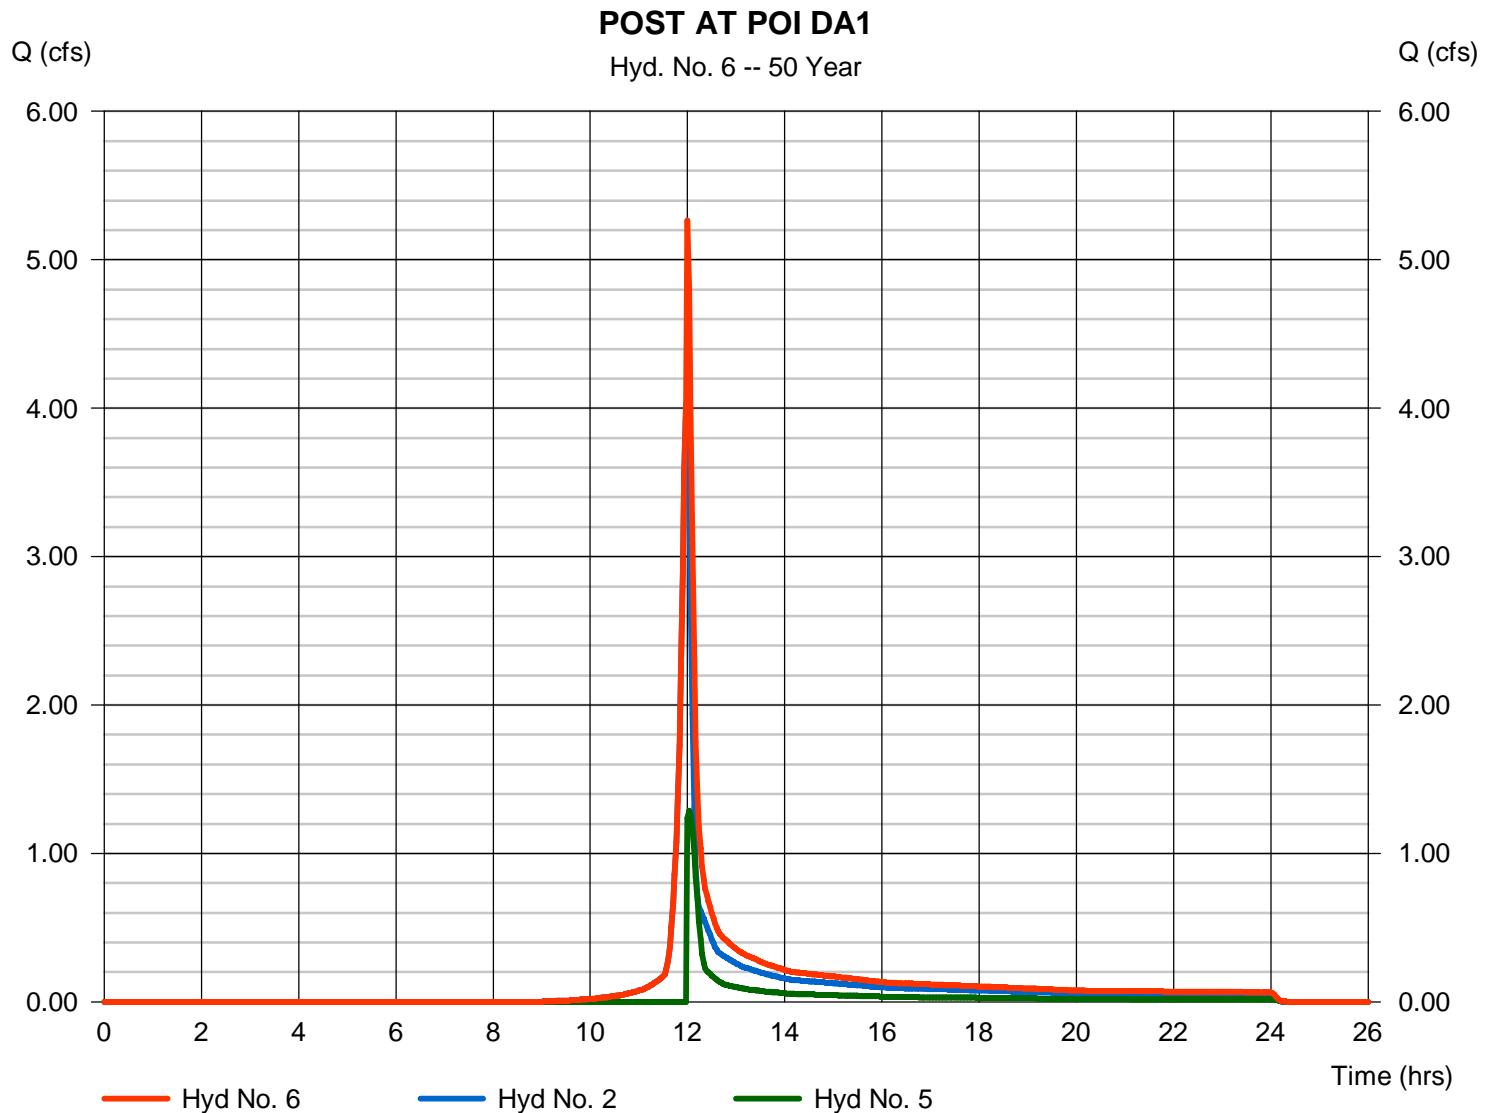

# Hydraflow Rainfall Report

Return Period (Yrs)	Intensity-Duration-Frequency Equation Coefficients (FHA)			
	B	D	E	(N/A)
1	39.9938	10.0000	0.8826	-----
2	46.8600	10.1000	0.8723	-----
3	0.0000	0.0000	0.0000	-----
5	47.4204	9.3000	0.8196	-----
10	26589.4199	47.3998	2.1160	-----
25	53942.1797	51.5998	2.2139	-----
50	69308.7266	52.6998	2.2395	-----
100	106327.6016	55.1997	2.2977	-----

File name: Charger IDF.IDF

$$\text{Intensity} = B / (T_c + D)^E$$


Return Period (Yrs)	Intensity Values (in/hr)											
	5 min	10	15	20	25	30	35	40	45	50	55	60
1	3.66	2.84	2.33	1.99	1.73	1.54	1.39	1.27	1.16	1.08	1.00	0.94
2	4.39	3.42	2.82	2.40	2.10	1.87	1.69	1.54	1.42	1.32	1.23	1.15
3	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
5	5.36	4.19	3.47	2.98	2.62	2.34	2.12	1.94	1.80	1.67	1.56	1.47
10	6.12	5.04	4.23	3.59	3.09	2.68	2.35	2.07	1.84	1.65	1.48	1.34
25	7.10	5.89	4.95	4.22	3.63	3.16	2.77	2.45	2.17	1.94	1.75	1.58
50	7.88	6.54	5.51	4.70	4.05	3.52	3.09	2.73	2.42	2.17	1.95	1.76
100	8.66	7.21	6.09	5.20	4.48	3.90	3.42	3.02	2.69	2.40	2.16	1.95

Tc = time in minutes. Values may exceed 60.

ESCGP-2\PPP\02 SCRO\07 PCSM\Attach 4 Stormwater Calcs\Charger\Hydraflow Rev 1\Charger Precip.pc

# Watershed Model Schematic

Hydraflow Hydrographs Extension for AutoCAD® Civil 3D® 2015 by Autodesk, Inc. v10.4

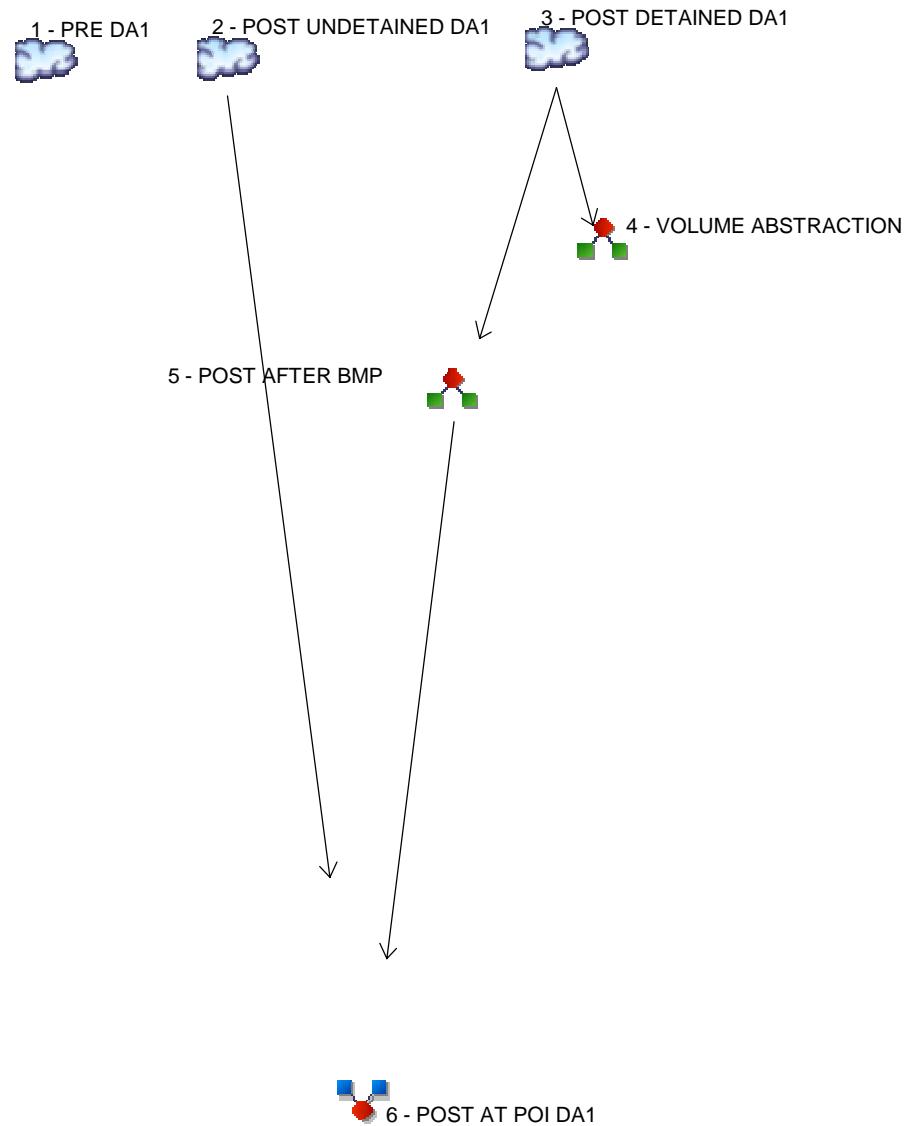

## Legend

### Hyd. Origin      Description

1	SCS Runoff	PRE DA1
2	SCS Runoff	POST UNDETAINED DA1
3	SCS Runoff	POST DETAINED DA1
4	Diversion1	VOLUME ABSTRACTION
5	Diversion2	POST AFTER BMP
6	Combine	POST AT POI DA1

# Hydrograph Return Period Recap

Hydraflow Hydrographs Extension for AutoCAD® Civil 3D® 2015 by Autodesk, Inc. v10.4

Hyd. No.	Hydrograph type (origin)	Inflow hyd(s)	Peak Outflow (cfs)								Hydrograph Description
			1-yr	2-yr	3-yr	5-yr	10-yr	25-yr	50-yr	100-yr	
1	SCS Runoff	----	----	----	----	----	----	----	----	6.505	PRE DA1
2	SCS Runoff	----	----	----	----	----	----	----	----	4.926	POST UNDETAINED DA1
3	SCS Runoff	----	----	----	----	----	----	----	----	1.534	POST DETAINED DA1
4	Diversion1	3	----	----	----	----	----	----	----	0.928	VOLUME ABSTRACTION
5	Diversion2	3	----	----	----	----	----	----	----	1.534	POST AFTER BMP
6	Combine	2, 5	----	----	----	----	----	----	----	6.368	POST AT POI DA1

# Hydrograph Summary Report

Hydraflow Hydrographs Extension for AutoCAD® Civil 3D® 2015 by Autodesk, Inc. v10.4

Hyd. No.	Hydrograph type (origin)	Peak flow (cfs)	Time interval (min)	Time to Peak (min)	Hyd. volume (cuft)	Inflow hyd(s)	Maximum elevation (ft)	Total strge used (cuft)	Hydrograph Description
1	SCS Runoff	6.505	2	718	14,880	-----	-----	-----	PRE DA1
2	SCS Runoff	4.926	2	718	11,269	-----	-----	-----	POST UNDETAINED DA1
3	SCS Runoff	1.534	2	722	4,322	-----	-----	-----	POST DETAINED DA1
4	Diversion1	0.928	2	714	897	3	-----	-----	VOLUME ABSTRACTION
5	Diversion2	1.534	2	722	3,424	3	-----	-----	POST AFTER BMP
6	Combine	6.368	2	720	14,694	2, 5	-----	-----	POST AT POI DA1

# Hydrograph Report

Hydraflow Hydrographs Extension for AutoCAD® Civil 3D® 2015 by Autodesk, Inc. v10.4


Sunday, 11 / 6 / 2016

## Hyd. No. 1

PRE DA1

Hydrograph type	= SCS Runoff	Peak discharge	= 6.505 cfs
Storm frequency	= 100 yrs	Time to peak	= 11.97 hrs
Time interval	= 2 min	Hyd. volume	= 14,880 cuft
Drainage area	= 1.360 ac	Curve number	= 73*
Basin Slope	= 0.0 %	Hydraulic length	= 0 ft
Tc method	= TR55	Time of conc. (Tc)	= 8.20 min
Total precip.	= 5.91 in	Distribution	= Type II
Storm duration	= 24 hrs	Shape factor	= 484

\* Composite (Area/CN) = [(0.100 x 58) + (0.150 x 71) + (0.040 x 78) + (0.010 x 55) + (0.390 x 70) + (0.670 x 77)] / 1.360

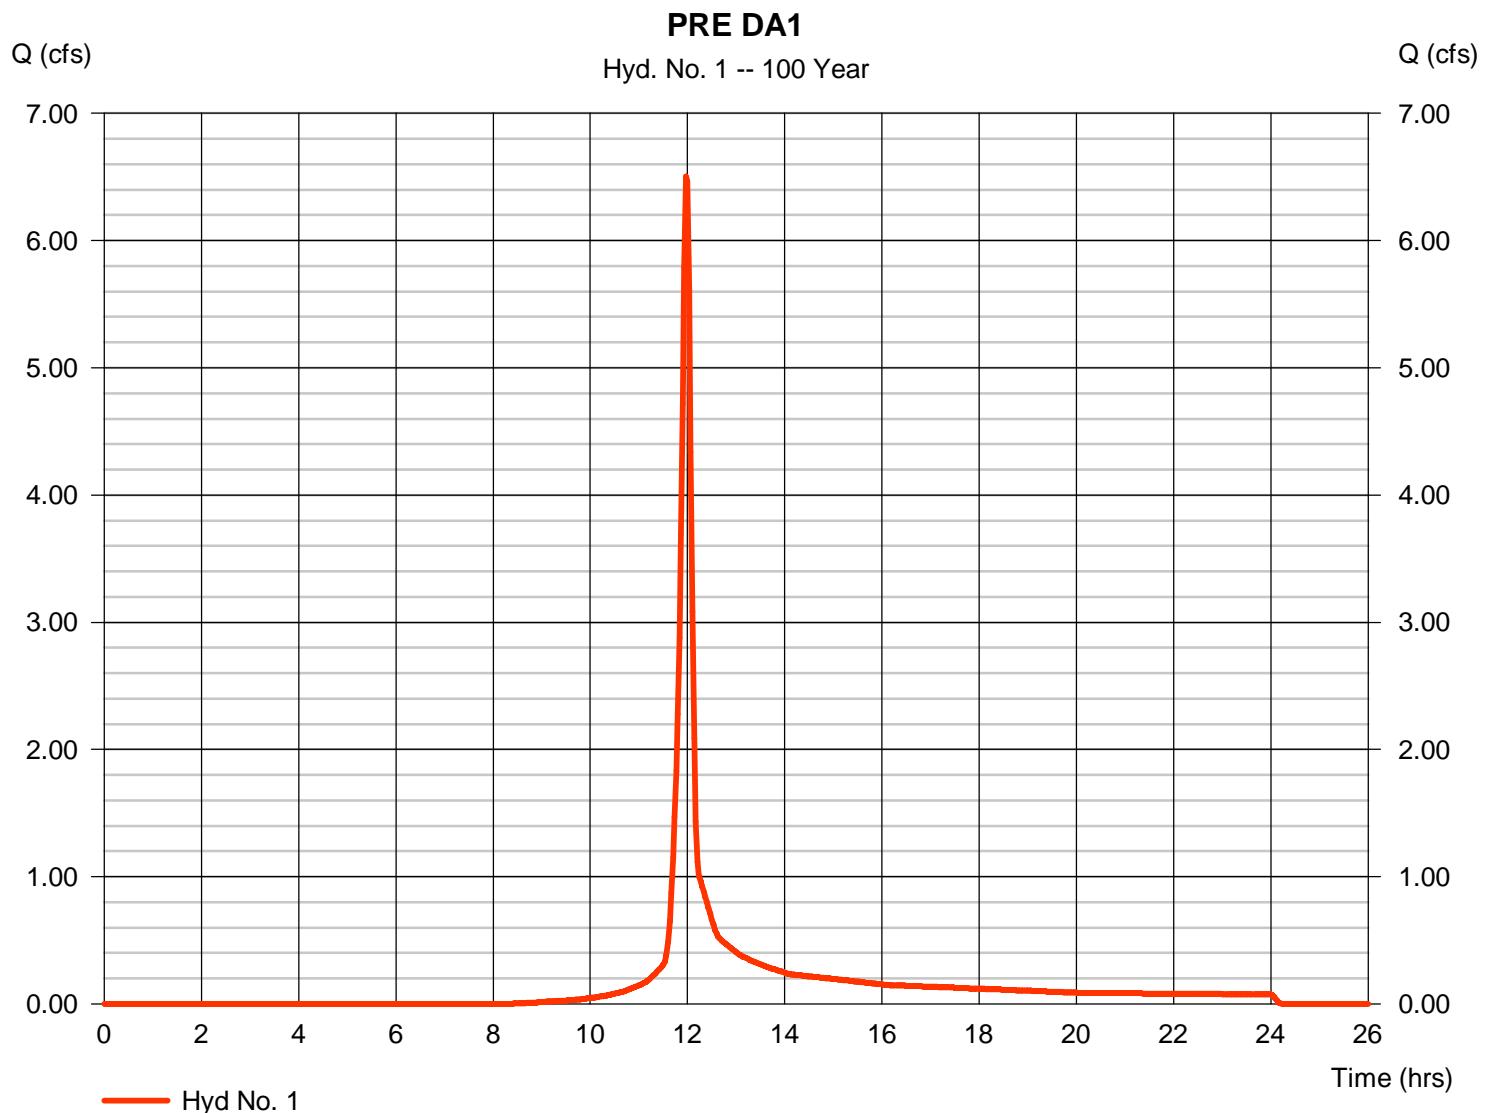

# TR55 Tc Worksheet

Hydraflow Hydrographs Extension for AutoCAD® Civil 3D® 2015 by Autodesk, Inc. v10.4

## Hyd. No. 1

PRE DA1

<u>Description</u>	<u>A</u>	<u>B</u>	<u>C</u>	<u>Totals</u>	
<b>Sheet Flow</b>					
Manning's n-value	= 0.240	0.011	0.011		
Flow length (ft)	= 50.0	0.0	0.0		
Two-year 24-hr precip. (in)	= 2.66	0.00	0.00		
Land slope (%)	= 3.00	0.00	0.00		
<b>Travel Time (min)</b>	<b>= 7.64</b>	<b>+ 0.00</b>	<b>+ 0.00</b>	<b>=</b>	<b>7.64</b>
<b>Shallow Concentrated Flow</b>					
Flow length (ft)	= 209.00	0.00	0.00		
Watercourse slope (%)	= 14.80	0.00	0.00		
Surface description	= Unpaved	Paved	Paved		
Average velocity (ft/s)	= 6.21	0.00	0.00		
<b>Travel Time (min)</b>	<b>= 0.56</b>	<b>+ 0.00</b>	<b>+ 0.00</b>	<b>=</b>	<b>0.56</b>
<b>Channel Flow</b>					
X sectional flow area (sqft)	= 0.00	0.00	0.00		
Wetted perimeter (ft)	= 0.00	0.00	0.00		
Channel slope (%)	= 0.00	0.00	0.00		
Manning's n-value	= 0.035	0.015	0.015		
Velocity (ft/s)	= 0.00	0.00	0.00		
Flow length (ft)	({0}) 0.0	0.0	0.0		
<b>Travel Time (min)</b>	<b>= 0.00</b>	<b>+ 0.00</b>	<b>+ 0.00</b>	<b>=</b>	<b>0.00</b>
<b>Total Travel Time, Tc .....</b>					<b>8.20 min</b>

# Hydrograph Report

## Hyd. No. 2


### POST UNDETAINED DA1

Hydrograph type	= SCS Runoff	Peak discharge	= 4.926 cfs
Storm frequency	= 100 yrs	Time to peak	= 11.97 hrs
Time interval	= 2 min	Hyd. volume	= 11,269 cuft
Drainage area	= 1.030 ac	Curve number	= 73*
Basin Slope	= 0.0 %	Hydraulic length	= 0 ft
Tc method	= TR55	Time of conc. (Tc)	= 8.20 min
Total precip.	= 5.91 in	Distribution	= Type II
Storm duration	= 24 hrs	Shape factor	= 484

\* Composite (Area/CN) = [(0.100 x 58) + (0.320 x 71) + (0.160 x 78) + (0.050 x 70) + (0.400 x 77)] / 1.030

### POST UNDETAINED DA1

Hyd. No. 2 -- 100 Year

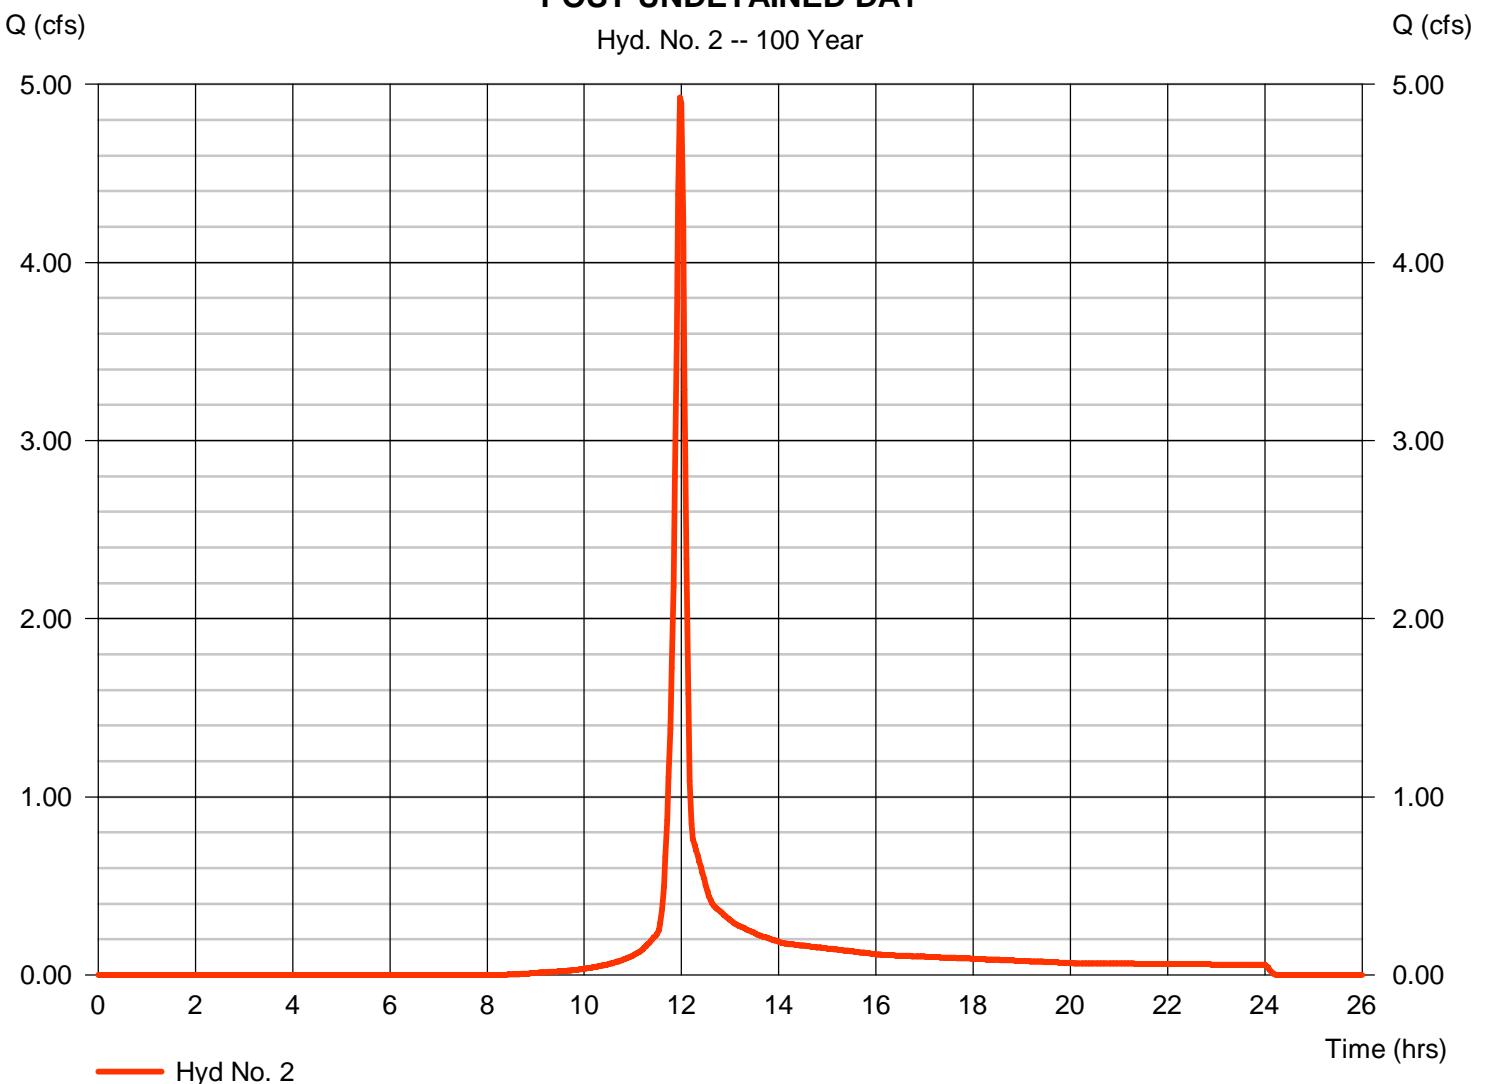

# TR55 Tc Worksheet

Hydraflow Hydrographs Extension for AutoCAD® Civil 3D® 2015 by Autodesk, Inc. v10.4

## Hyd. No. 2

POST UNDETAINED DA1

<u>Description</u>	<u>A</u>	<u>B</u>	<u>C</u>	<u>Totals</u>	
<b>Sheet Flow</b>					
Manning's n-value	= 0.240	0.011	0.011		
Flow length (ft)	= 50.0	0.0	0.0		
Two-year 24-hr precip. (in)	= 2.66	0.00	0.00		
Land slope (%)	= 3.00	0.00	0.00		
<b>Travel Time (min)</b>	<b>= 7.64</b>	<b>+ 0.00</b>	<b>+ 0.00</b>	<b>=</b>	<b>7.64</b>
<b>Shallow Concentrated Flow</b>					
Flow length (ft)	= 209.00	0.00	0.00		
Watercourse slope (%)	= 14.80	0.00	0.00		
Surface description	= Unpaved	Paved	Paved		
Average velocity (ft/s)	= 6.21	0.00	0.00		
<b>Travel Time (min)</b>	<b>= 0.56</b>	<b>+ 0.00</b>	<b>+ 0.00</b>	<b>=</b>	<b>0.56</b>
<b>Channel Flow</b>					
X sectional flow area (sqft)	= 0.00	0.00	0.00		
Wetted perimeter (ft)	= 0.00	0.00	0.00		
Channel slope (%)	= 0.00	0.00	0.00		
Manning's n-value	= 0.035	0.015	0.015		
Velocity (ft/s)	= 0.00	0.00	0.00		
Flow length (ft)	({0}) 0.0	0.0	0.0		
<b>Travel Time (min)</b>	<b>= 0.00</b>	<b>+ 0.00</b>	<b>+ 0.00</b>	<b>=</b>	<b>0.00</b>
<b>Total Travel Time, Tc .....</b>					<b>8.20 min</b>

# Hydrograph Report

Hydraflow Hydrographs Extension for AutoCAD® Civil 3D® 2015 by Autodesk, Inc. v10.4


Sunday, 11 / 6 / 2016

## Hyd. No. 3

### POST DETAINED DA1

Hydrograph type	= SCS Runoff	Peak discharge	= 1.534 cfs
Storm frequency	= 100 yrs	Time to peak	= 12.03 hrs
Time interval	= 2 min	Hyd. volume	= 4,322 cuft
Drainage area	= 0.330 ac	Curve number	= 80*
Basin Slope	= 0.0 %	Hydraulic length	= 0 ft
Tc method	= User	Time of conc. (Tc)	= 14.50 min
Total precip.	= 5.91 in	Distribution	= Type II
Storm duration	= 24 hrs	Shape factor	= 484

\* Composite (Area/CN) = [(0.100 x 89) + (0.030 x 91) + (0.010 x 58) + (0.080 x 71) + (0.110 x 78)] / 0.330

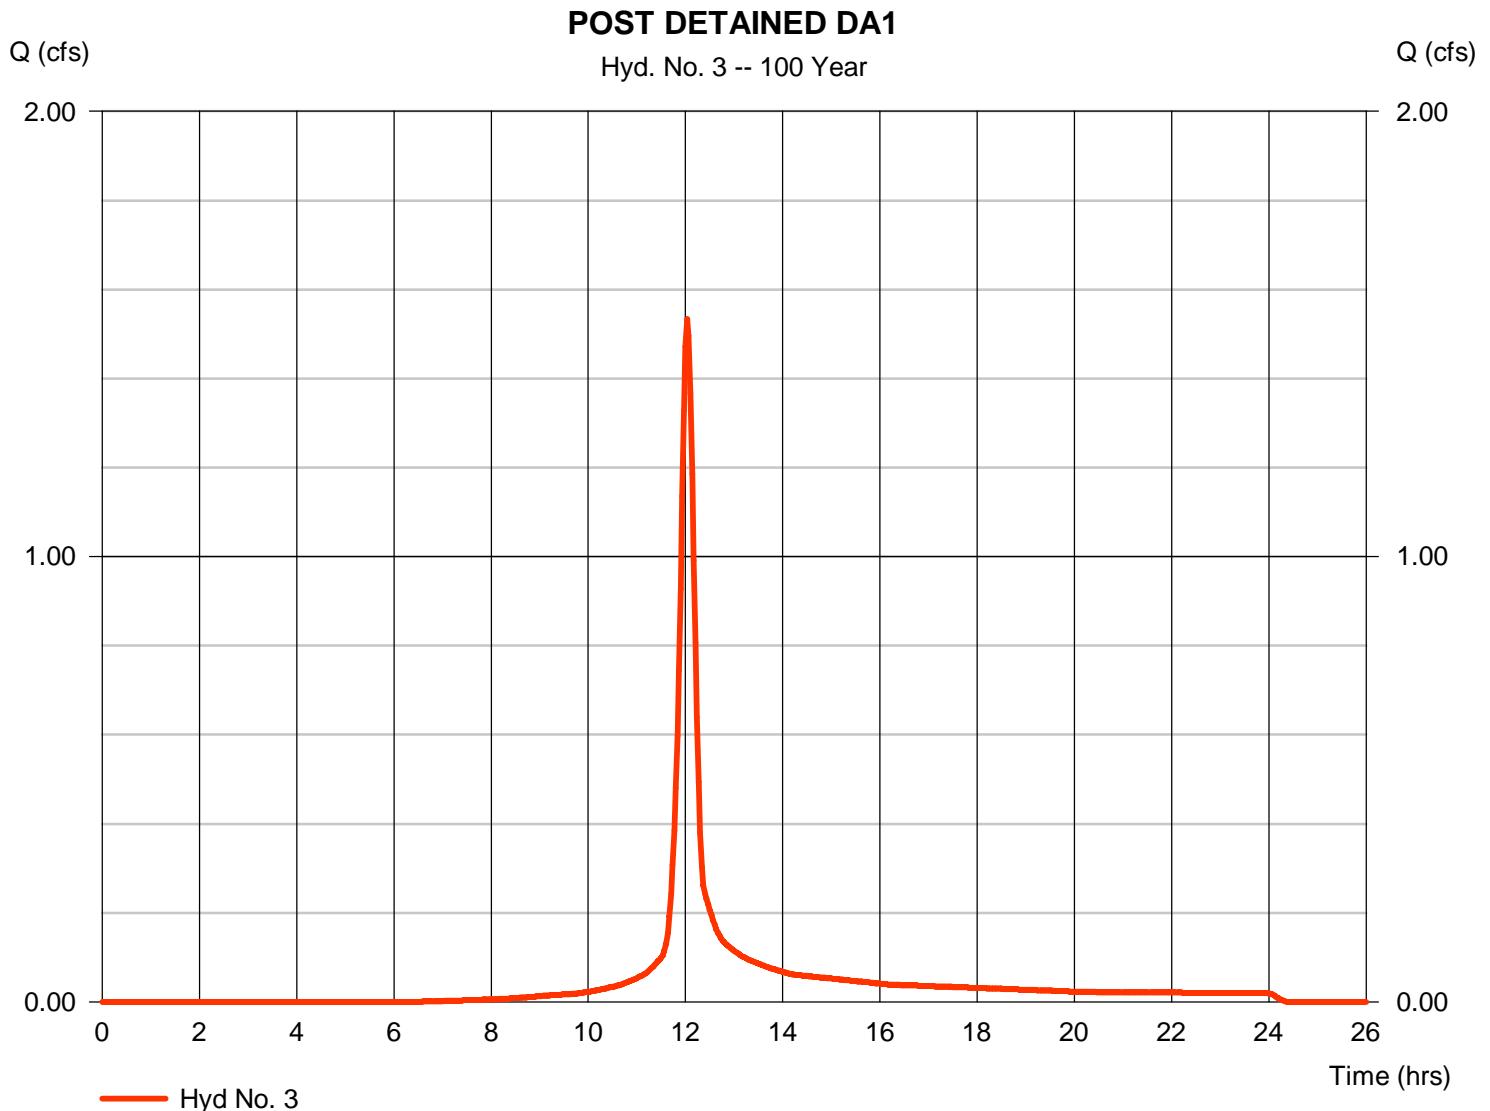

# Hydrograph Report


Hydraflow Hydrographs Extension for AutoCAD® Civil 3D® 2015 by Autodesk, Inc. v10.4

Sunday, 11 / 6 / 2016

## Hyd. No. 4

### VOLUME ABSTRACTION

Hydrograph type	= Diversion1	Peak discharge	= 0.928 cfs
Storm frequency	= 100 yrs	Time to peak	= 11.90 hrs
Time interval	= 2 min	Hyd. volume	= 897 cuft
Inflow hydrograph	= 3 - POST DETAINED DA1	2nd diverted hyd.	= 5
Diversion method	= First Flush Volume	Volume Up To	= 840.00 cuft

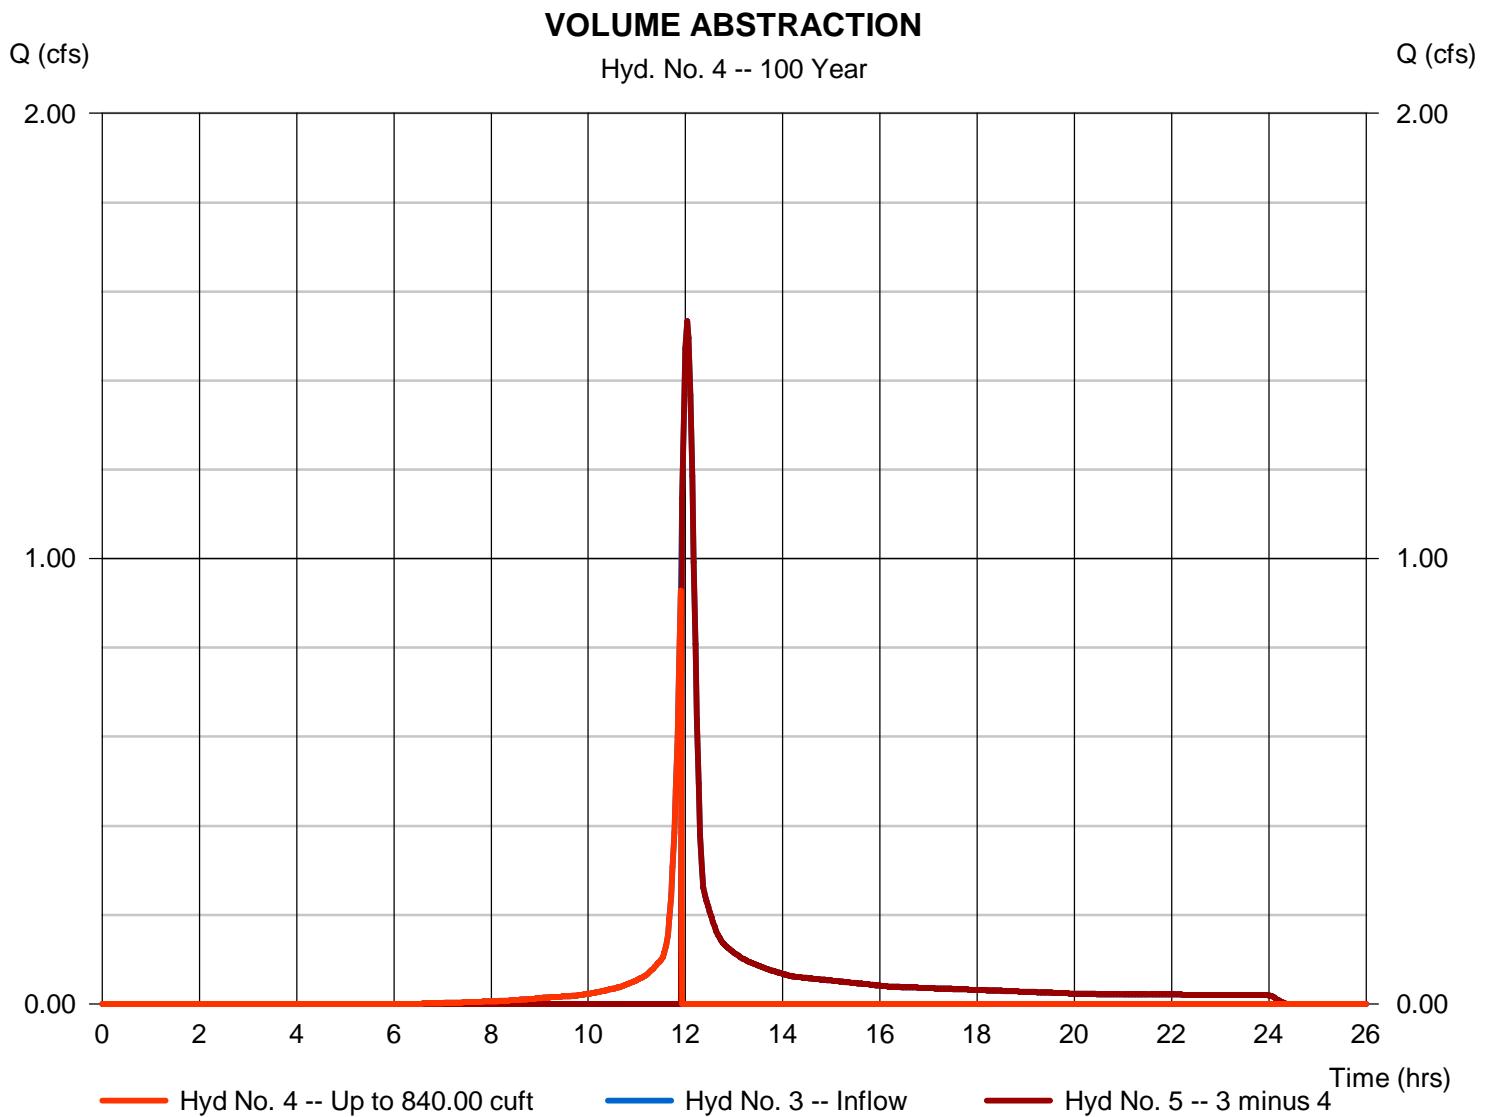

# Hydrograph Report


Hydraflow Hydrographs Extension for AutoCAD® Civil 3D® 2015 by Autodesk, Inc. v10.4

Sunday, 11 / 6 / 2016

## Hyd. No. 5

### POST AFTER BMP

Hydrograph type	= Diversion2	Peak discharge	= 1.534 cfs
Storm frequency	= 100 yrs	Time to peak	= 12.03 hrs
Time interval	= 2 min	Hyd. volume	= 3,424 cuft
Inflow hydrograph	= 3 - POST DETAINED DA1	2nd diverted hyd.	= 4
Diversion method	= First Flush Volume	Volume Up To	= 840.00 cuft

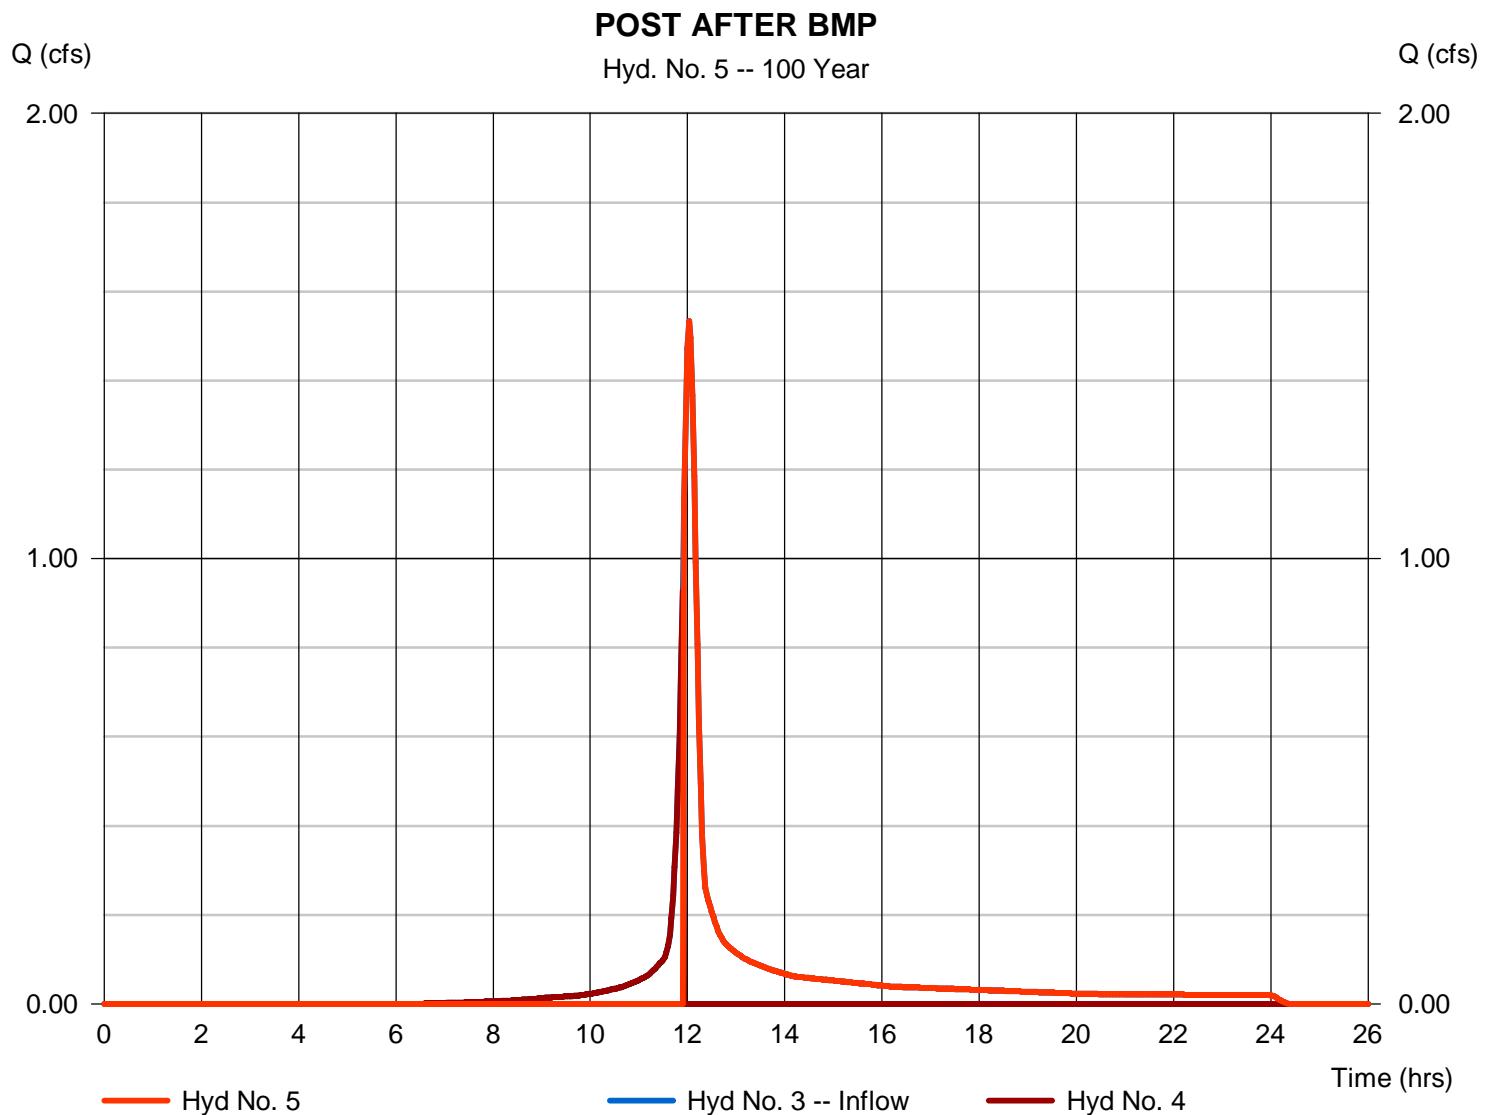

# Hydrograph Report


Hydraflow Hydrographs Extension for AutoCAD® Civil 3D® 2015 by Autodesk, Inc. v10.4

Sunday, 11 / 6 / 2016

## Hyd. No. 6

### POST AT POI DA1

Hydrograph type	= Combine	Peak discharge	= 6.368 cfs
Storm frequency	= 100 yrs	Time to peak	= 12.00 hrs
Time interval	= 2 min	Hyd. volume	= 14,694 cuft
Inflow hyds.	= 2, 5	Contrib. drain. area	= 1.030 ac

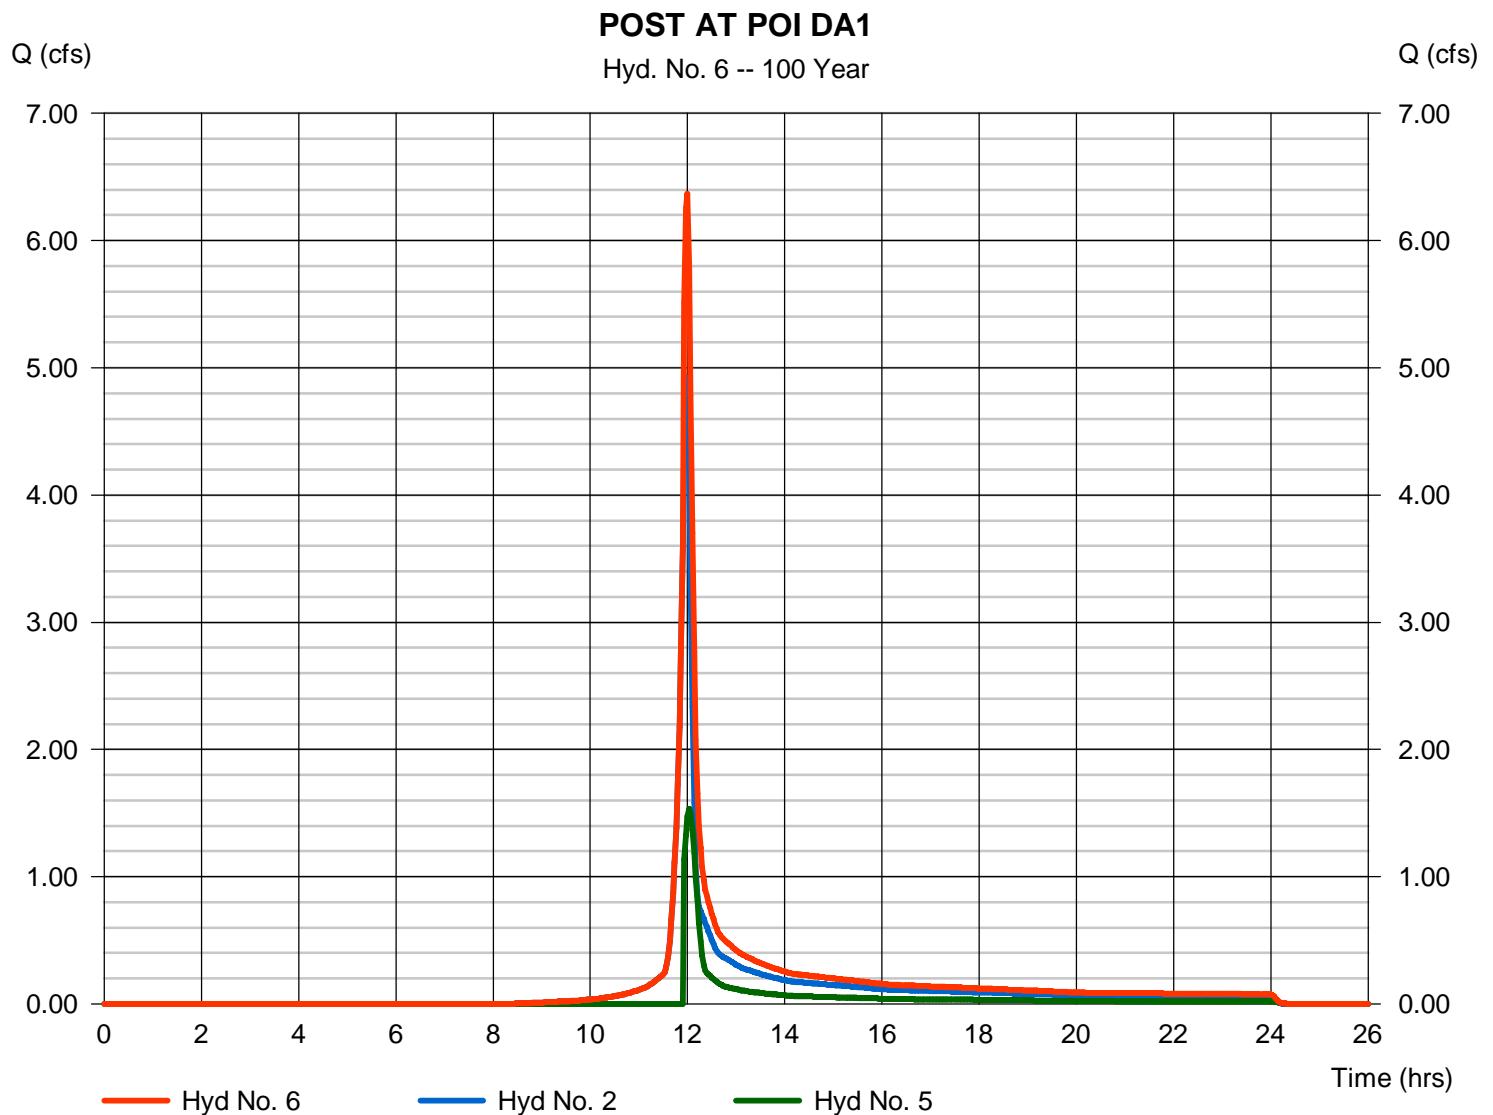

# Hydraflow Rainfall Report

Return Period (Yrs)	Intensity-Duration-Frequency Equation Coefficients (FHA)			
	B	D	E	(N/A)
1	39.9938	10.0000	0.8826	-----
2	46.8600	10.1000	0.8723	-----
3	0.0000	0.0000	0.0000	-----
5	47.4204	9.3000	0.8196	-----
10	26589.4199	47.3998	2.1160	-----
25	53942.1797	51.5998	2.2139	-----
50	69308.7266	52.6998	2.2395	-----
100	106327.6016	55.1997	2.2977	-----

File name: Charger IDF.IDF

$$\text{Intensity} = B / (T_c + D)^E$$


Return Period (Yrs)	Intensity Values (in/hr)											
	5 min	10	15	20	25	30	35	40	45	50	55	60
1	3.66	2.84	2.33	1.99	1.73	1.54	1.39	1.27	1.16	1.08	1.00	0.94
2	4.39	3.42	2.82	2.40	2.10	1.87	1.69	1.54	1.42	1.32	1.23	1.15
3	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
5	5.36	4.19	3.47	2.98	2.62	2.34	2.12	1.94	1.80	1.67	1.56	1.47
10	6.12	5.04	4.23	3.59	3.09	2.68	2.35	2.07	1.84	1.65	1.48	1.34
25	7.10	5.89	4.95	4.22	3.63	3.16	2.77	2.45	2.17	1.94	1.75	1.58
50	7.88	6.54	5.51	4.70	4.05	3.52	3.09	2.73	2.42	2.17	1.95	1.76
100	8.66	7.21	6.09	5.20	4.48	3.90	3.42	3.02	2.69	2.40	2.16	1.95

Tc = time in minutes. Values may exceed 60.

ESCGP-2\PPP\02 SCRO\07 PCSM\Attach 4 Stormwater Calcs\Charger\Hydraflow Rev 1\Charger Precip.pc

# Watershed Model Schematic

Hydraflow Hydrographs Extension for AutoCAD® Civil 3D® 2015 by Autodesk, Inc. v10.4

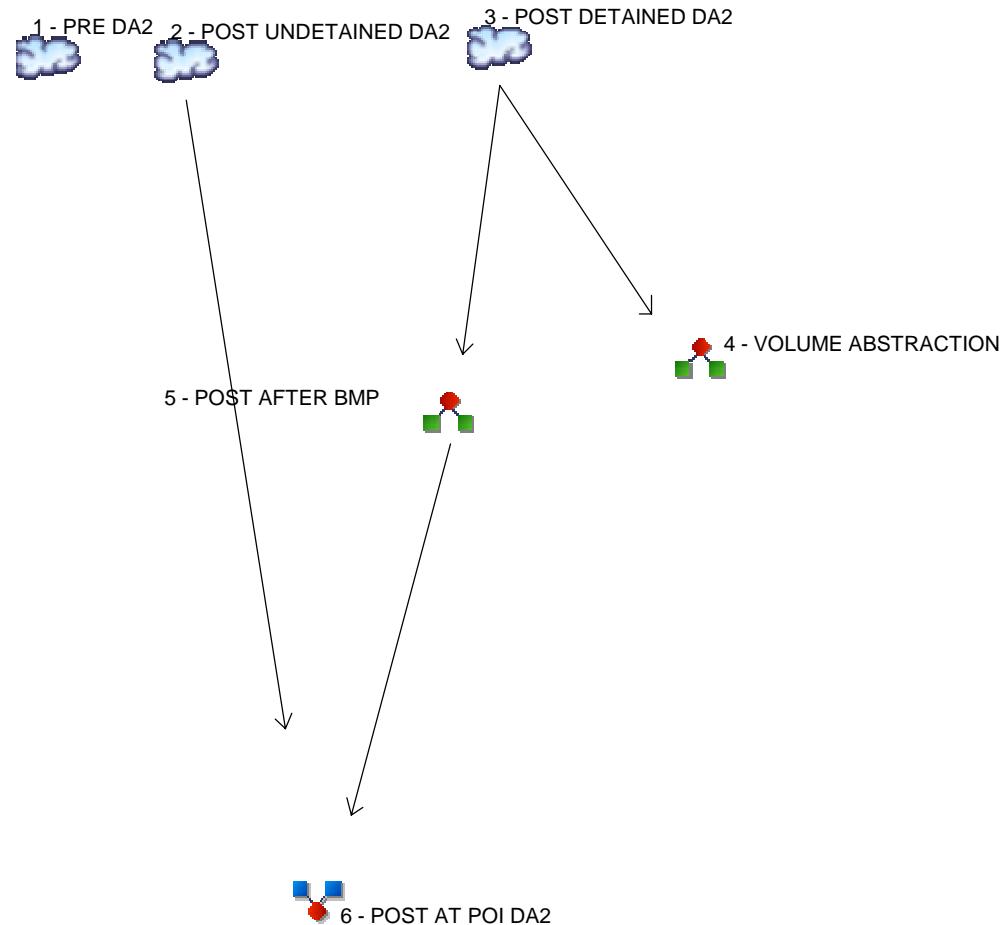

## Legend

### Hyd. Origin      Description

1	SCS Runoff	PRE DA2
2	SCS Runoff	POST UNDETAINED DA2
3	SCS Runoff	POST DETAINED DA2
4	Diversion1	VOLUME ABSTRACTION
5	Diversion2	POST AFTER BMP
6	Combine	POST AT POI DA2

# Hydrograph Return Period Recap

HydraFlow Hydrographs Extension for AutoCAD® Civil 3D® 2015 by Autodesk, Inc. v10.4

Hyd. No.	Hydrograph type (origin)	Inflow hyd(s)	Peak Outflow (cfs)								Hydrograph Description
			1-yr	2-yr	3-yr	5-yr	10-yr	25-yr	50-yr	100-yr	
1	SCS Runoff	-----	-----	0.126	-----	-----	0.302	-----	0.547	0.672	PRE DA2
2	SCS Runoff	-----	-----	0.099	-----	-----	0.222	-----	0.392	0.478	POST UNDETAINED DA2
3	SCS Runoff	-----	-----	0.058	-----	-----	0.122	-----	0.210	0.254	POST DETAINED DA2
4	Diversion1	3	-----	0.058	-----	-----	0.122	-----	0.210	0.186	VOLUME ABSTRACTION
5	Diversion2	3	-----	0.001	-----	-----	0.020	-----	0.209	0.254	POST AFTER BMP
6	Combine	2, 5	-----	0.099	-----	-----	0.222	-----	0.600	0.732	POST AT POI DA2

# Hydrograph Summary Report

Hydraflow Hydrographs Extension for AutoCAD® Civil 3D® 2015 by Autodesk, Inc. v10.4

Hyd. No.	Hydrograph type (origin)	Peak flow (cfs)	Time interval (min)	Time to Peak (min)	Hyd. volume (cuft)	Inflow hyd(s)	Maximum elevation (ft)	Total strge used (cuft)	Hydrograph Description
1	SCS Runoff	0.126	2	720	312	-----	-----	-----	PRE DA2
2	SCS Runoff	0.099	2	720	238	-----	-----	-----	POST UNDETAINED DA2
3	SCS Runoff	0.058	2	720	135	-----	-----	-----	POST DETAINED DA2
4	Diversion1	0.058	2	720	130	3	-----	-----	VOLUME ABSTRACTION
5	Diversion2	0.001	2	1352	5	3	-----	-----	POST AFTER BMP
6	Combine	0.099	2	720	244	2, 5	-----	-----	POST AT POI DA2
Charger DA2.gpw				Return Period: 2 Year				Sunday, 11 / 6 / 2016	

# Hydrograph Report

Hydraflow Hydrographs Extension for AutoCAD® Civil 3D® 2015 by Autodesk, Inc. v10.4


Sunday, 11 / 6 / 2016

## Hyd. No. 1

PRE DA2

Hydrograph type	= SCS Runoff	Peak discharge	= 0.126 cfs
Storm frequency	= 2 yrs	Time to peak	= 720 min
Time interval	= 2 min	Hyd. volume	= 312 cuft
Drainage area	= 0.150 ac	Curve number	= 71*
Basin Slope	= 0.0 %	Hydraulic length	= 0 ft
Tc method	= TR55	Time of conc. (Tc)	= 8.40 min
Total precip.	= 2.66 in	Distribution	= Type II
Storm duration	= 24 hrs	Shape factor	= 484

\* Composite (Area/CN) = [(0.090 x 71) + (0.060 x 70)] / 0.150

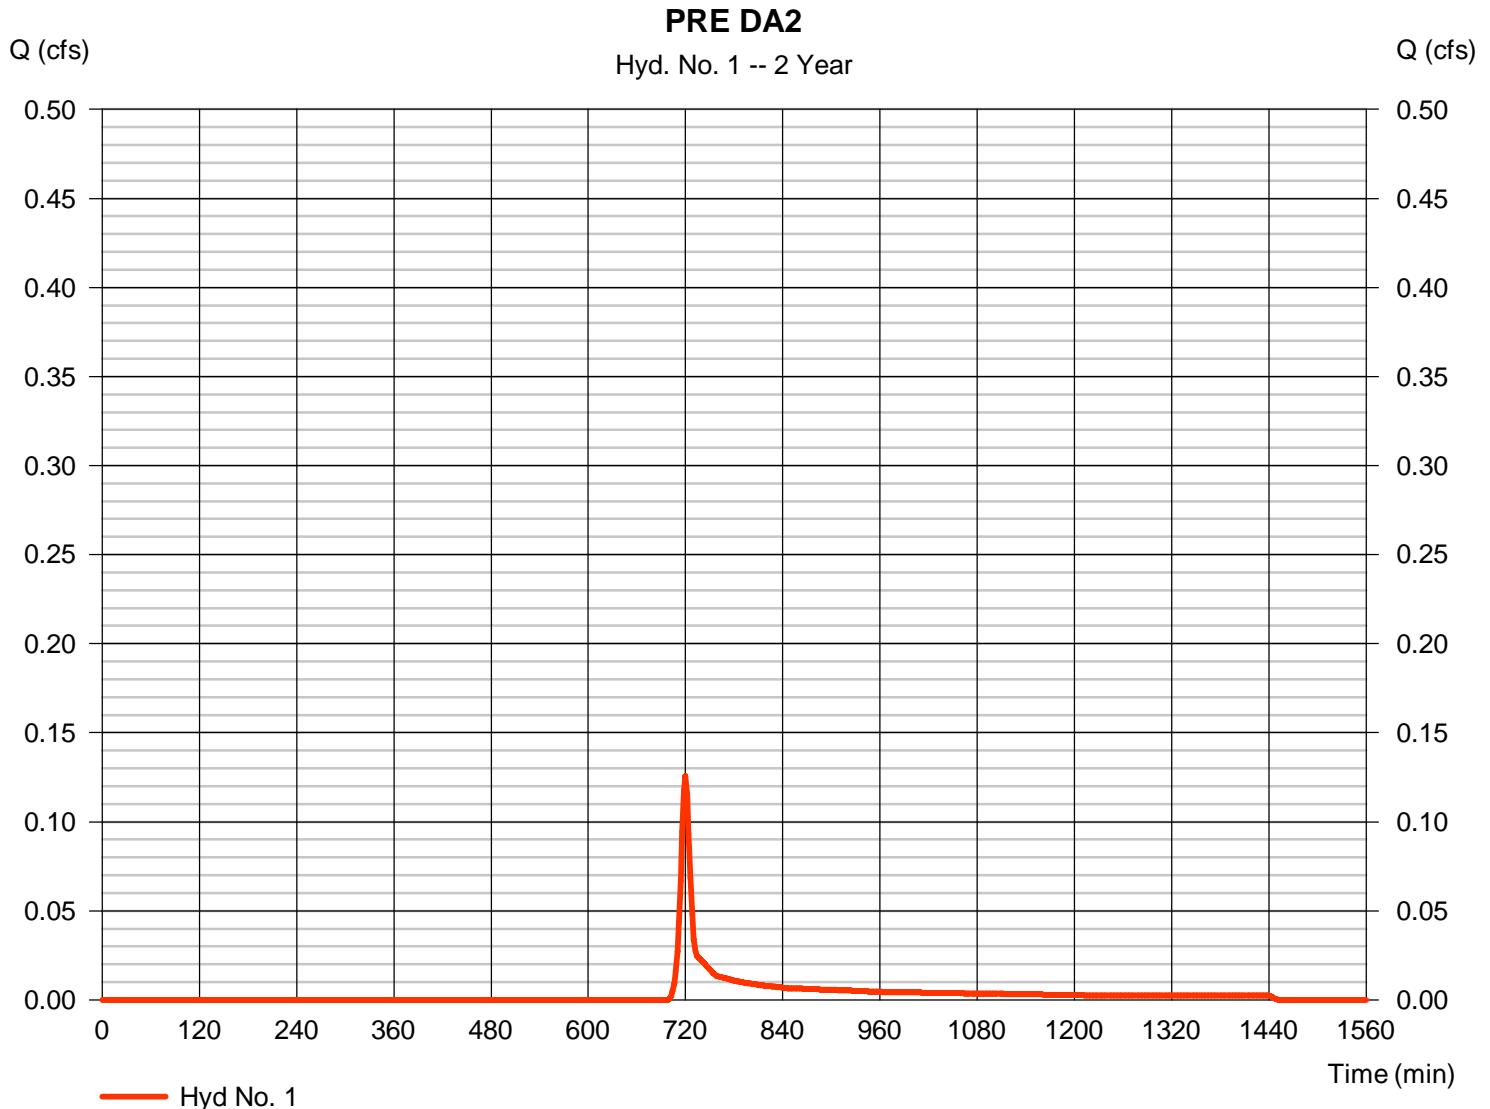

# TR55 Tc Worksheet

Hydraflow Hydrographs Extension for AutoCAD® Civil 3D® 2015 by Autodesk, Inc. v10.4

## Hyd. No. 1

PRE DA2

<u>Description</u>	<u>A</u>	<u>B</u>	<u>C</u>	<u>Totals</u>	
<b>Sheet Flow</b>					
Manning's n-value	= 0.240	0.011	0.011		
Flow length (ft)	= 50.0	0.0	0.0		
Two-year 24-hr precip. (in)	= 2.66	0.00	0.00		
Land slope (%)	= 2.50	0.00	0.00		
<b>Travel Time (min)</b>	<b>= 8.22</b>	<b>+ 0.00</b>	<b>+ 0.00</b>	<b>=</b>	<b>8.22</b>
<b>Shallow Concentrated Flow</b>					
Flow length (ft)	= 31.00	0.00	0.00		
Watercourse slope (%)	= 2.20	0.00	0.00		
Surface description	= Unpaved	Paved	Paved		
Average velocity (ft/s)	= 2.39	0.00	0.00		
<b>Travel Time (min)</b>	<b>= 0.22</b>	<b>+ 0.00</b>	<b>+ 0.00</b>	<b>=</b>	<b>0.22</b>
<b>Channel Flow</b>					
X sectional flow area (sqft)	= 0.00	0.00	0.00		
Wetted perimeter (ft)	= 0.00	0.00	0.00		
Channel slope (%)	= 0.00	0.00	0.00		
Manning's n-value	= 0.035	0.015	0.015		
Velocity (ft/s)	= 0.00	0.00	0.00		
Flow length (ft)	({0}) 0.0	0.0	0.0		
<b>Travel Time (min)</b>	<b>= 0.00</b>	<b>+ 0.00</b>	<b>+ 0.00</b>	<b>=</b>	<b>0.00</b>
<b>Total Travel Time, Tc .....</b>					<b>8.40 min</b>

# Hydrograph Report

Hydraflow Hydrographs Extension for AutoCAD® Civil 3D® 2015 by Autodesk, Inc. v10.4

Sunday, 11 / 6 / 2016

## Hyd. No. 2


### POST UNDETAINED DA2

Hydrograph type	= SCS Runoff	Peak discharge	= 0.099 cfs
Storm frequency	= 2 yrs	Time to peak	= 720 min
Time interval	= 2 min	Hyd. volume	= 238 cuft
Drainage area	= 0.100 ac	Curve number	= 73*
Basin Slope	= 0.0 %	Hydraulic length	= 0 ft
Tc method	= TR55	Time of conc. (Tc)	= 8.40 min
Total precip.	= 2.66 in	Distribution	= Type II
Storm duration	= 24 hrs	Shape factor	= 484

\* Composite (Area/CN) = [(0.010 x 89) + (0.070 x 71) + (0.020 x 70)] / 0.100

### POST UNDETAINED DA2

Hyd. No. 2 -- 2 Year

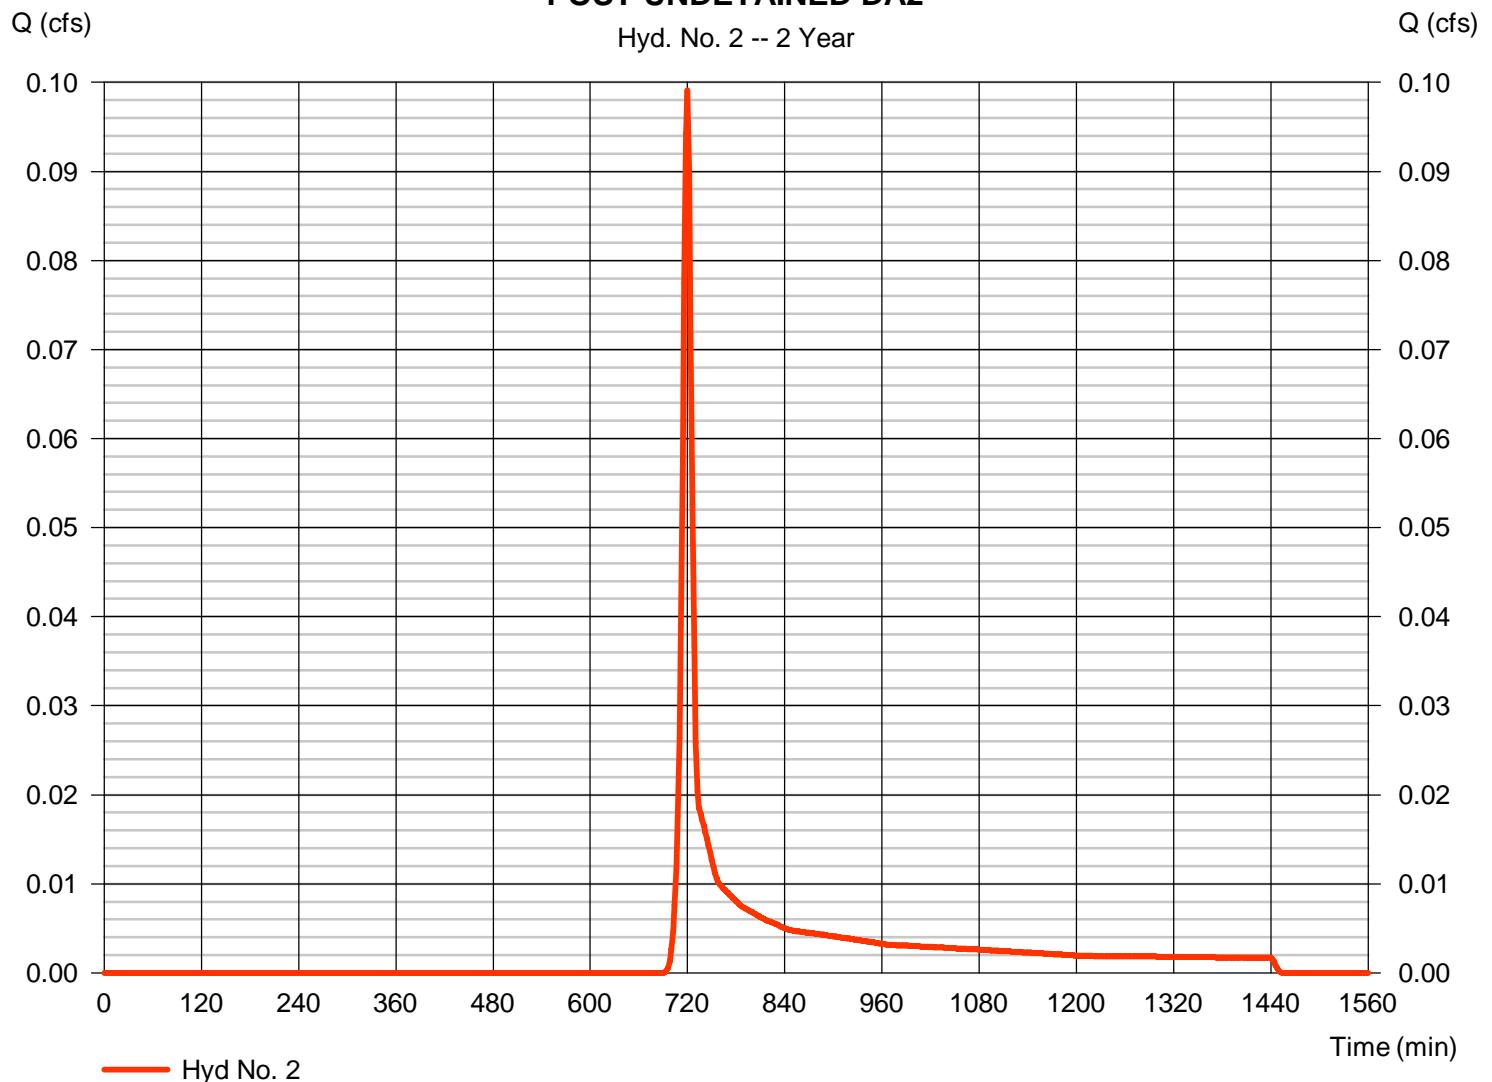

# TR55 Tc Worksheet

Hydraflow Hydrographs Extension for AutoCAD® Civil 3D® 2015 by Autodesk, Inc. v10.4

## Hyd. No. 2

POST UNDETAINED DA2

<u>Description</u>	<u>A</u>	<u>B</u>	<u>C</u>	<u>Totals</u>	
<b>Sheet Flow</b>					
Manning's n-value	= 0.240	0.011	0.011		
Flow length (ft)	= 50.0	0.0	0.0		
Two-year 24-hr precip. (in)	= 2.66	0.00	0.00		
Land slope (%)	= 2.50	0.00	0.00		
<b>Travel Time (min)</b>	<b>= 8.22</b>	<b>+ 0.00</b>	<b>+ 0.00</b>	<b>=</b>	<b>8.22</b>
<b>Shallow Concentrated Flow</b>					
Flow length (ft)	= 31.00	0.00	0.00		
Watercourse slope (%)	= 2.20	0.00	0.00		
Surface description	= Unpaved	Paved	Paved		
Average velocity (ft/s)	= 2.39	0.00	0.00		
<b>Travel Time (min)</b>	<b>= 0.22</b>	<b>+ 0.00</b>	<b>+ 0.00</b>	<b>=</b>	<b>0.22</b>
<b>Channel Flow</b>					
X sectional flow area (sqft)	= 0.00	0.00	0.00		
Wetted perimeter (ft)	= 0.00	0.00	0.00		
Channel slope (%)	= 0.00	0.00	0.00		
Manning's n-value	= 0.035	0.015	0.015		
Velocity (ft/s)	= 0.00	0.00	0.00		
Flow length (ft)	({0}) 0.0	0.0	0.0		
<b>Travel Time (min)</b>	<b>= 0.00</b>	<b>+ 0.00</b>	<b>+ 0.00</b>	<b>=</b>	<b>0.00</b>
<b>Total Travel Time, Tc .....</b>					<b>8.40 min</b>

# Hydrograph Report

Hydraflow Hydrographs Extension for AutoCAD® Civil 3D® 2015 by Autodesk, Inc. v10.4

Sunday, 11 / 6 / 2016

## Hyd. No. 3


### POST DETAINED DA2

Hydrograph type	= SCS Runoff	Peak discharge	= 0.058 cfs
Storm frequency	= 2 yrs	Time to peak	= 720 min
Time interval	= 2 min	Hyd. volume	= 135 cuft
Drainage area	= 0.050 ac	Curve number	= 75*
Basin Slope	= 0.0 %	Hydraulic length	= 0 ft
Tc method	= TR55	Time of conc. (Tc)	= 7.10 min
Total precip.	= 2.66 in	Distribution	= Type II
Storm duration	= 24 hrs	Shape factor	= 484

\* Composite (Area/CN) = [(0.010 x 89) + (0.040 x 71)] / 0.050

### POST DETAINED DA2

Hyd. No. 3 -- 2 Year

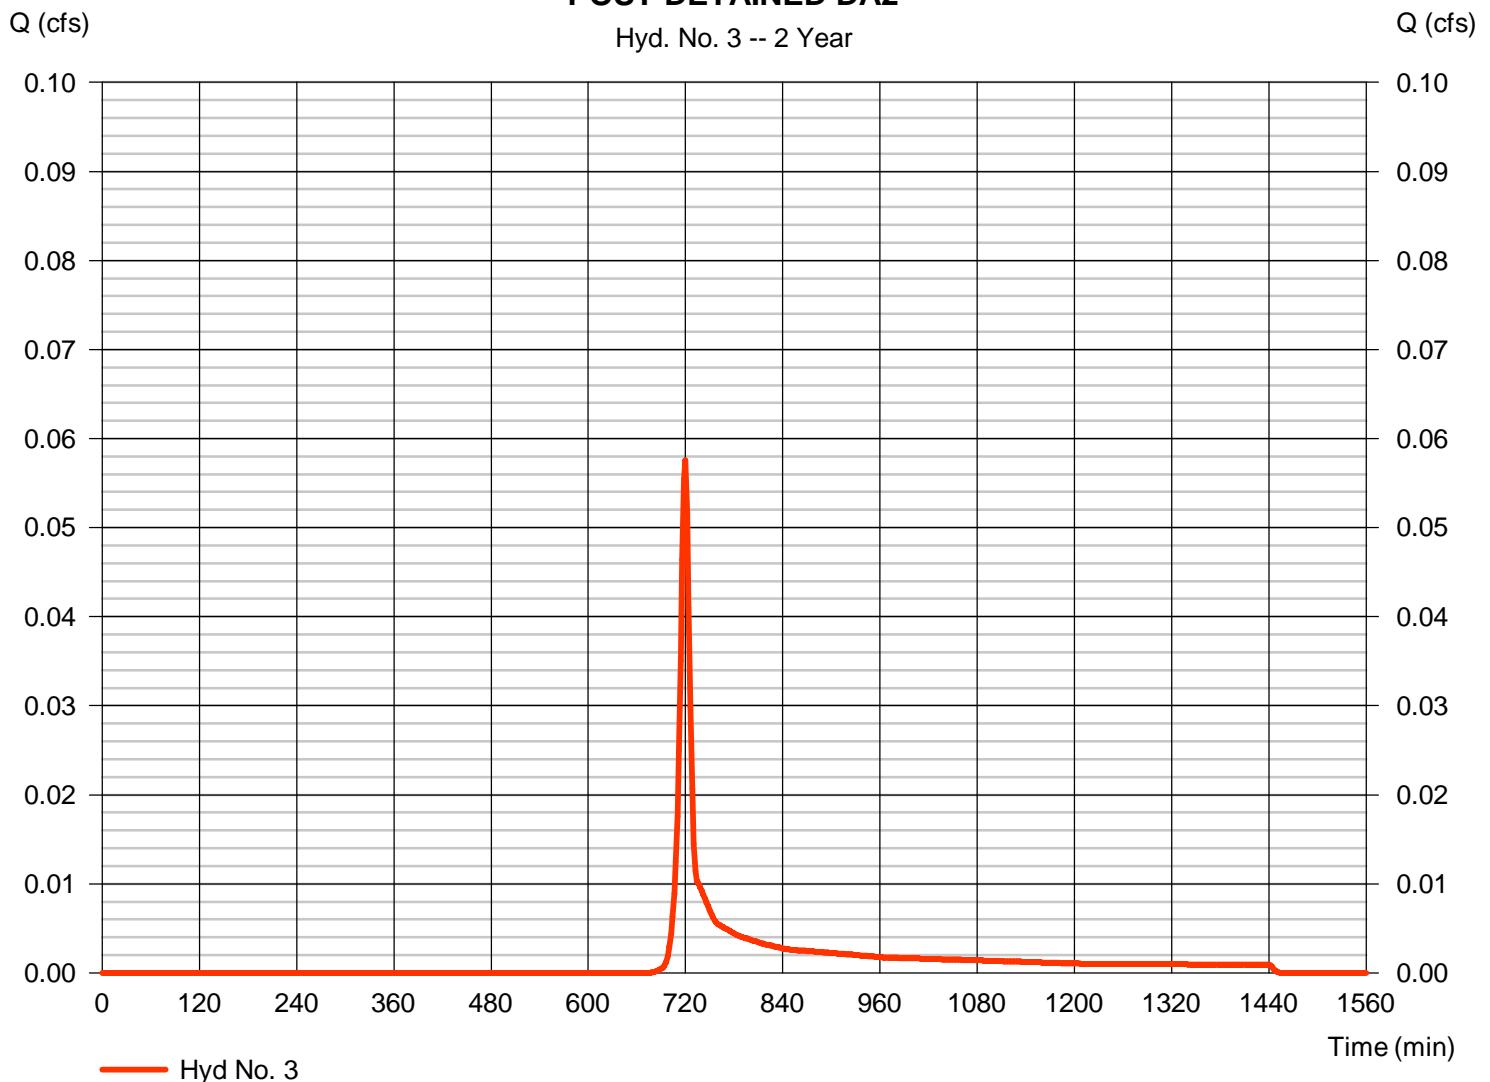

# TR55 Tc Worksheet

Hydraflow Hydrographs Extension for AutoCAD® Civil 3D® 2015 by Autodesk, Inc. v10.4

## Hyd. No. 3

POST DETAINED DA2

<u>Description</u>	<u>A</u>	<u>B</u>	<u>C</u>	<u>Totals</u>	
<b>Sheet Flow</b>					
Manning's n-value	= 0.240	0.011	0.011		
Flow length (ft)	= 40.0	0.0	0.0		
Two-year 24-hr precip. (in)	= 2.66	0.00	0.00		
Land slope (%)	= 2.50	0.00	0.00		
<b>Travel Time (min)</b>	<b>= 6.88</b>	<b>+ 0.00</b>	<b>+ 0.00</b>	<b>=</b>	<b>6.88</b>
<b>Shallow Concentrated Flow</b>					
Flow length (ft)	= 41.00	0.00	0.00		
Watercourse slope (%)	= 2.20	0.00	0.00		
Surface description	= Paved	Paved	Paved		
Average velocity (ft/s)	= 3.02	0.00	0.00		
<b>Travel Time (min)</b>	<b>= 0.23</b>	<b>+ 0.00</b>	<b>+ 0.00</b>	<b>=</b>	<b>0.23</b>
<b>Channel Flow</b>					
X sectional flow area (sqft)	= 0.00	0.00	0.00		
Wetted perimeter (ft)	= 0.00	0.00	0.00		
Channel slope (%)	= 0.00	0.00	0.00		
Manning's n-value	= 0.015	0.015	0.015		
Velocity (ft/s)	= 0.00	0.00	0.00		
Flow length (ft)	({0}) 0.0	0.0	0.0		
<b>Travel Time (min)</b>	<b>= 0.00</b>	<b>+ 0.00</b>	<b>+ 0.00</b>	<b>=</b>	<b>0.00</b>
<b>Total Travel Time, Tc .....</b>					<b>7.10 min</b>

# Hydrograph Report


Hydraflow Hydrographs Extension for AutoCAD® Civil 3D® 2015 by Autodesk, Inc. v10.4

Sunday, 11 / 6 / 2016

## Hyd. No. 4

### VOLUME ABSTRACTION

Hydrograph type	= Diversion1	Peak discharge	= 0.058 cfs
Storm frequency	= 2 yrs	Time to peak	= 720 min
Time interval	= 2 min	Hyd. volume	= 130 cuft
Inflow hydrograph	= 3 - POST DETAINED DA2	2nd diverted hyd.	= 5
Diversion method	= First Flush Volume	Volume Up To	= 130.00 cuft

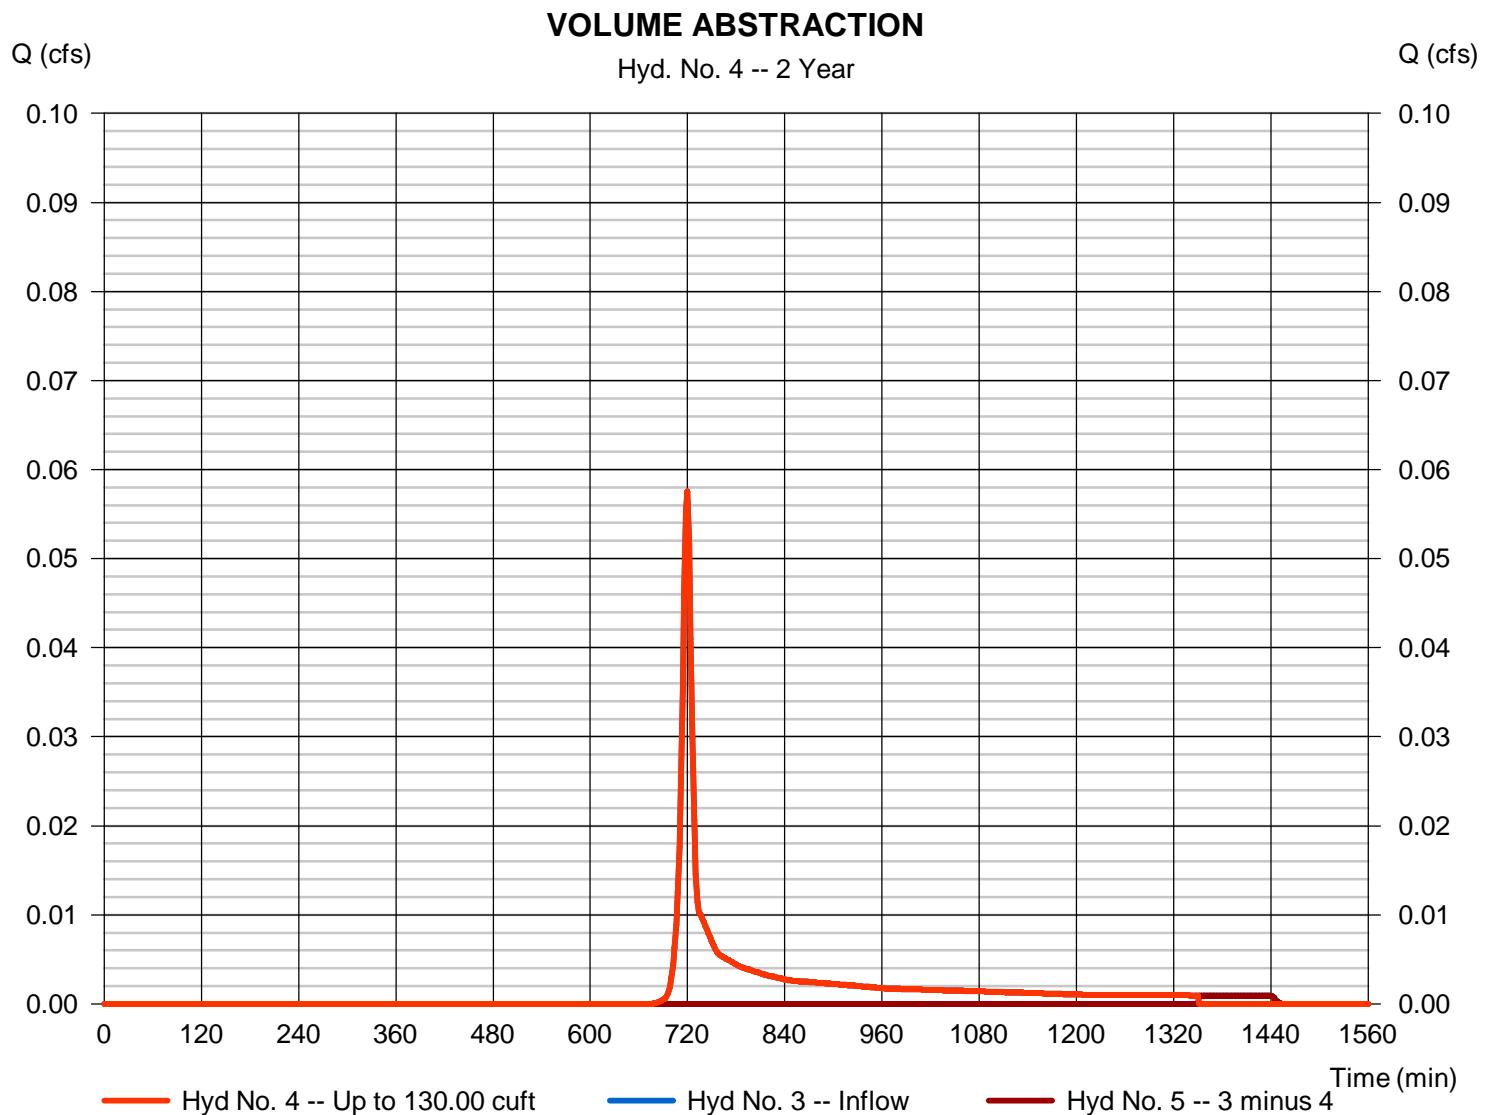

# Hydrograph Report


Hydraflow Hydrographs Extension for AutoCAD® Civil 3D® 2015 by Autodesk, Inc. v10.4

Sunday, 11 / 6 / 2016

## Hyd. No. 5

### POST AFTER BMP

Hydrograph type	= Diversion2	Peak discharge	= 0.001 cfs
Storm frequency	= 2 yrs	Time to peak	= 1352 min
Time interval	= 2 min	Hyd. volume	= 5 cuft
Inflow hydrograph	= 3 - POST DETAINED DA2	2nd diverted hyd.	= 4
Diversion method	= First Flush Volume	Volume Up To	= 130.00 cuft

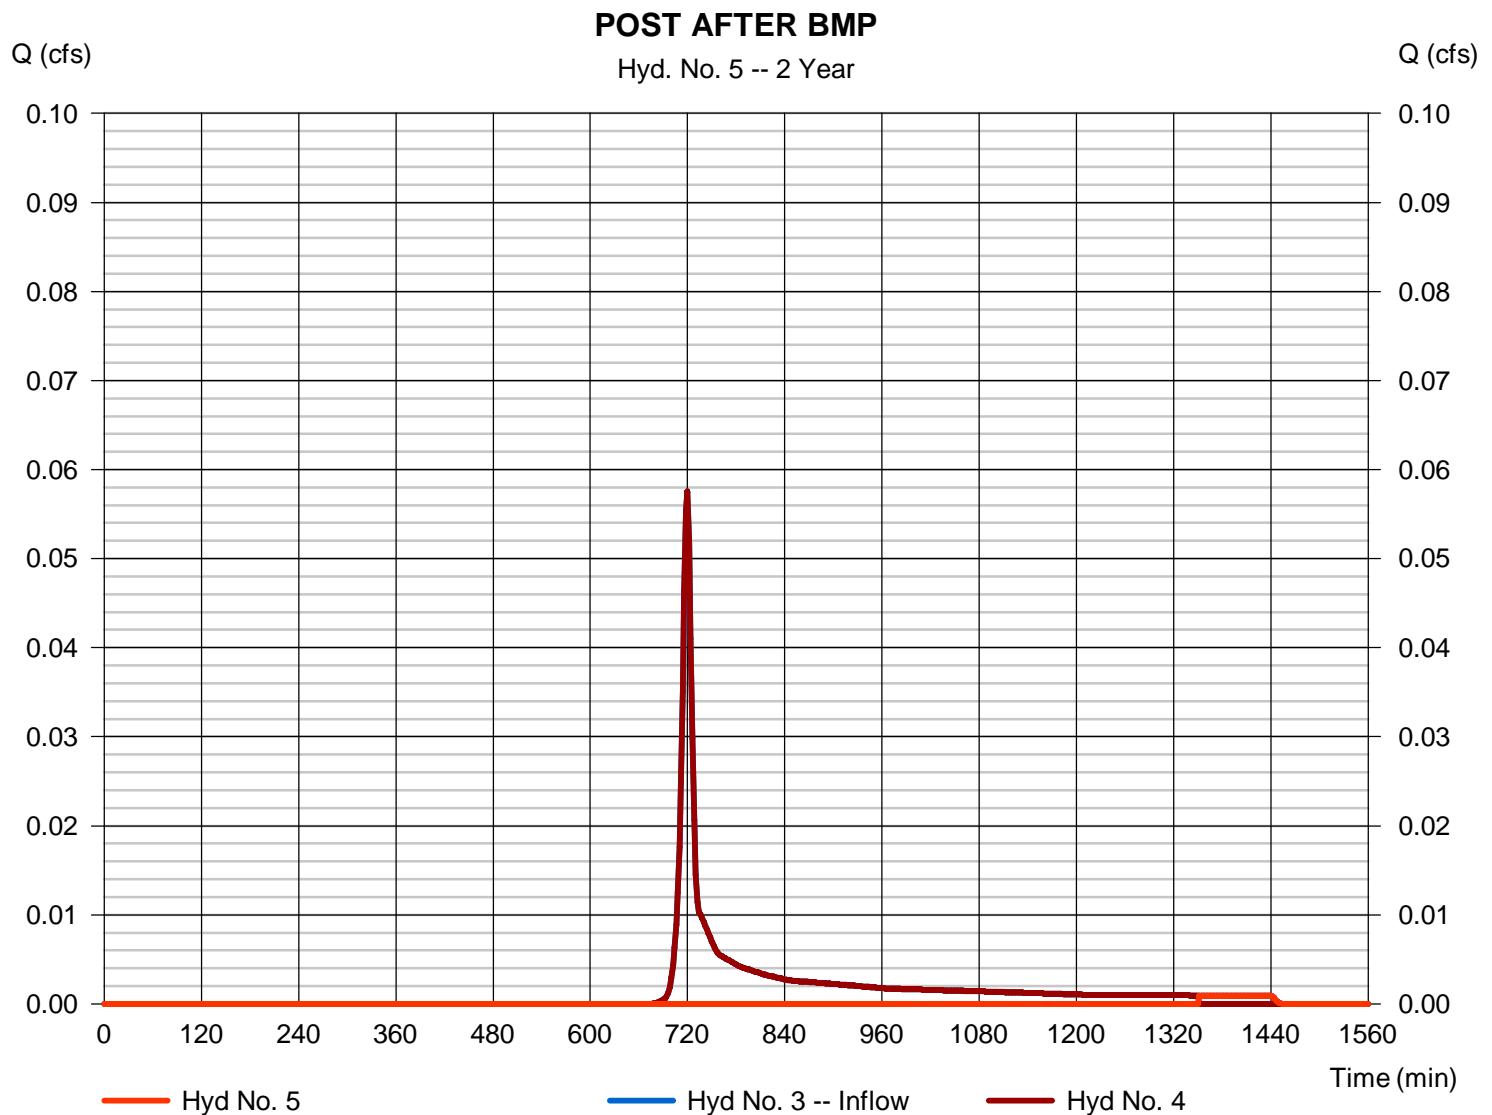

# Hydrograph Report


Hydraflow Hydrographs Extension for AutoCAD® Civil 3D® 2015 by Autodesk, Inc. v10.4

Sunday, 11 / 6 / 2016

## Hyd. No. 6

### POST AT POI DA2

Hydrograph type	= Combine	Peak discharge	= 0.099 cfs
Storm frequency	= 2 yrs	Time to peak	= 720 min
Time interval	= 2 min	Hyd. volume	= 244 cuft
Inflow hyds.	= 2, 5	Contrib. drain. area	= 0.100 ac

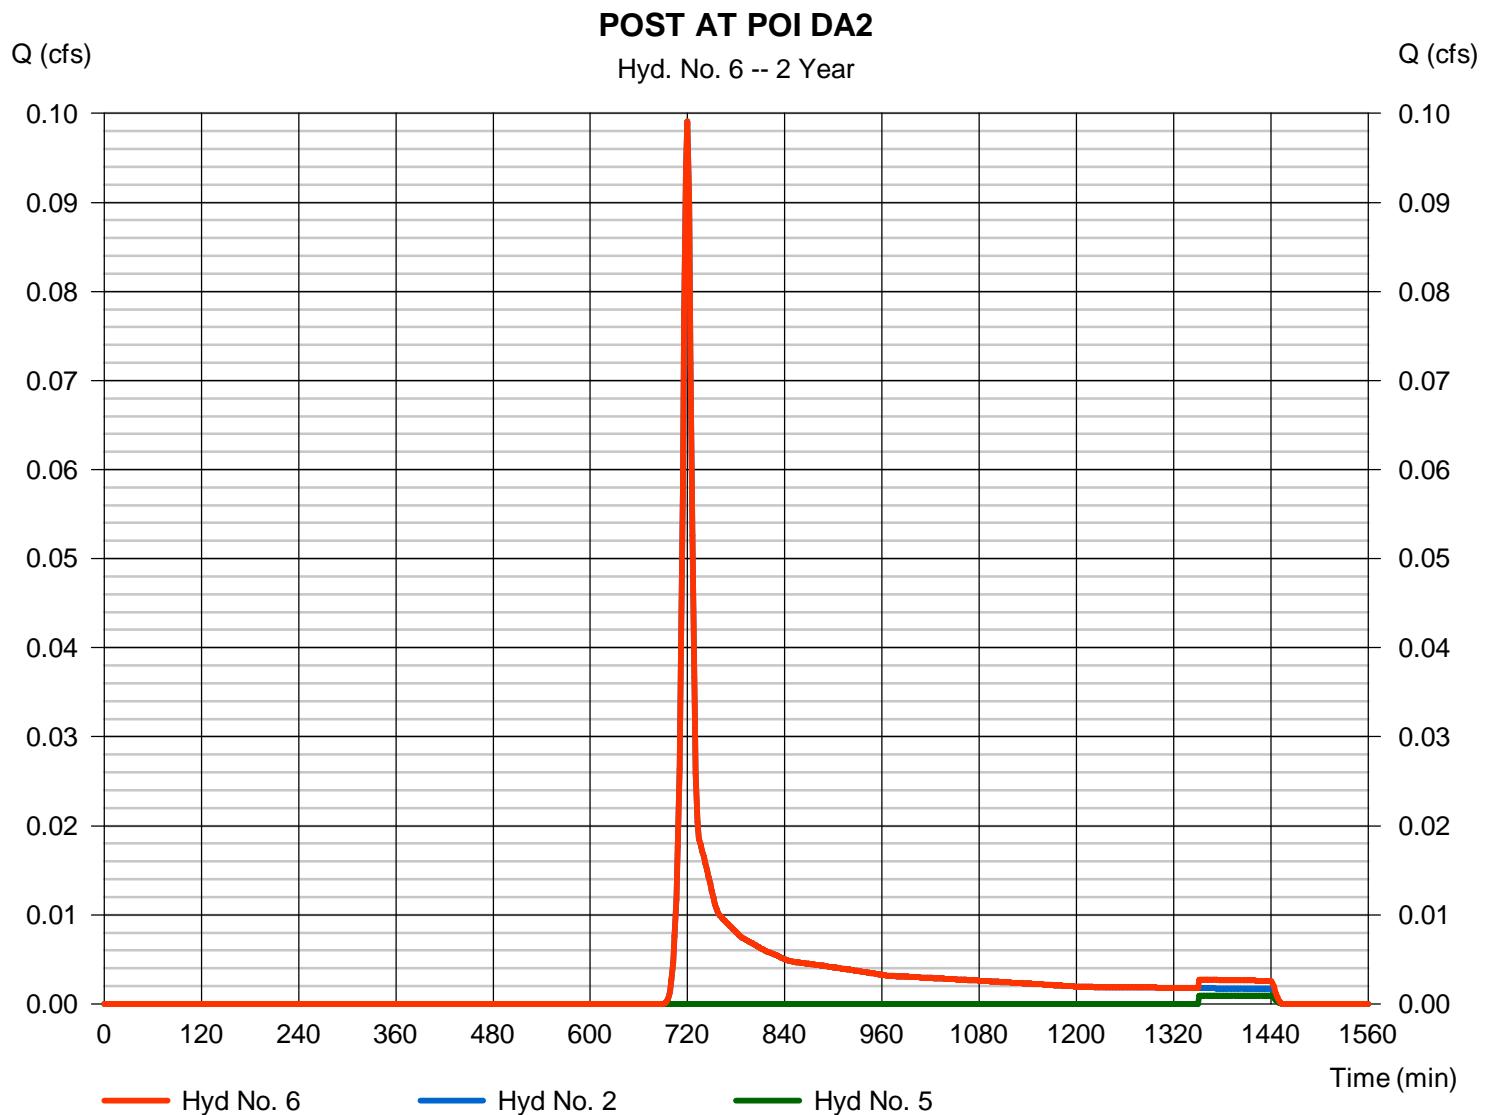

# Hydrograph Summary Report

Hydraflow Hydrographs Extension for AutoCAD® Civil 3D® 2015 by Autodesk, Inc. v10.4

Hyd. No.	Hydrograph type (origin)	Peak flow (cfs)	Time interval (min)	Time to Peak (min)	Hyd. volume (cuft)	Inflow hyd(s)	Maximum elevation (ft)	Total strge used (cuft)	Hydrograph Description
1	SCS Runoff	0.302	2	720	696	-----	-----	-----	PRE DA2
2	SCS Runoff	0.222	2	720	511	-----	-----	-----	POST UNDETAINED DA2
3	SCS Runoff	0.122	2	720	280	-----	-----	-----	POST DETAINED DA2
4	Diversion1	0.122	2	720	131	3	-----	-----	VOLUME ABSTRACTION
5	Diversion2	0.020	2	734	149	3	-----	-----	POST AFTER BMP
6	Combine	0.222	2	720	659	2, 5	-----	-----	POST AT POI DA2
Charger DA2.gpw				Return Period: 10 Year			Sunday, 11 / 6 / 2016		

# Hydrograph Report

Hydraflow Hydrographs Extension for AutoCAD® Civil 3D® 2015 by Autodesk, Inc. v10.4


Sunday, 11 / 6 / 2016

## Hyd. No. 1

PRE DA2

Hydrograph type	= SCS Runoff	Peak discharge	= 0.302 cfs
Storm frequency	= 10 yrs	Time to peak	= 720 min
Time interval	= 2 min	Hyd. volume	= 696 cuft
Drainage area	= 0.150 ac	Curve number	= 71*
Basin Slope	= 0.0 %	Hydraulic length	= 0 ft
Tc method	= TR55	Time of conc. (Tc)	= 8.40 min
Total precip.	= 3.83 in	Distribution	= Type II
Storm duration	= 24 hrs	Shape factor	= 484

\* Composite (Area/CN) = [(0.090 x 71) + (0.060 x 70)] / 0.150

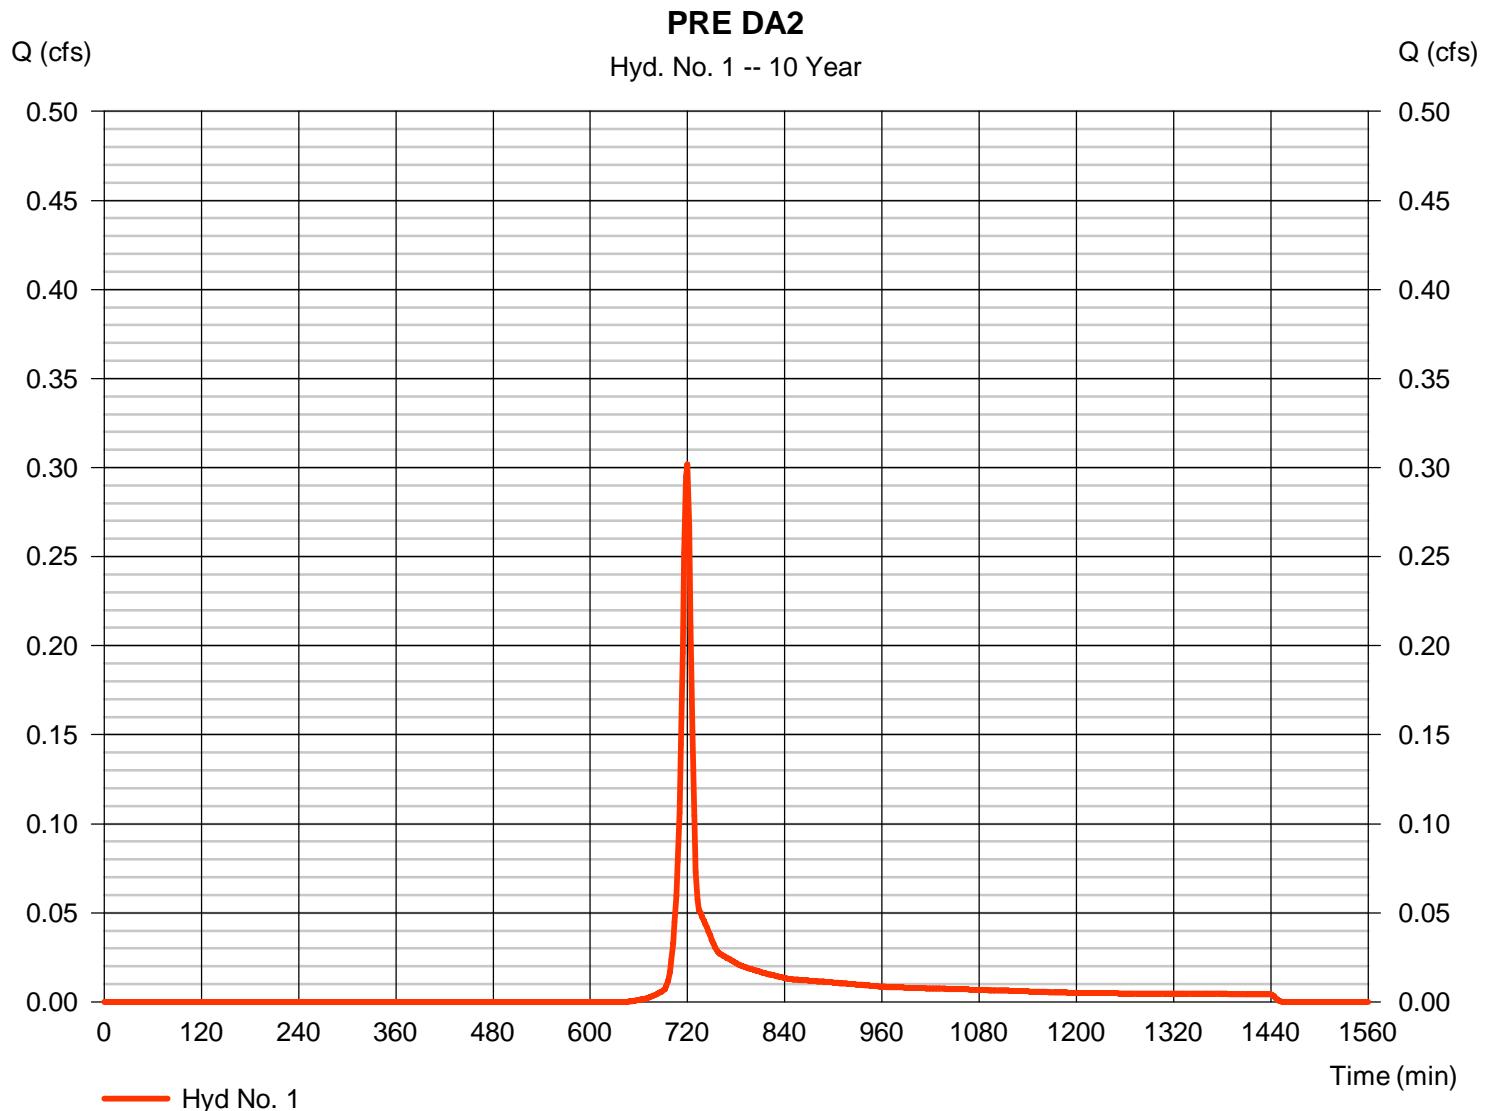

# Hydrograph Report

Hydraflow Hydrographs Extension for AutoCAD® Civil 3D® 2015 by Autodesk, Inc. v10.4

Sunday, 11 / 6 / 2016

## Hyd. No. 2


### POST UNDETAINED DA2

Hydrograph type	= SCS Runoff	Peak discharge	= 0.222 cfs
Storm frequency	= 10 yrs	Time to peak	= 720 min
Time interval	= 2 min	Hyd. volume	= 511 cuft
Drainage area	= 0.100 ac	Curve number	= 73*
Basin Slope	= 0.0 %	Hydraulic length	= 0 ft
Tc method	= TR55	Time of conc. (Tc)	= 8.40 min
Total precip.	= 3.83 in	Distribution	= Type II
Storm duration	= 24 hrs	Shape factor	= 484

\* Composite (Area/CN) = [(0.010 x 89) + (0.070 x 71) + (0.020 x 70)] / 0.100

### POST UNDETAINED DA2

Hyd. No. 2 -- 10 Year

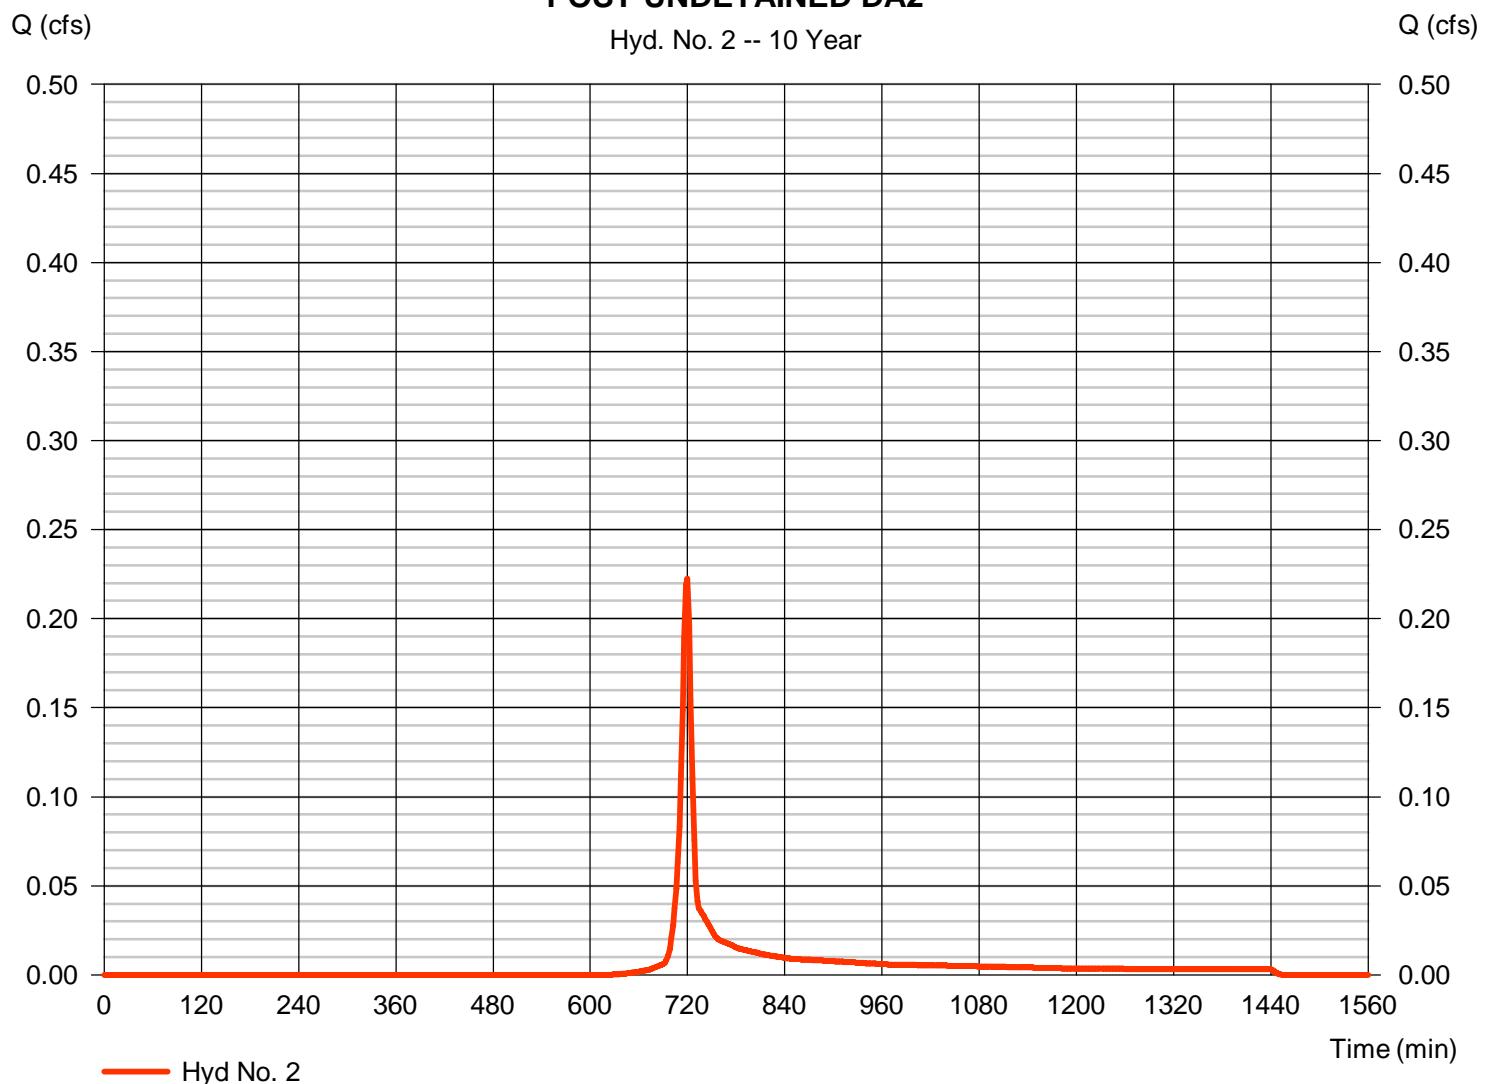

# Hydrograph Report

## Hyd. No. 3


### POST DETAINED DA2

Hydrograph type	= SCS Runoff	Peak discharge	= 0.122 cfs
Storm frequency	= 10 yrs	Time to peak	= 720 min
Time interval	= 2 min	Hyd. volume	= 280 cuft
Drainage area	= 0.050 ac	Curve number	= 75*
Basin Slope	= 0.0 %	Hydraulic length	= 0 ft
Tc method	= TR55	Time of conc. (Tc)	= 7.10 min
Total precip.	= 3.83 in	Distribution	= Type II
Storm duration	= 24 hrs	Shape factor	= 484

\* Composite (Area/CN) = [(0.010 x 89) + (0.040 x 71)] / 0.050

### POST DETAINED DA2

Hyd. No. 3 -- 10 Year

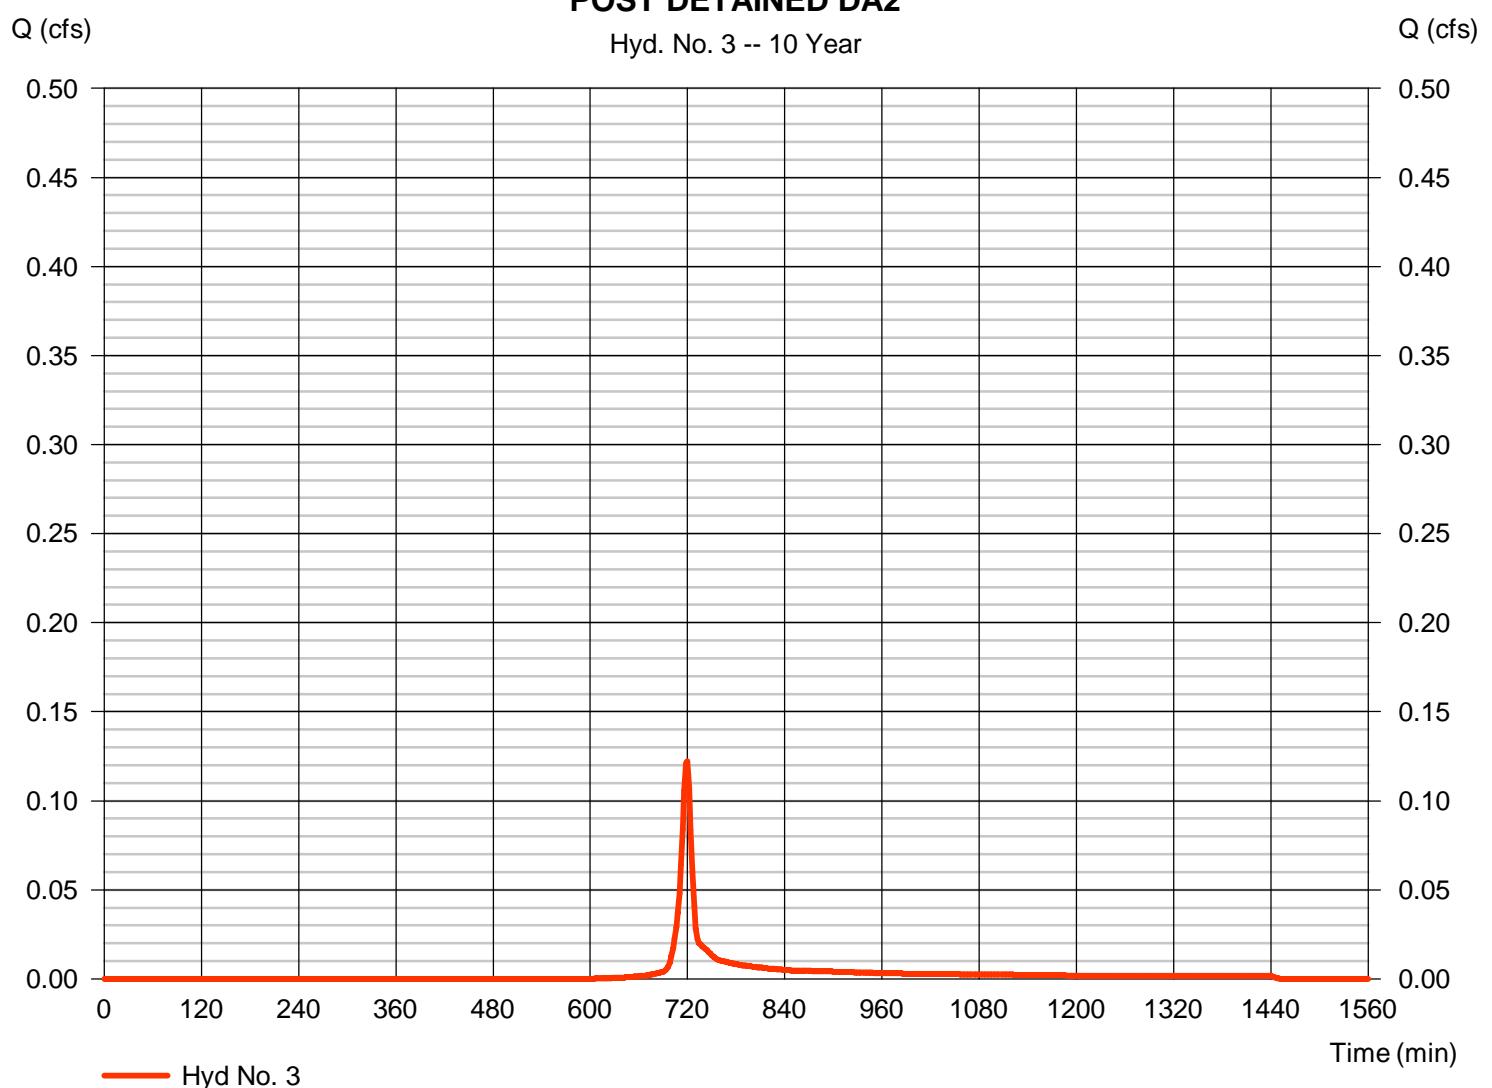

# Hydrograph Report


Hydraflow Hydrographs Extension for AutoCAD® Civil 3D® 2015 by Autodesk, Inc. v10.4

Sunday, 11 / 6 / 2016

## Hyd. No. 4

### VOLUME ABSTRACTION

Hydrograph type	= Diversion1	Peak discharge	= 0.122 cfs
Storm frequency	= 10 yrs	Time to peak	= 720 min
Time interval	= 2 min	Hyd. volume	= 131 cuft
Inflow hydrograph	= 3 - POST DETAINED DA2	2nd diverted hyd.	= 5
Diversion method	= First Flush Volume	Volume Up To	= 130.00 cuft

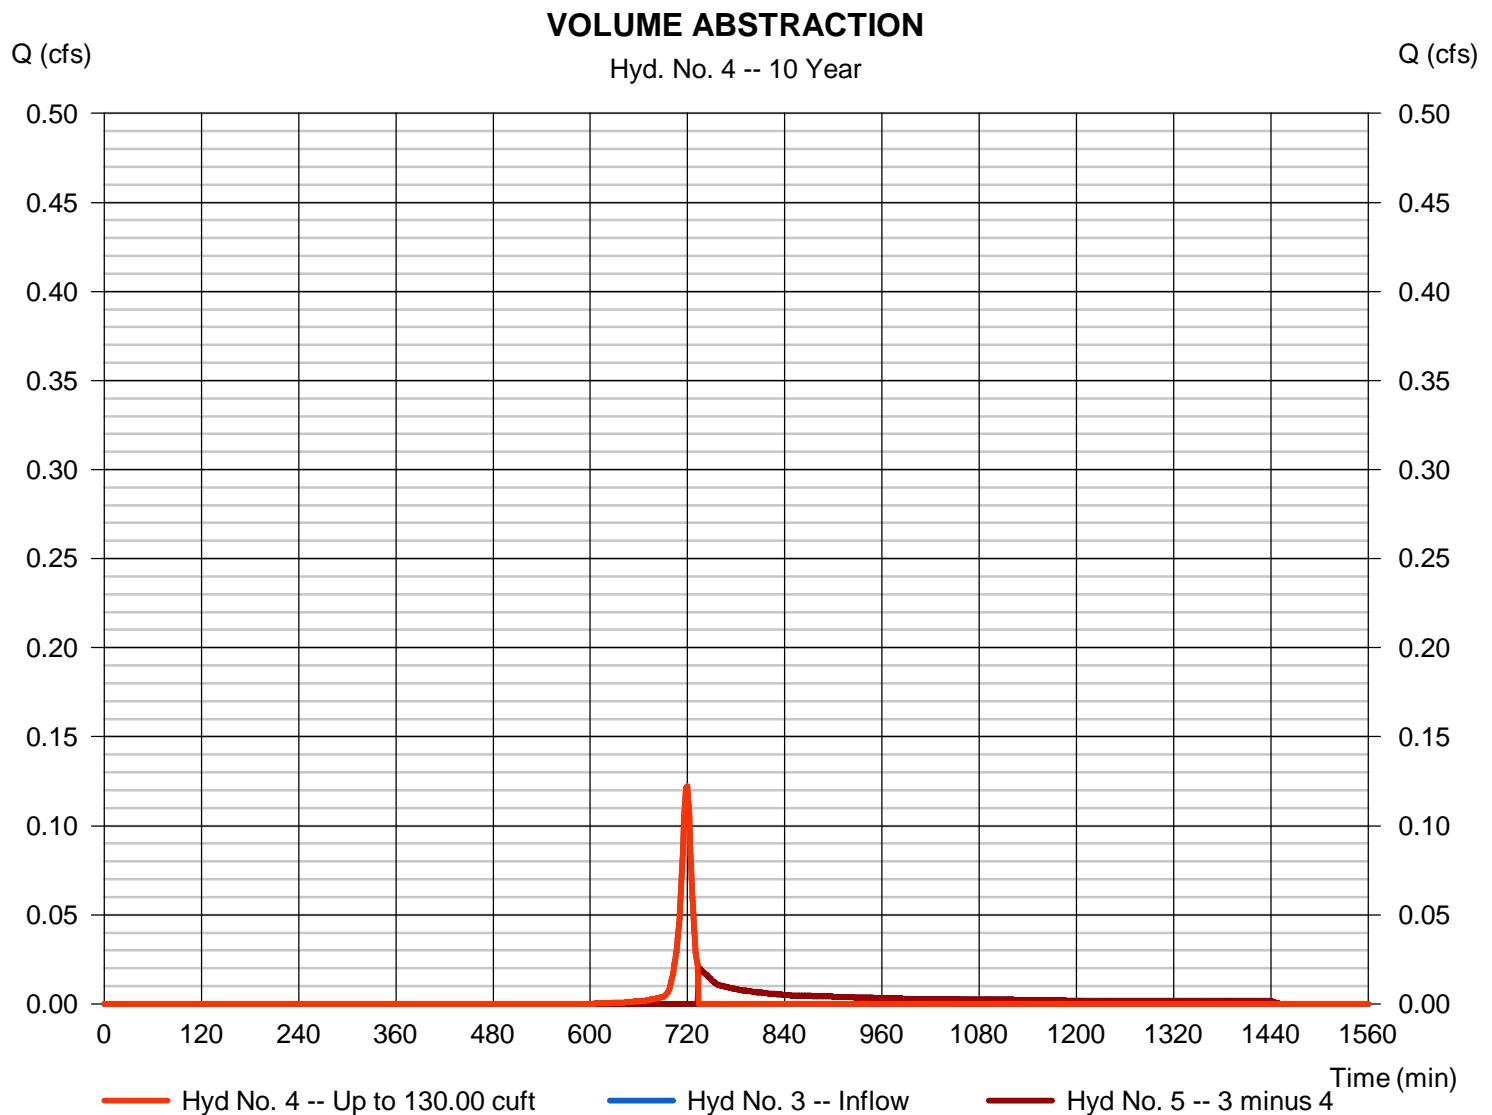

# Hydrograph Report


Hydraflow Hydrographs Extension for AutoCAD® Civil 3D® 2015 by Autodesk, Inc. v10.4

Sunday, 11 / 6 / 2016

## Hyd. No. 5

### POST AFTER BMP

Hydrograph type	= Diversion2	Peak discharge	= 0.020 cfs
Storm frequency	= 10 yrs	Time to peak	= 734 min
Time interval	= 2 min	Hyd. volume	= 149 cuft
Inflow hydrograph	= 3 - POST DETAINED DA2	2nd diverted hyd.	= 4
Diversion method	= First Flush Volume	Volume Up To	= 130.00 cuft

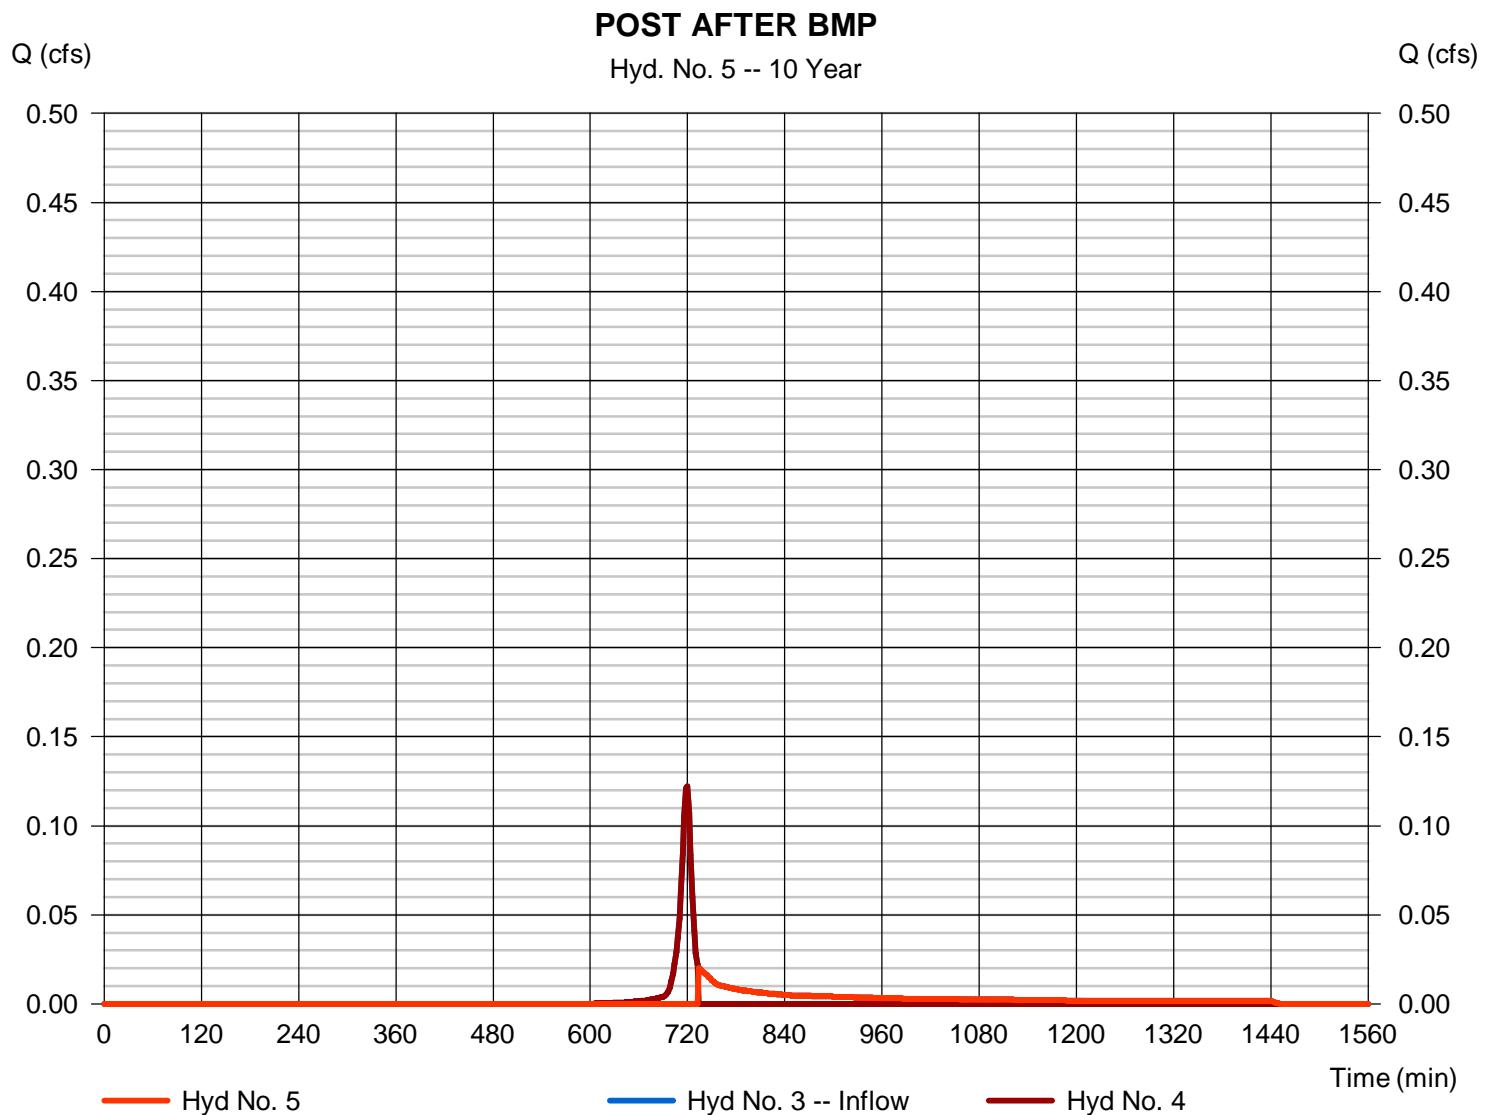

# Hydrograph Report


Hydraflow Hydrographs Extension for AutoCAD® Civil 3D® 2015 by Autodesk, Inc. v10.4

Sunday, 11 / 6 / 2016

## Hyd. No. 6

### POST AT POI DA2

Hydrograph type	= Combine	Peak discharge	= 0.222 cfs
Storm frequency	= 10 yrs	Time to peak	= 720 min
Time interval	= 2 min	Hyd. volume	= 659 cuft
Inflow hyds.	= 2, 5	Contrib. drain. area	= 0.100 ac

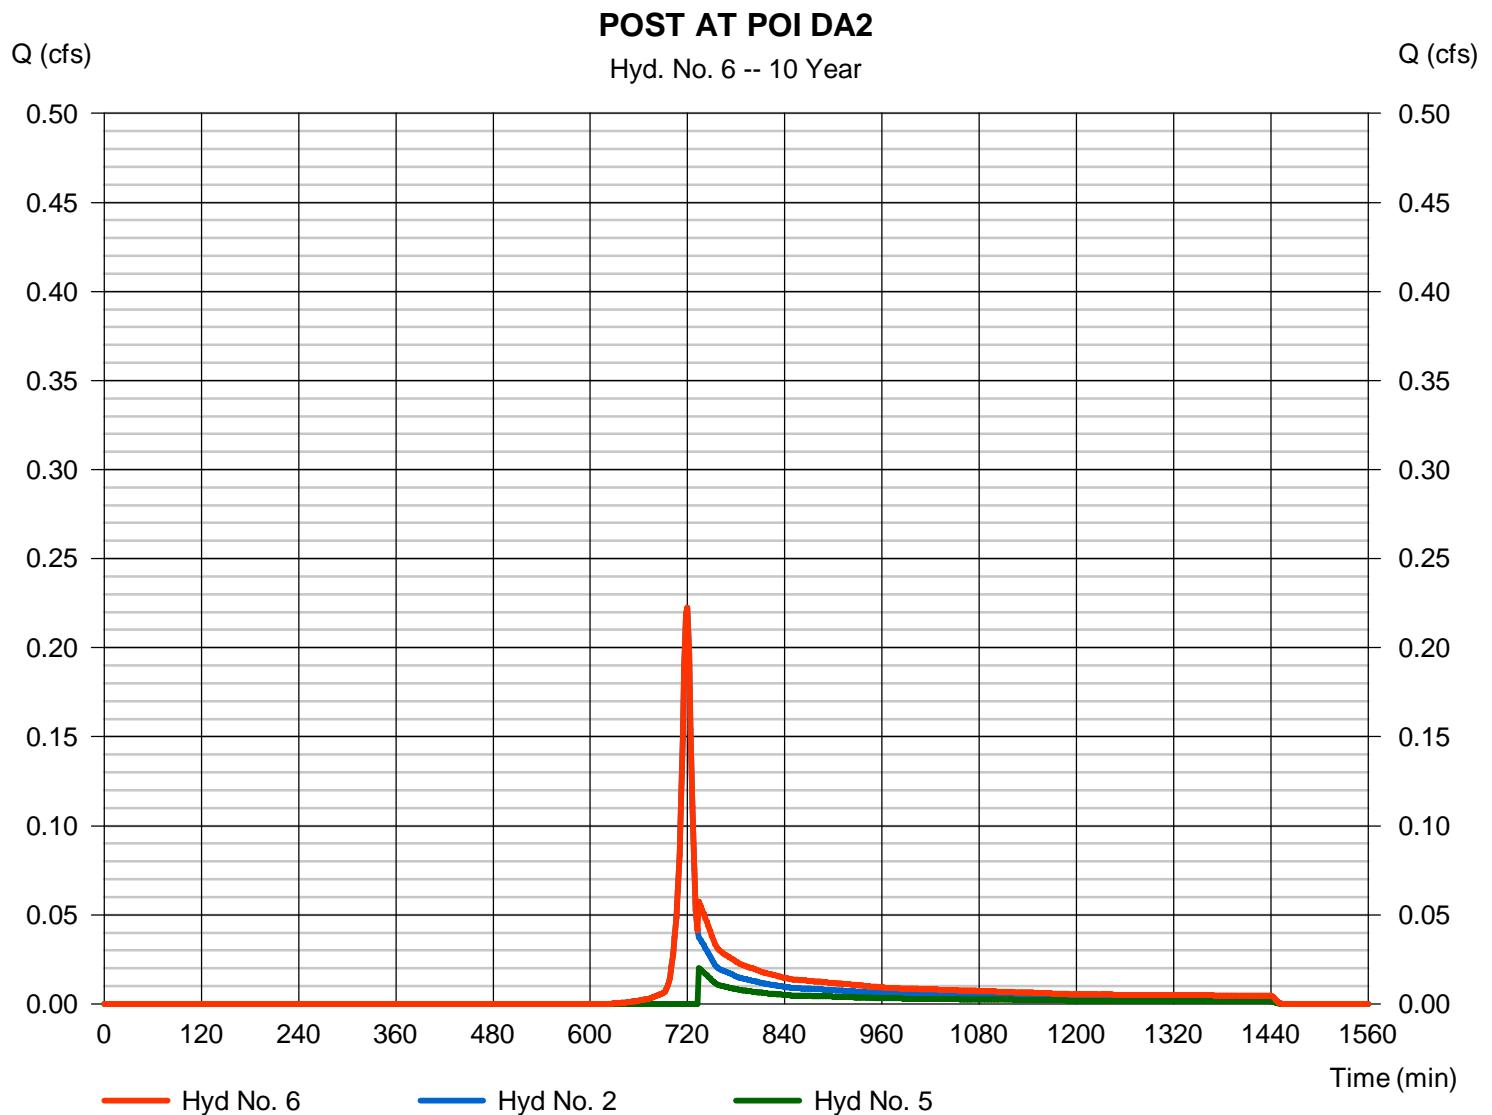

# Hydrograph Summary Report

Hydraflow Hydrographs Extension for AutoCAD® Civil 3D® 2015 by Autodesk, Inc. v10.4

Hyd. No.	Hydrograph type (origin)	Peak flow (cfs)	Time interval (min)	Time to Peak (min)	Hyd. volume (cuft)	Inflow hyd(s)	Maximum elevation (ft)	Total strge used (cuft)	Hydrograph Description
1	SCS Runoff	0.547	2	720	1,252	-----	-----	-----	PRE DA2
2	SCS Runoff	0.392	2	718	897	-----	-----	-----	POST UNDETAINED DA2
3	SCS Runoff	0.210	2	718	480	-----	-----	-----	POST DETAINED DA2
4	Diversion1	0.210	2	718	153	3	-----	-----	VOLUME ABSTRACTION
5	Diversion2	0.209	2	720	327	3	-----	-----	POST AFTER BMP
6	Combine	0.600	2	720	1,223	2, 5	-----	-----	POST AT POI DA2
Charger DA2.gpw				Return Period: 50 Year			Sunday, 11 / 6 / 2016		

# Hydrograph Report

Hydraflow Hydrographs Extension for AutoCAD® Civil 3D® 2015 by Autodesk, Inc. v10.4


Sunday, 11 / 6 / 2016

## Hyd. No. 1

PRE DA2

Hydrograph type	= SCS Runoff	Peak discharge	= 0.547 cfs
Storm frequency	= 50 yrs	Time to peak	= 720 min
Time interval	= 2 min	Hyd. volume	= 1,252 cuft
Drainage area	= 0.150 ac	Curve number	= 71*
Basin Slope	= 0.0 %	Hydraulic length	= 0 ft
Tc method	= TR55	Time of conc. (Tc)	= 8.40 min
Total precip.	= 5.24 in	Distribution	= Type II
Storm duration	= 24 hrs	Shape factor	= 484

\* Composite (Area/CN) = [(0.090 x 71) + (0.060 x 70)] / 0.150

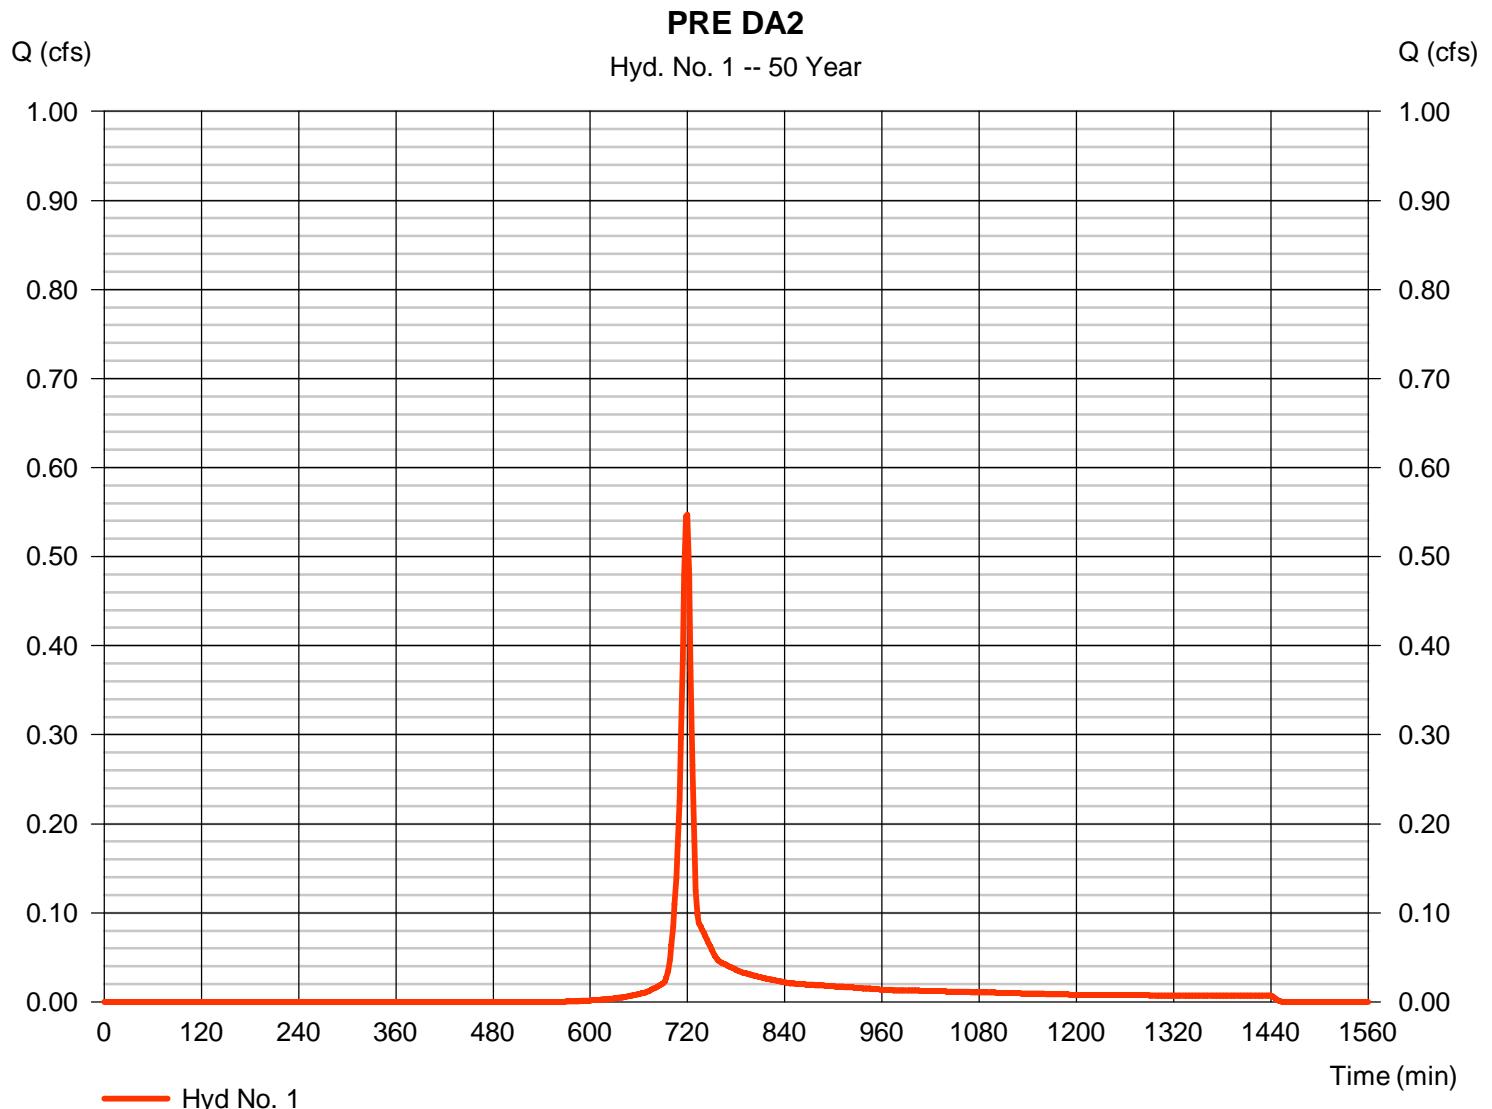

# Hydrograph Report

Hydraflow Hydrographs Extension for AutoCAD® Civil 3D® 2015 by Autodesk, Inc. v10.4

Sunday, 11 / 6 / 2016

## Hyd. No. 2


### POST UNDETAINED DA2

Hydrograph type	= SCS Runoff	Peak discharge	= 0.392 cfs
Storm frequency	= 50 yrs	Time to peak	= 718 min
Time interval	= 2 min	Hyd. volume	= 897 cuft
Drainage area	= 0.100 ac	Curve number	= 73*
Basin Slope	= 0.0 %	Hydraulic length	= 0 ft
Tc method	= TR55	Time of conc. (Tc)	= 8.40 min
Total precip.	= 5.24 in	Distribution	= Type II
Storm duration	= 24 hrs	Shape factor	= 484

\* Composite (Area/CN) = [(0.010 x 89) + (0.070 x 71) + (0.020 x 70)] / 0.100

### POST UNDETAINED DA2

Hyd. No. 2 -- 50 Year

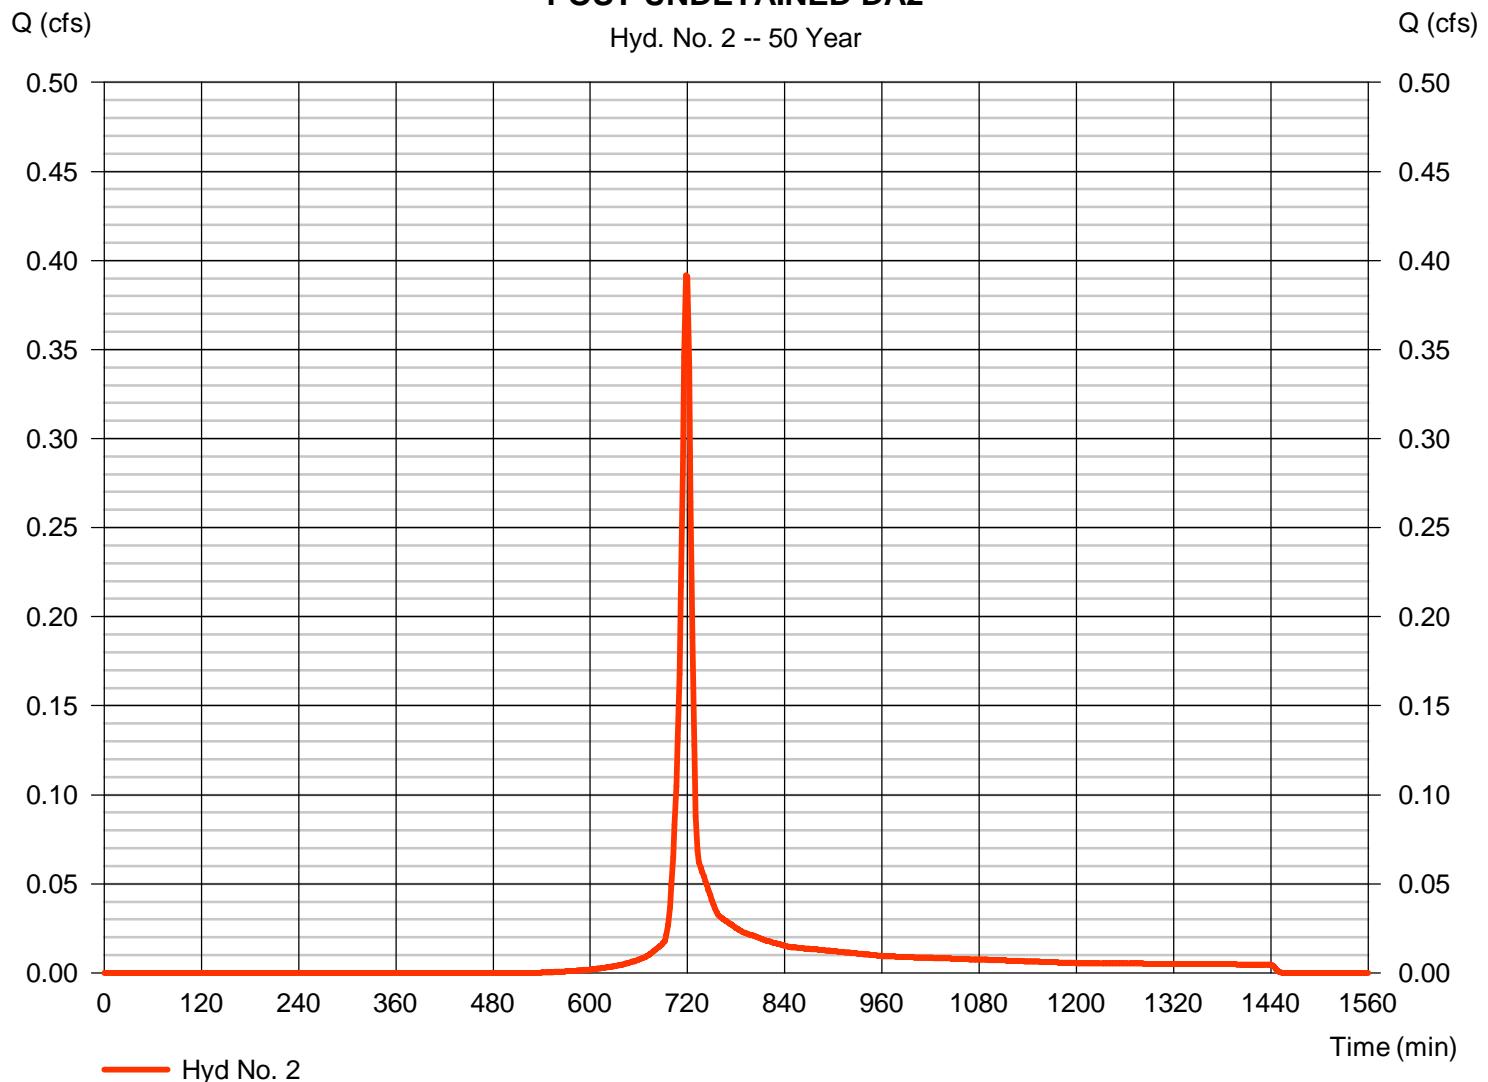

# Hydrograph Report

Hydraflow Hydrographs Extension for AutoCAD® Civil 3D® 2015 by Autodesk, Inc. v10.4

Sunday, 11 / 6 / 2016

## Hyd. No. 3


### POST DETAINED DA2

Hydrograph type	= SCS Runoff	Peak discharge	= 0.210 cfs
Storm frequency	= 50 yrs	Time to peak	= 718 min
Time interval	= 2 min	Hyd. volume	= 480 cuft
Drainage area	= 0.050 ac	Curve number	= 75*
Basin Slope	= 0.0 %	Hydraulic length	= 0 ft
Tc method	= TR55	Time of conc. (Tc)	= 7.10 min
Total precip.	= 5.24 in	Distribution	= Type II
Storm duration	= 24 hrs	Shape factor	= 484

\* Composite (Area/CN) = [(0.010 x 89) + (0.040 x 71)] / 0.050

### POST DETAINED DA2

Hyd. No. 3 -- 50 Year

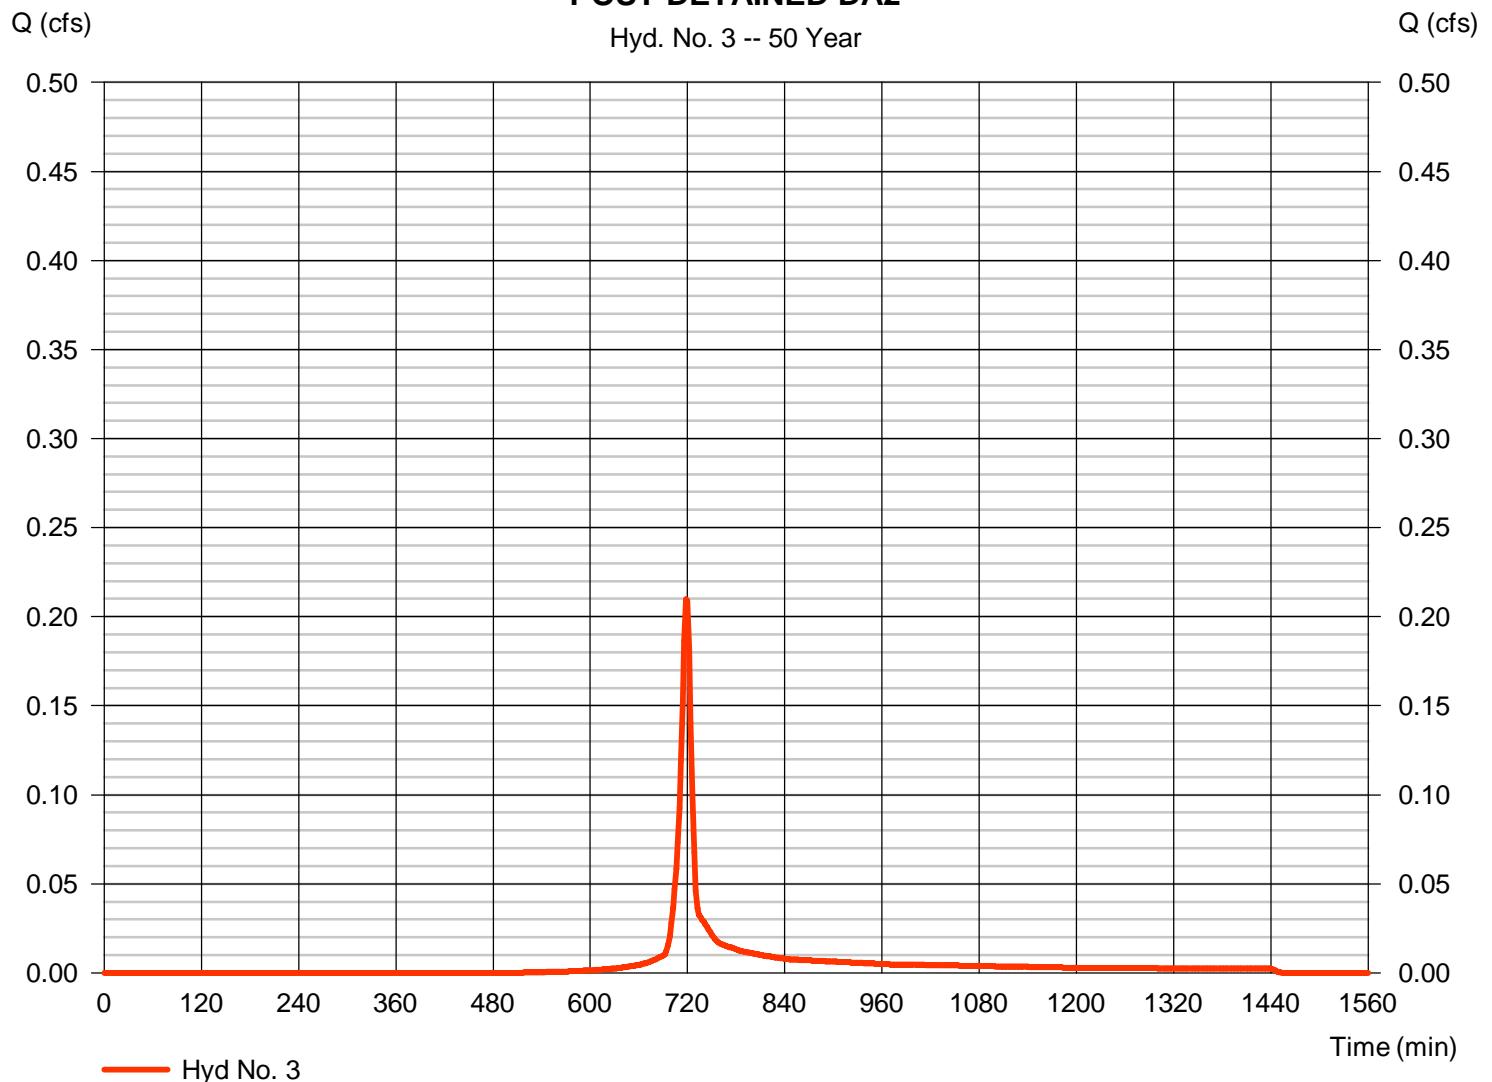

# Hydrograph Report


Hydraflow Hydrographs Extension for AutoCAD® Civil 3D® 2015 by Autodesk, Inc. v10.4

Sunday, 11 / 6 / 2016

## Hyd. No. 4

### VOLUME ABSTRACTION

Hydrograph type	= Diversion1	Peak discharge	= 0.210 cfs
Storm frequency	= 50 yrs	Time to peak	= 718 min
Time interval	= 2 min	Hyd. volume	= 153 cuft
Inflow hydrograph	= 3 - POST DETAINED DA2	2nd diverted hyd.	= 5
Diversion method	= First Flush Volume	Volume Up To	= 130.00 cuft

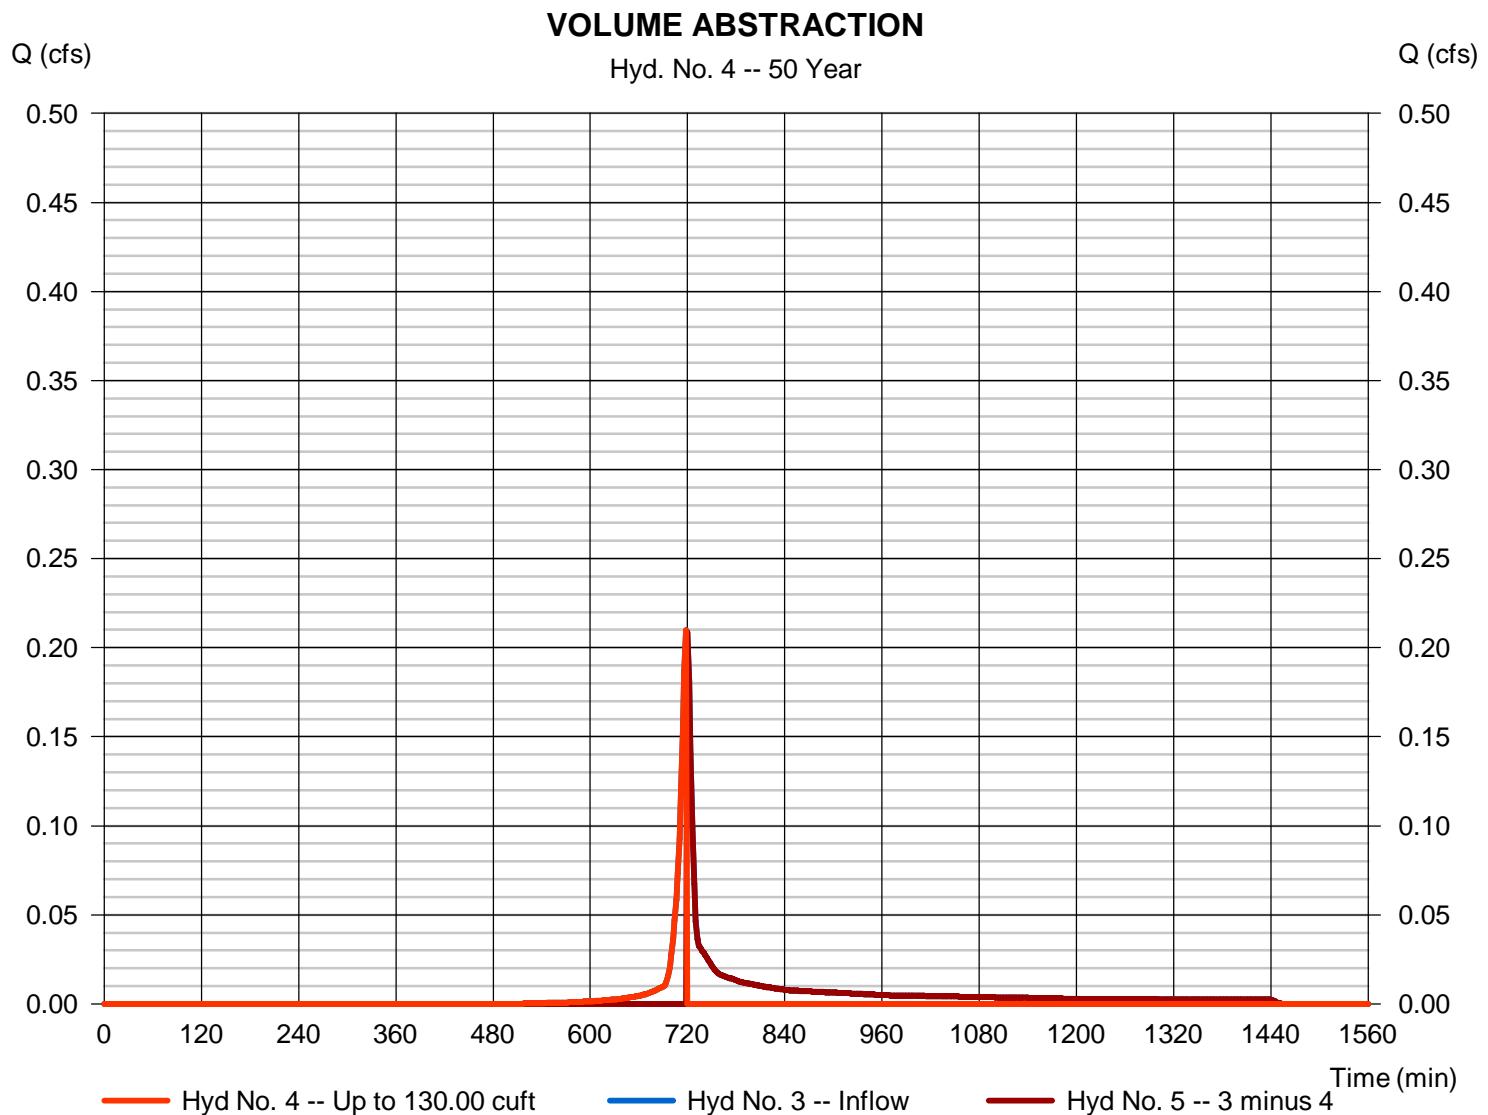

# Hydrograph Report


Hydraflow Hydrographs Extension for AutoCAD® Civil 3D® 2015 by Autodesk, Inc. v10.4

Sunday, 11 / 6 / 2016

## Hyd. No. 5

### POST AFTER BMP

Hydrograph type	= Diversion2	Peak discharge	= 0.209 cfs
Storm frequency	= 50 yrs	Time to peak	= 720 min
Time interval	= 2 min	Hyd. volume	= 327 cuft
Inflow hydrograph	= 3 - POST DETAINED DA2	2nd diverted hyd.	= 4
Diversion method	= First Flush Volume	Volume Up To	= 130.00 cuft

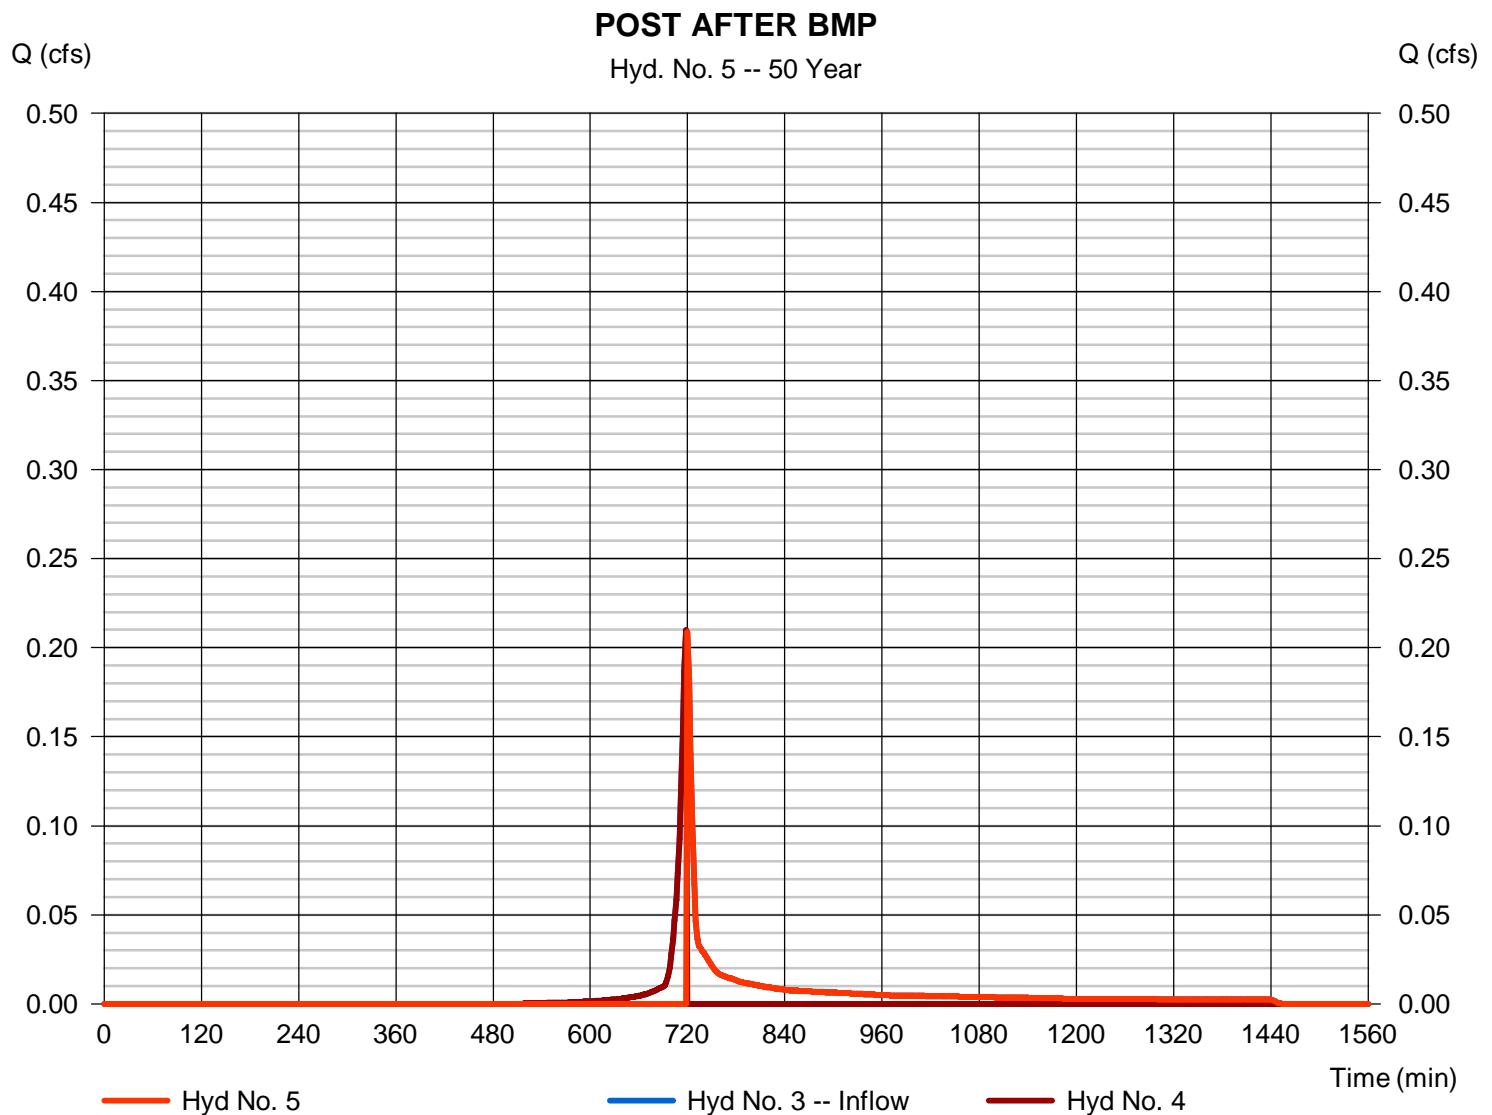

# Hydrograph Report


Hydraflow Hydrographs Extension for AutoCAD® Civil 3D® 2015 by Autodesk, Inc. v10.4

Sunday, 11 / 6 / 2016

## Hyd. No. 6

### POST AT POI DA2

Hydrograph type	= Combine	Peak discharge	= 0.600 cfs
Storm frequency	= 50 yrs	Time to peak	= 720 min
Time interval	= 2 min	Hyd. volume	= 1,223 cuft
Inflow hyds.	= 2, 5	Contrib. drain. area	= 0.100 ac

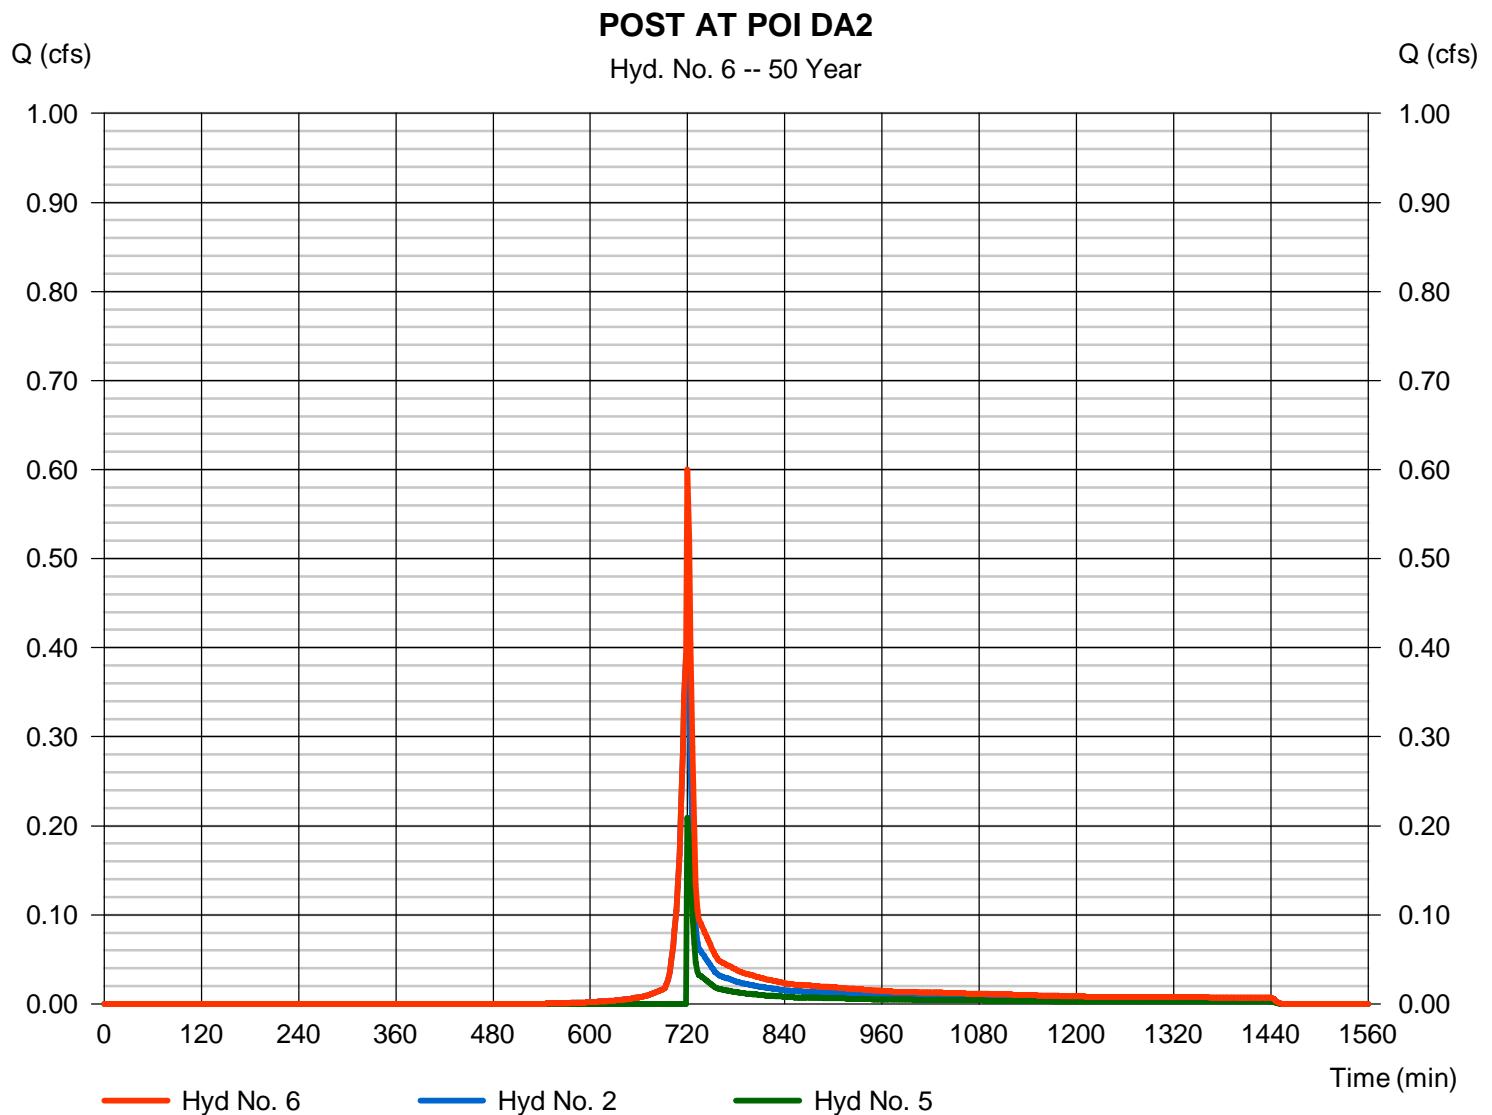

# Hydrograph Summary Report

Hydraflow Hydrographs Extension for AutoCAD® Civil 3D® 2015 by Autodesk, Inc. v10.4

Hyd. No.	Hydrograph type (origin)	Peak flow (cfs)	Time interval (min)	Time to Peak (min)	Hyd. volume (cuft)	Inflow hyd(s)	Maximum elevation (ft)	Total strge used (cuft)	Hydrograph Description
1	SCS Runoff	0.672	2	718	1,539	-----	-----	-----	PRE DA2
2	SCS Runoff	0.478	2	718	1,094	-----	-----	-----	POST UNDETAINED DA2
3	SCS Runoff	0.254	2	718	582	-----	-----	-----	POST DETAINED DA2
4	Diversion1	0.186	2	714	138	3	-----	-----	VOLUME ABSTRACTION
5	Diversion2	0.254	2	718	444	3	-----	-----	POST AFTER BMP
6	Combine	0.732	2	718	1,538	2, 5	-----	-----	POST AT POI DA2
Charger DA2.gpw				Return Period: 100 Year				Sunday, 11 / 6 / 2016	

# Hydrograph Report

Hydraflow Hydrographs Extension for AutoCAD® Civil 3D® 2015 by Autodesk, Inc. v10.4


Sunday, 11 / 6 / 2016

## Hyd. No. 1

PRE DA2

Hydrograph type	= SCS Runoff	Peak discharge	= 0.672 cfs
Storm frequency	= 100 yrs	Time to peak	= 718 min
Time interval	= 2 min	Hyd. volume	= 1,539 cuft
Drainage area	= 0.150 ac	Curve number	= 71*
Basin Slope	= 0.0 %	Hydraulic length	= 0 ft
Tc method	= TR55	Time of conc. (Tc)	= 8.40 min
Total precip.	= 5.91 in	Distribution	= Type II
Storm duration	= 24 hrs	Shape factor	= 484

\* Composite (Area/CN) = [(0.090 x 71) + (0.060 x 70)] / 0.150

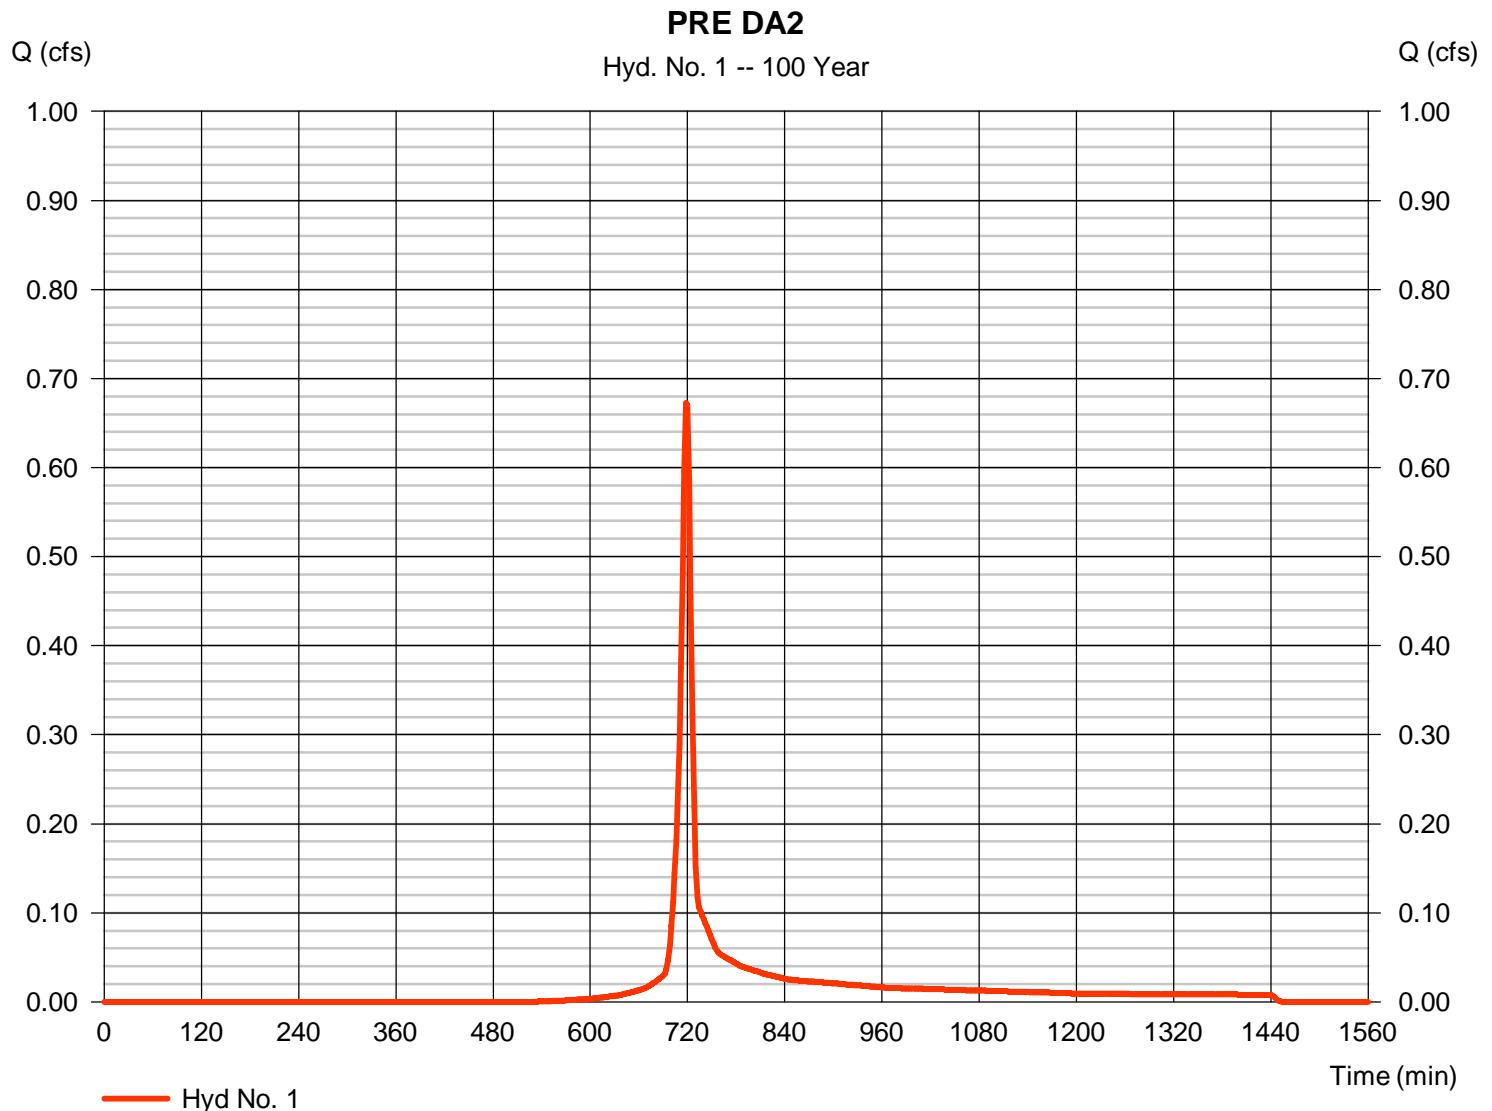

# Hydrograph Report

Hydraflow Hydrographs Extension for AutoCAD® Civil 3D® 2015 by Autodesk, Inc. v10.4


Sunday, 11 / 6 / 2016

## Hyd. No. 2

### POST UNDETAINED DA2

Hydrograph type	= SCS Runoff	Peak discharge	= 0.478 cfs
Storm frequency	= 100 yrs	Time to peak	= 718 min
Time interval	= 2 min	Hyd. volume	= 1,094 cuft
Drainage area	= 0.100 ac	Curve number	= 73*
Basin Slope	= 0.0 %	Hydraulic length	= 0 ft
Tc method	= TR55	Time of conc. (Tc)	= 8.40 min
Total precip.	= 5.91 in	Distribution	= Type II
Storm duration	= 24 hrs	Shape factor	= 484

\* Composite (Area/CN) = [(0.010 x 89) + (0.070 x 71) + (0.020 x 70)] / 0.100

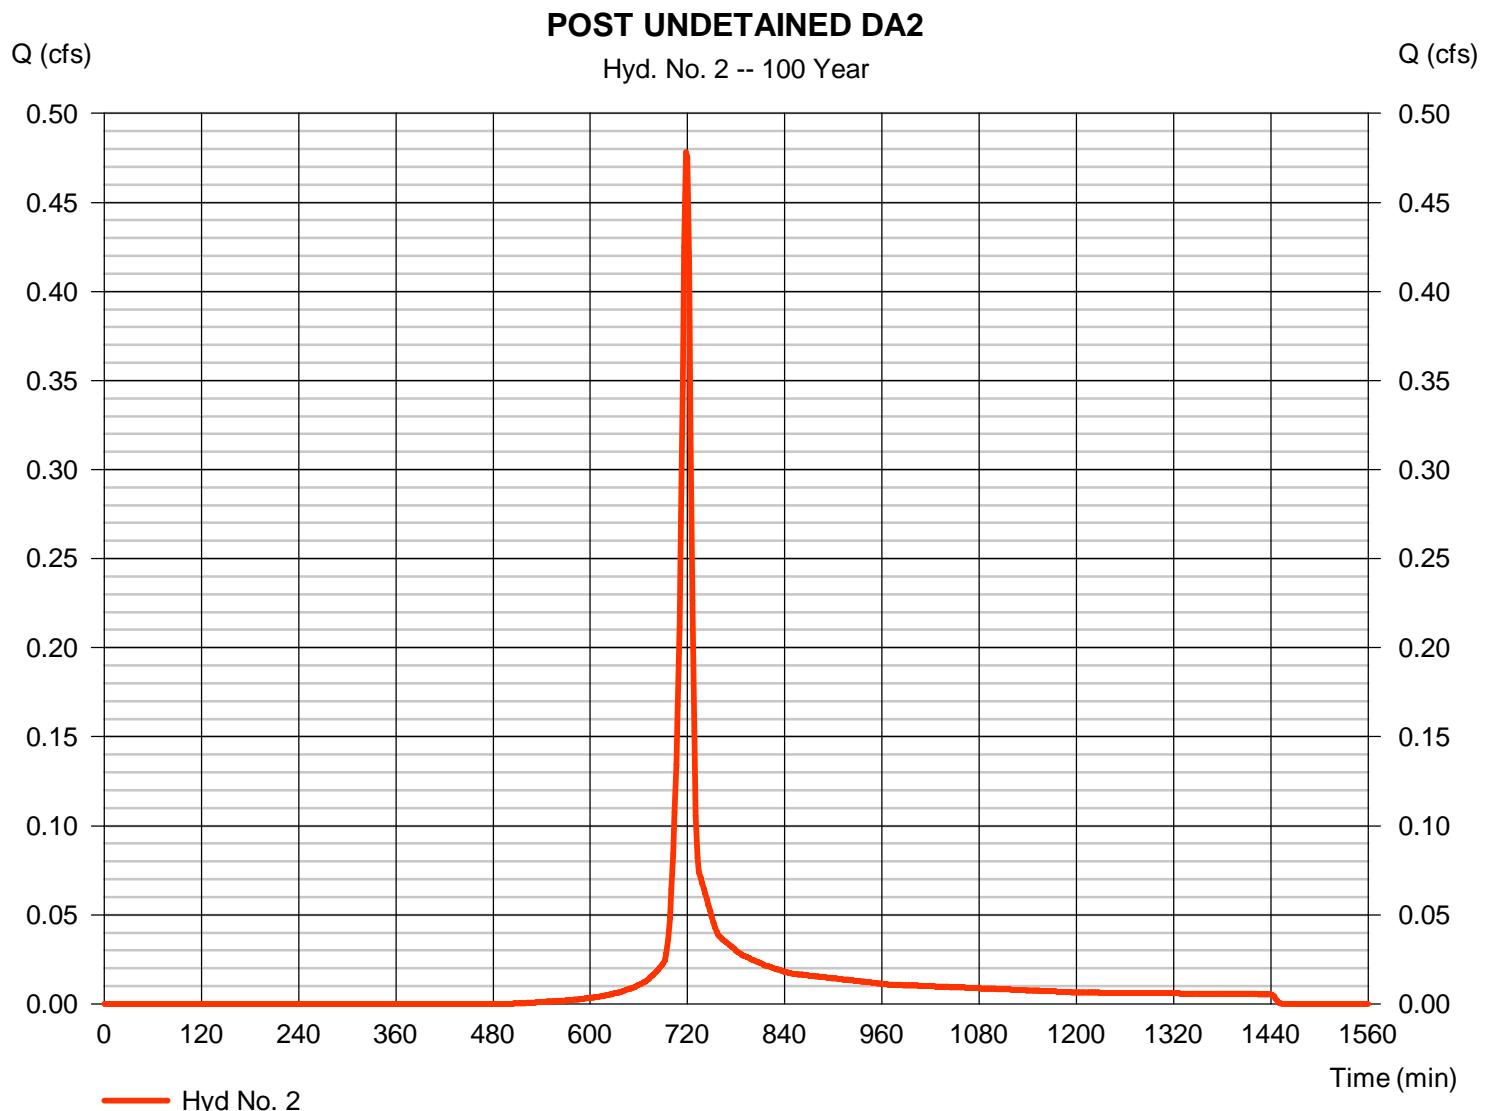

# Hydrograph Report

Hydraflow Hydrographs Extension for AutoCAD® Civil 3D® 2015 by Autodesk, Inc. v10.4


Sunday, 11 / 6 / 2016

## Hyd. No. 3

### POST DETAINED DA2

Hydrograph type	= SCS Runoff	Peak discharge	= 0.254 cfs
Storm frequency	= 100 yrs	Time to peak	= 718 min
Time interval	= 2 min	Hyd. volume	= 582 cuft
Drainage area	= 0.050 ac	Curve number	= 75*
Basin Slope	= 0.0 %	Hydraulic length	= 0 ft
Tc method	= TR55	Time of conc. (Tc)	= 7.10 min
Total precip.	= 5.91 in	Distribution	= Type II
Storm duration	= 24 hrs	Shape factor	= 484

\* Composite (Area/CN) = [(0.010 x 89) + (0.040 x 71)] / 0.050

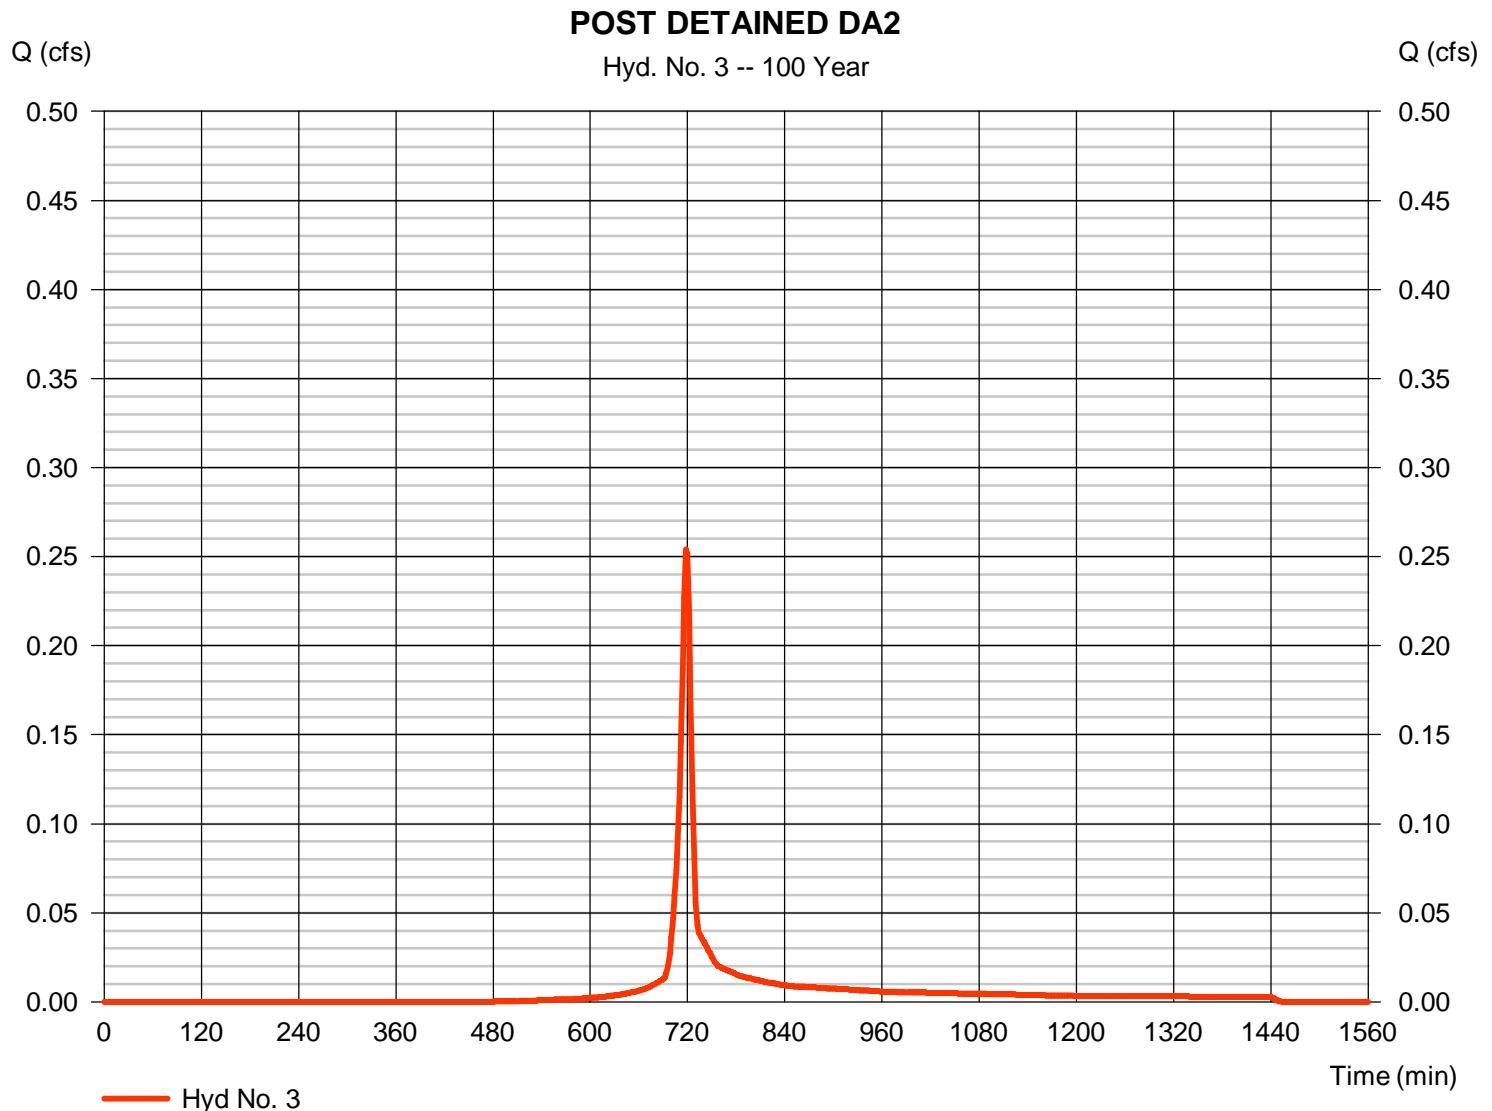

# Hydrograph Report


Hydraflow Hydrographs Extension for AutoCAD® Civil 3D® 2015 by Autodesk, Inc. v10.4

Sunday, 11 / 6 / 2016

## Hyd. No. 4

### VOLUME ABSTRACTION

Hydrograph type	= Diversion1	Peak discharge	= 0.186 cfs
Storm frequency	= 100 yrs	Time to peak	= 714 min
Time interval	= 2 min	Hyd. volume	= 138 cuft
Inflow hydrograph	= 3 - POST DETAINED DA2	2nd diverted hyd.	= 5
Diversion method	= First Flush Volume	Volume Up To	= 130.00 cuft

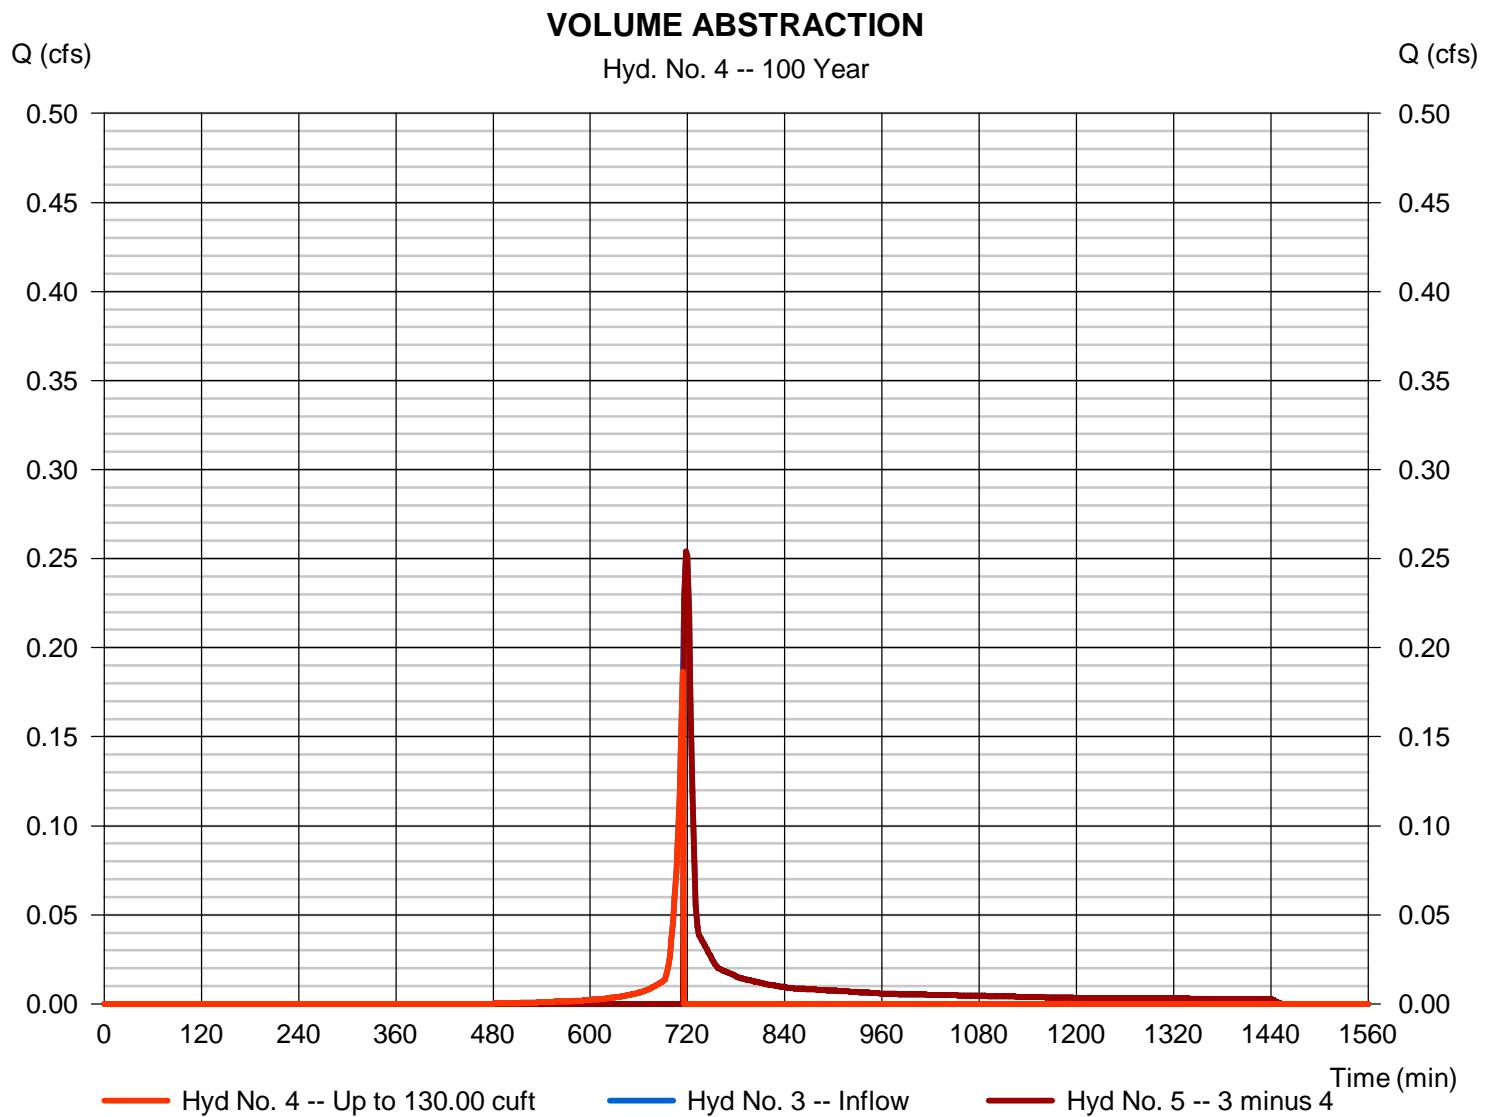

# Hydrograph Report


Hydraflow Hydrographs Extension for AutoCAD® Civil 3D® 2015 by Autodesk, Inc. v10.4

Sunday, 11 / 6 / 2016

## Hyd. No. 5

### POST AFTER BMP

Hydrograph type	= Diversion2	Peak discharge	= 0.254 cfs
Storm frequency	= 100 yrs	Time to peak	= 718 min
Time interval	= 2 min	Hyd. volume	= 444 cuft
Inflow hydrograph	= 3 - POST DETAINED DA2	2nd diverted hyd.	= 4
Diversion method	= First Flush Volume	Volume Up To	= 130.00 cuft

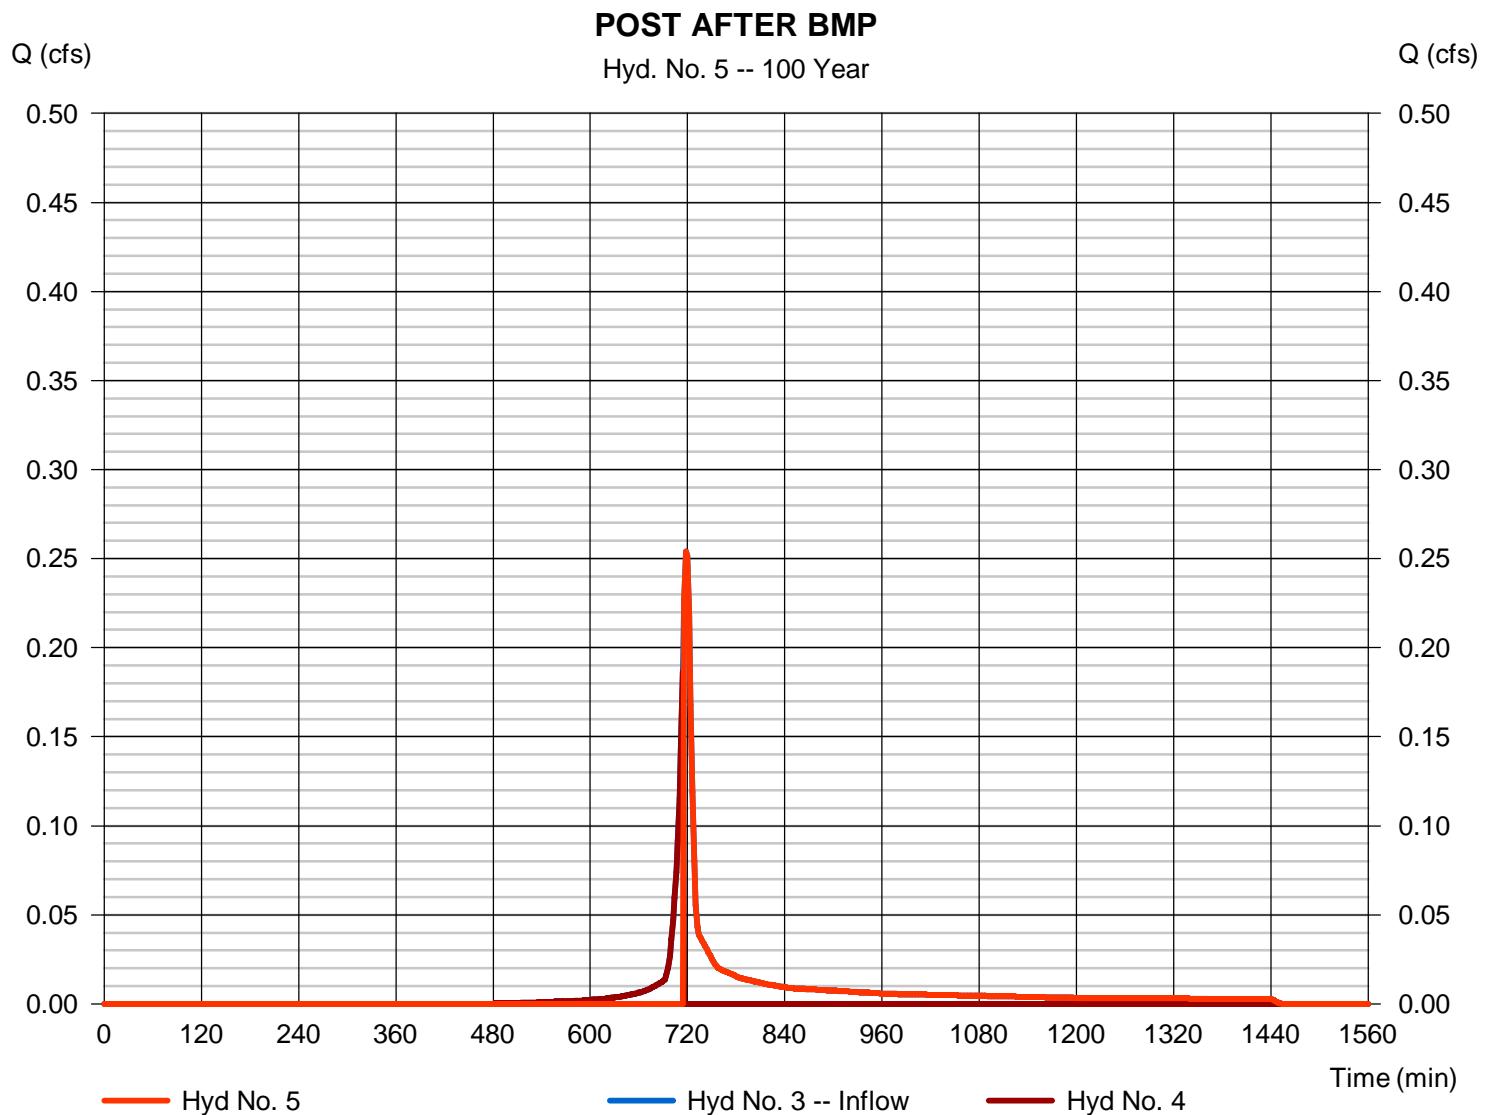

# Hydrograph Report


Hydraflow Hydrographs Extension for AutoCAD® Civil 3D® 2015 by Autodesk, Inc. v10.4

Sunday, 11 / 6 / 2016

## Hyd. No. 6

### POST AT POI DA2

Hydrograph type	= Combine	Peak discharge	= 0.732 cfs
Storm frequency	= 100 yrs	Time to peak	= 718 min
Time interval	= 2 min	Hyd. volume	= 1,538 cuft
Inflow hyds.	= 2, 5	Contrib. drain. area	= 0.100 ac

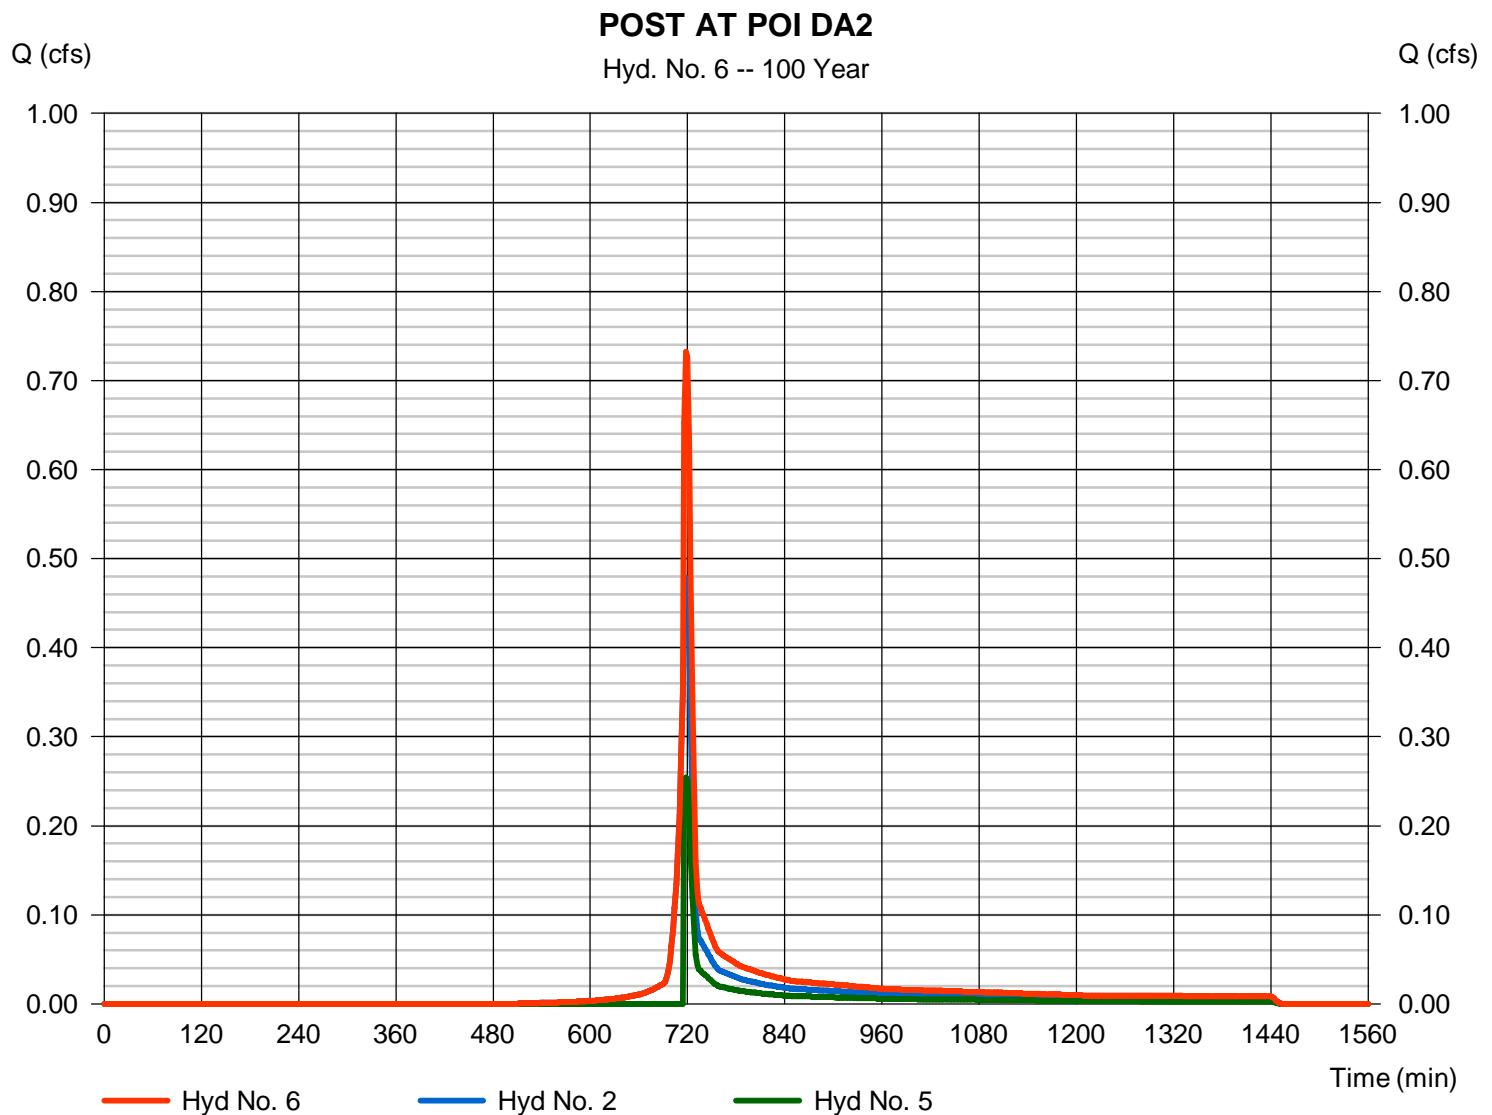

# Hydraflow Rainfall Report

Return Period (Yrs)	Intensity-Duration-Frequency Equation Coefficients (FHA)			
	B	D	E	(N/A)
1	39.9938	10.0000	0.8826	-----
2	46.8600	10.1000	0.8723	-----
3	0.0000	0.0000	0.0000	-----
5	47.4204	9.3000	0.8196	-----
10	26589.4199	47.3998	2.1160	-----
25	53942.1797	51.5998	2.2139	-----
50	69308.7266	52.6998	2.2395	-----
100	106327.6016	55.1997	2.2977	-----

File name: Charger IDF.IDF

$$\text{Intensity} = B / (T_c + D)^E$$


Return Period (Yrs)	Intensity Values (in/hr)											
	5 min	10	15	20	25	30	35	40	45	50	55	60
1	3.66	2.84	2.33	1.99	1.73	1.54	1.39	1.27	1.16	1.08	1.00	0.94
2	4.39	3.42	2.82	2.40	2.10	1.87	1.69	1.54	1.42	1.32	1.23	1.15
3	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
5	5.36	4.19	3.47	2.98	2.62	2.34	2.12	1.94	1.80	1.67	1.56	1.47
10	6.12	5.04	4.23	3.59	3.09	2.68	2.35	2.07	1.84	1.65	1.48	1.34
25	7.10	5.89	4.95	4.22	3.63	3.16	2.77	2.45	2.17	1.94	1.75	1.58
50	7.88	6.54	5.51	4.70	4.05	3.52	3.09	2.73	2.42	2.17	1.95	1.76
100	8.66	7.21	6.09	5.20	4.48	3.90	3.42	3.02	2.69	2.40	2.16	1.95

Tc = time in minutes. Values may exceed 60.

hase 2)\ESCPG-2\PPP\02 SCRO\07 PCSM\Attach 4 Stormwater Calcs\Charger\Hydraflow Rev 1\Charger Precip.pc

# Watershed Model Schematic

Hydraflow Hydrographs Extension for AutoCAD® Civil 3D® 2015 by Autodesk, Inc. v10.4

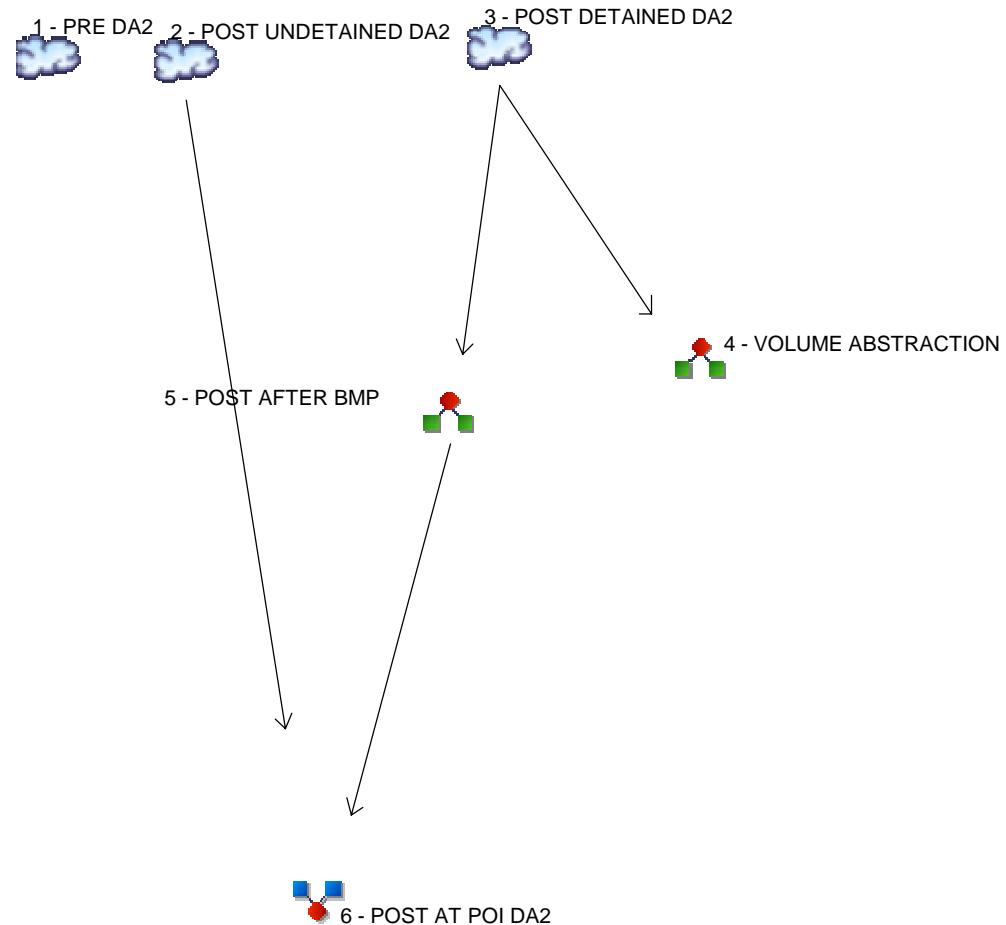

## Legend

### Hyd. Origin      Description

1	SCS Runoff	PRE DA2
2	SCS Runoff	POST UNDETAINED DA2
3	SCS Runoff	POST DETAINED DA2
4	Diversion1	VOLUME ABSTRACTION
5	Diversion2	POST AFTER BMP
6	Combine	POST AT POI DA2

# Hydrograph Return Period Recap

Hydraflow Hydrographs Extension for AutoCAD® Civil 3D® 2015 by Autodesk, Inc. v10.4

Hyd. No.	Hydrograph type (origin)	Inflow hyd(s)	Peak Outflow (cfs)								Hydrograph Description
			1-yr	2-yr	3-yr	5-yr	10-yr	25-yr	50-yr	100-yr	
1	SCS Runoff	----	-----	0.126	-----	-----	-----	-----	-----	-----	PRE DA2
2	SCS Runoff	----	-----	0.099	-----	-----	-----	-----	-----	-----	POST UNDETAINED DA2
3	SCS Runoff	----	-----	0.022	-----	-----	-----	-----	-----	-----	POST DETAINED DA2
4	Diversion1	3	-----	0.022	-----	-----	-----	-----	-----	-----	VOLUME ABSTRACTION
5	Diversion2	3	-----	0.001	-----	-----	-----	-----	-----	-----	POST AFTER BMP
6	Combine	2, 5	-----	0.099	-----	-----	-----	-----	-----	-----	POST AT POI DA2

# Hydrograph Summary Report

Hydraflow Hydrographs Extension for AutoCAD® Civil 3D® 2015 by Autodesk, Inc. v10.4

Hyd. No.	Hydrograph type (origin)	Peak flow (cfs)	Time interval (min)	Time to Peak (min)	Hyd. volume (cuft)	Inflow hyd(s)	Maximum elevation (ft)	Total strge used (cuft)	Hydrograph Description
1	SCS Runoff	0.126	2	720	312	-----	-----	-----	PRE DA2
2	SCS Runoff	0.099	2	720	238	-----	-----	-----	POST UNDETAINED DA2
3	SCS Runoff	0.022	2	742	134	-----	-----	-----	POST DETAINED DA2
4	Diversion1	0.022	2	742	130	3	-----	-----	VOLUME ABSTRACTION
5	Diversion2	0.001	2	1398	4	3	-----	-----	POST AFTER BMP
6	Combine	0.099	2	720	242	2, 5	-----	-----	POST AT POI DA2

# Hydrograph Report

Hydraflow Hydrographs Extension for AutoCAD® Civil 3D® 2015 by Autodesk, Inc. v10.4


Sunday, 11 / 6 / 2016

## Hyd. No. 1

PRE DA2

Hydrograph type	= SCS Runoff	Peak discharge	= 0.126 cfs
Storm frequency	= 2 yrs	Time to peak	= 12.00 hrs
Time interval	= 2 min	Hyd. volume	= 312 cuft
Drainage area	= 0.150 ac	Curve number	= 71*
Basin Slope	= 0.0 %	Hydraulic length	= 0 ft
Tc method	= TR55	Time of conc. (Tc)	= 8.40 min
Total precip.	= 2.66 in	Distribution	= Type II
Storm duration	= 24 hrs	Shape factor	= 484

\* Composite (Area/CN) = [(0.090 x 71) + (0.060 x 70)] / 0.150

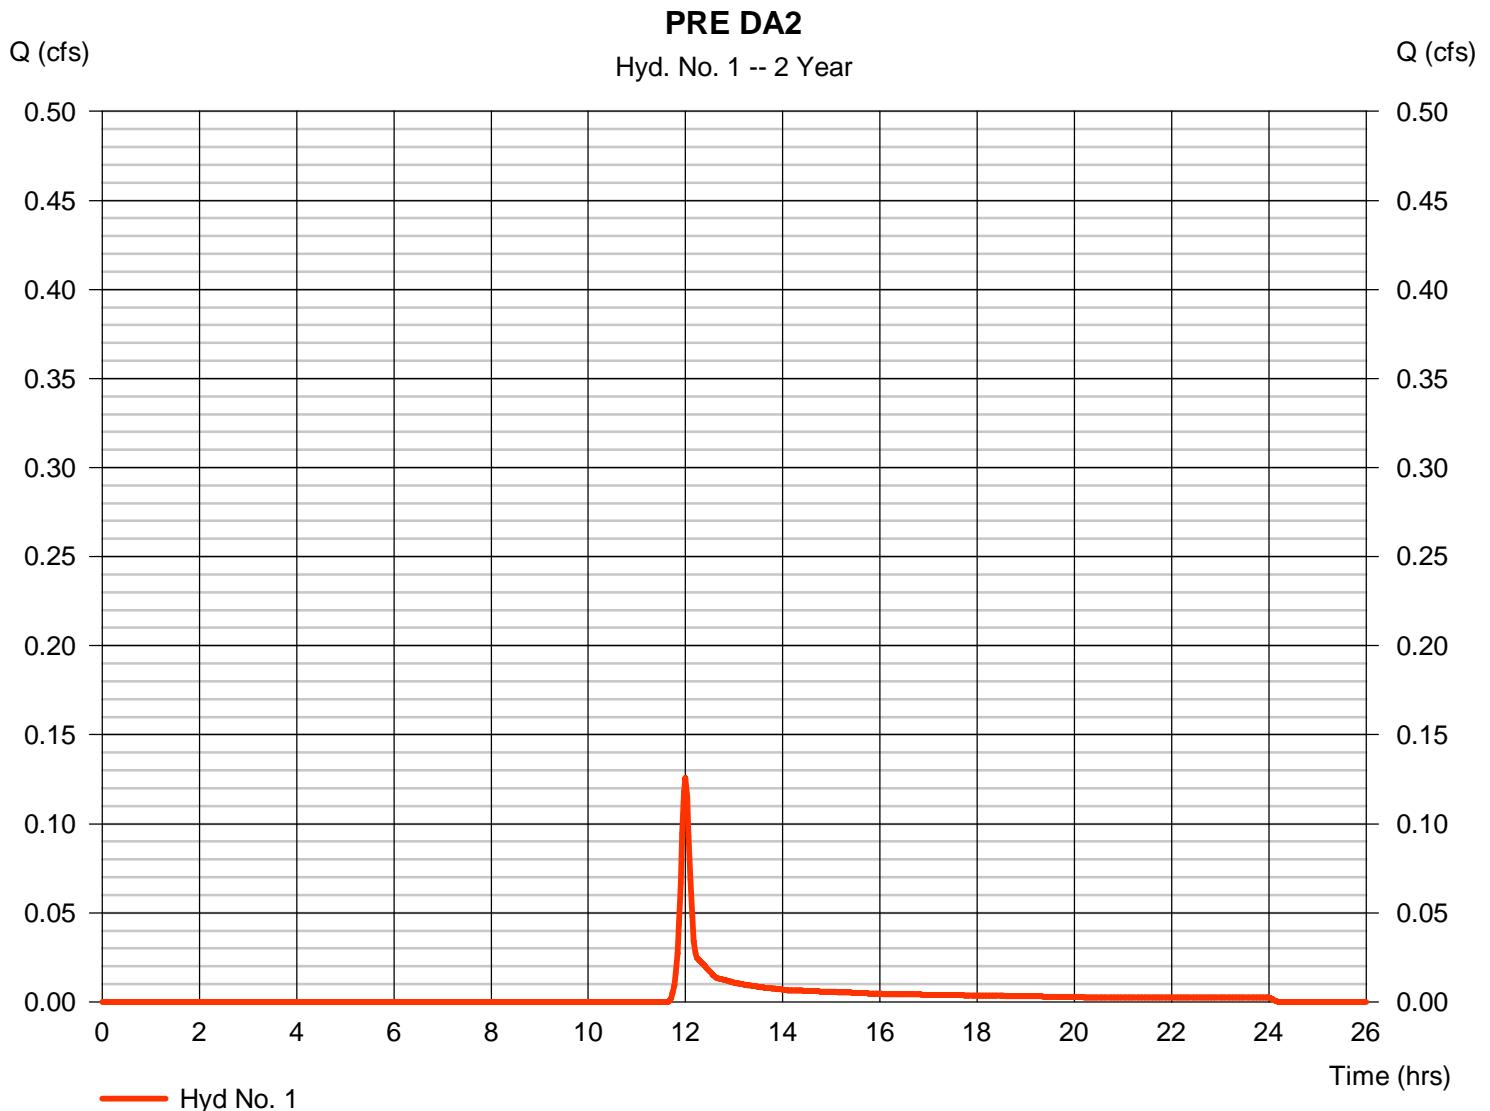

# TR55 Tc Worksheet

Hydraflow Hydrographs Extension for AutoCAD® Civil 3D® 2015 by Autodesk, Inc. v10.4

## Hyd. No. 1

PRE DA2

<u>Description</u>	<u>A</u>	<u>B</u>	<u>C</u>	<u>Totals</u>	
<b>Sheet Flow</b>					
Manning's n-value	= 0.240	0.011	0.011		
Flow length (ft)	= 50.0	0.0	0.0		
Two-year 24-hr precip. (in)	= 2.66	0.00	0.00		
Land slope (%)	= 2.50	0.00	0.00		
<b>Travel Time (min)</b>	<b>= 8.22</b>	<b>+ 0.00</b>	<b>+ 0.00</b>	<b>=</b>	<b>8.22</b>
<b>Shallow Concentrated Flow</b>					
Flow length (ft)	= 31.00	0.00	0.00		
Watercourse slope (%)	= 2.20	0.00	0.00		
Surface description	= Unpaved	Paved	Paved		
Average velocity (ft/s)	= 2.39	0.00	0.00		
<b>Travel Time (min)</b>	<b>= 0.22</b>	<b>+ 0.00</b>	<b>+ 0.00</b>	<b>=</b>	<b>0.22</b>
<b>Channel Flow</b>					
X sectional flow area (sqft)	= 0.00	0.00	0.00		
Wetted perimeter (ft)	= 0.00	0.00	0.00		
Channel slope (%)	= 0.00	0.00	0.00		
Manning's n-value	= 0.035	0.015	0.015		
Velocity (ft/s)	= 0.00	0.00	0.00		
Flow length (ft)	({0}) 0.0	0.0	0.0		
<b>Travel Time (min)</b>	<b>= 0.00</b>	<b>+ 0.00</b>	<b>+ 0.00</b>	<b>=</b>	<b>0.00</b>
<b>Total Travel Time, Tc .....</b>					<b>8.40 min</b>

# Hydrograph Report

Hydraflow Hydrographs Extension for AutoCAD® Civil 3D® 2015 by Autodesk, Inc. v10.4

Sunday, 11 / 6 / 2016

## Hyd. No. 2


### POST UNDETAINED DA2

Hydrograph type	= SCS Runoff	Peak discharge	= 0.099 cfs
Storm frequency	= 2 yrs	Time to peak	= 12.00 hrs
Time interval	= 2 min	Hyd. volume	= 238 cuft
Drainage area	= 0.100 ac	Curve number	= 73*
Basin Slope	= 0.0 %	Hydraulic length	= 0 ft
Tc method	= TR55	Time of conc. (Tc)	= 8.40 min
Total precip.	= 2.66 in	Distribution	= Type II
Storm duration	= 24 hrs	Shape factor	= 484

\* Composite (Area/CN) = [(0.010 x 89) + (0.070 x 71) + (0.020 x 70)] / 0.100

### POST UNDETAINED DA2

Hyd. No. 2 -- 2 Year

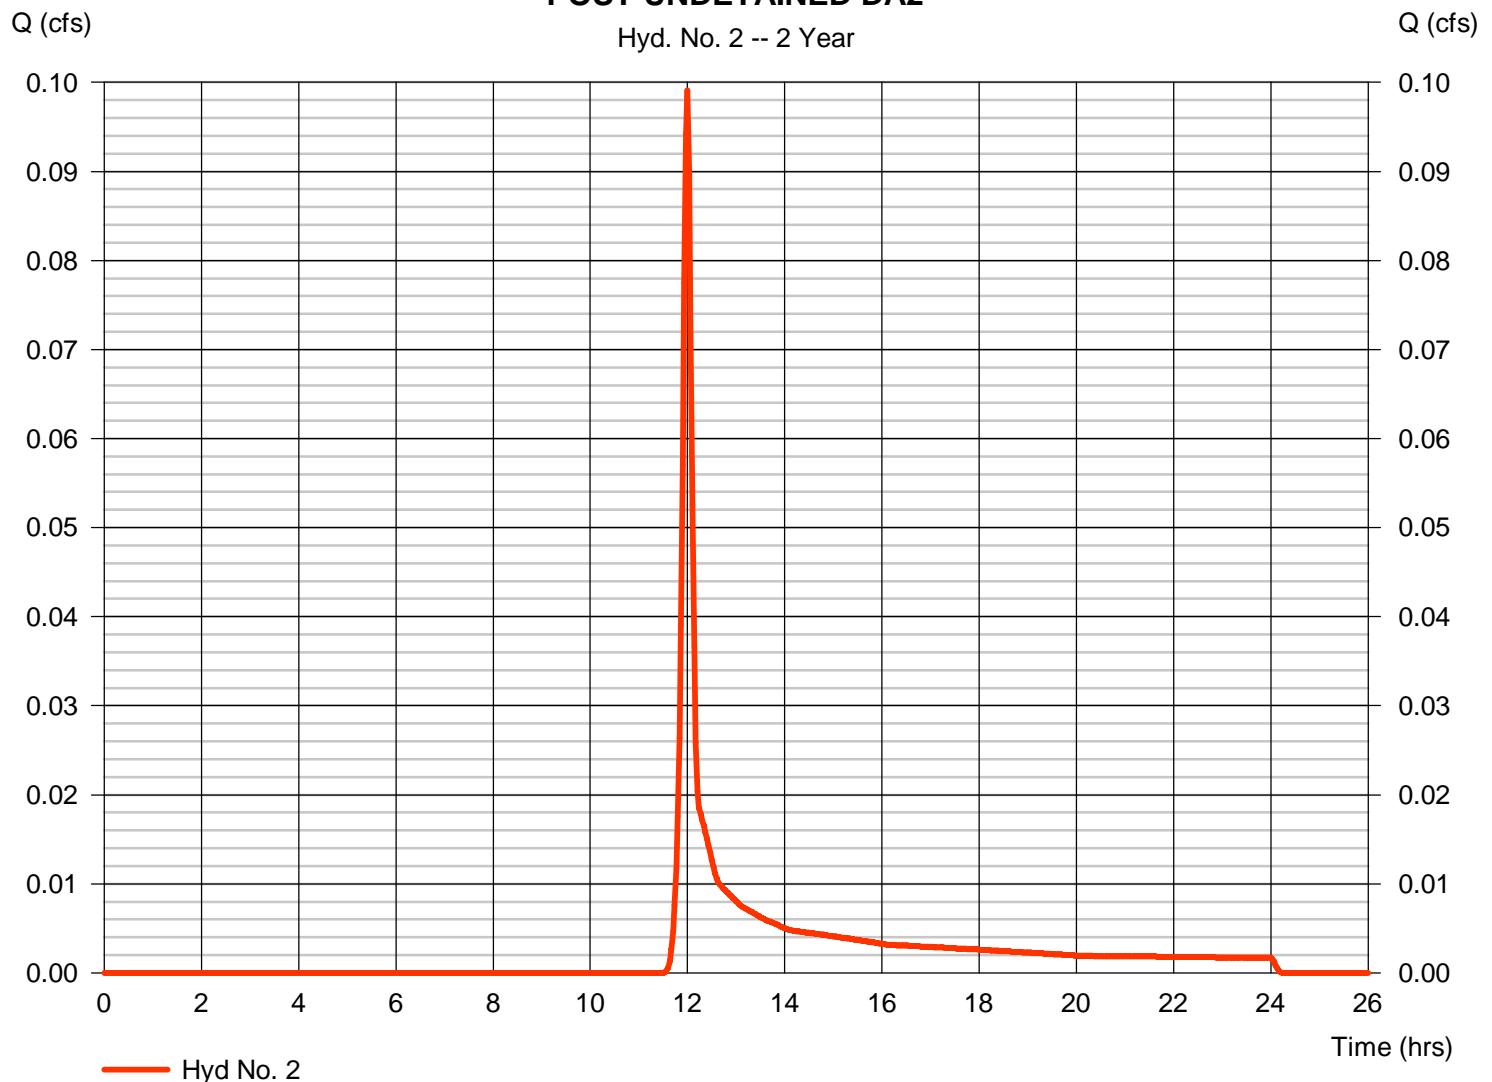

# TR55 Tc Worksheet

Hydraflow Hydrographs Extension for AutoCAD® Civil 3D® 2015 by Autodesk, Inc. v10.4

## Hyd. No. 2

POST UNDETAINED DA2

<u>Description</u>	<u>A</u>	<u>B</u>	<u>C</u>	<u>Totals</u>	
<b>Sheet Flow</b>					
Manning's n-value	= 0.240	0.011	0.011		
Flow length (ft)	= 50.0	0.0	0.0		
Two-year 24-hr precip. (in)	= 2.66	0.00	0.00		
Land slope (%)	= 2.50	0.00	0.00		
<b>Travel Time (min)</b>	<b>= 8.22</b>	<b>+ 0.00</b>	<b>+ 0.00</b>	<b>=</b>	<b>8.22</b>
<b>Shallow Concentrated Flow</b>					
Flow length (ft)	= 31.00	0.00	0.00		
Watercourse slope (%)	= 2.20	0.00	0.00		
Surface description	= Unpaved	Paved	Paved		
Average velocity (ft/s)	= 2.39	0.00	0.00		
<b>Travel Time (min)</b>	<b>= 0.22</b>	<b>+ 0.00</b>	<b>+ 0.00</b>	<b>=</b>	<b>0.22</b>
<b>Channel Flow</b>					
X sectional flow area (sqft)	= 0.00	0.00	0.00		
Wetted perimeter (ft)	= 0.00	0.00	0.00		
Channel slope (%)	= 0.00	0.00	0.00		
Manning's n-value	= 0.035	0.015	0.015		
Velocity (ft/s)	= 0.00	0.00	0.00		
Flow length (ft)	({0}) 0.0	0.0	0.0		
<b>Travel Time (min)</b>	<b>= 0.00</b>	<b>+ 0.00</b>	<b>+ 0.00</b>	<b>=</b>	<b>0.00</b>
<b>Total Travel Time, Tc .....</b>					<b>8.40 min</b>

# Hydrograph Report

Hydraflow Hydrographs Extension for AutoCAD® Civil 3D® 2015 by Autodesk, Inc. v10.4

Sunday, 11 / 6 / 2016

## Hyd. No. 3


### POST DETAINED DA2

Hydrograph type	= SCS Runoff	Peak discharge	= 0.022 cfs
Storm frequency	= 2 yrs	Time to peak	= 12.37 hrs
Time interval	= 2 min	Hyd. volume	= 134 cuft
Drainage area	= 0.050 ac	Curve number	= 75*
Basin Slope	= 0.0 %	Hydraulic length	= 0 ft
Tc method	= User	Time of conc. (Tc)	= 44.50 min
Total precip.	= 2.66 in	Distribution	= Type II
Storm duration	= 24 hrs	Shape factor	= 484

\* Composite (Area/CN) = [(0.010 x 89) + (0.040 x 71)] / 0.050

### POST DETAINED DA2

Hyd. No. 3 -- 2 Year

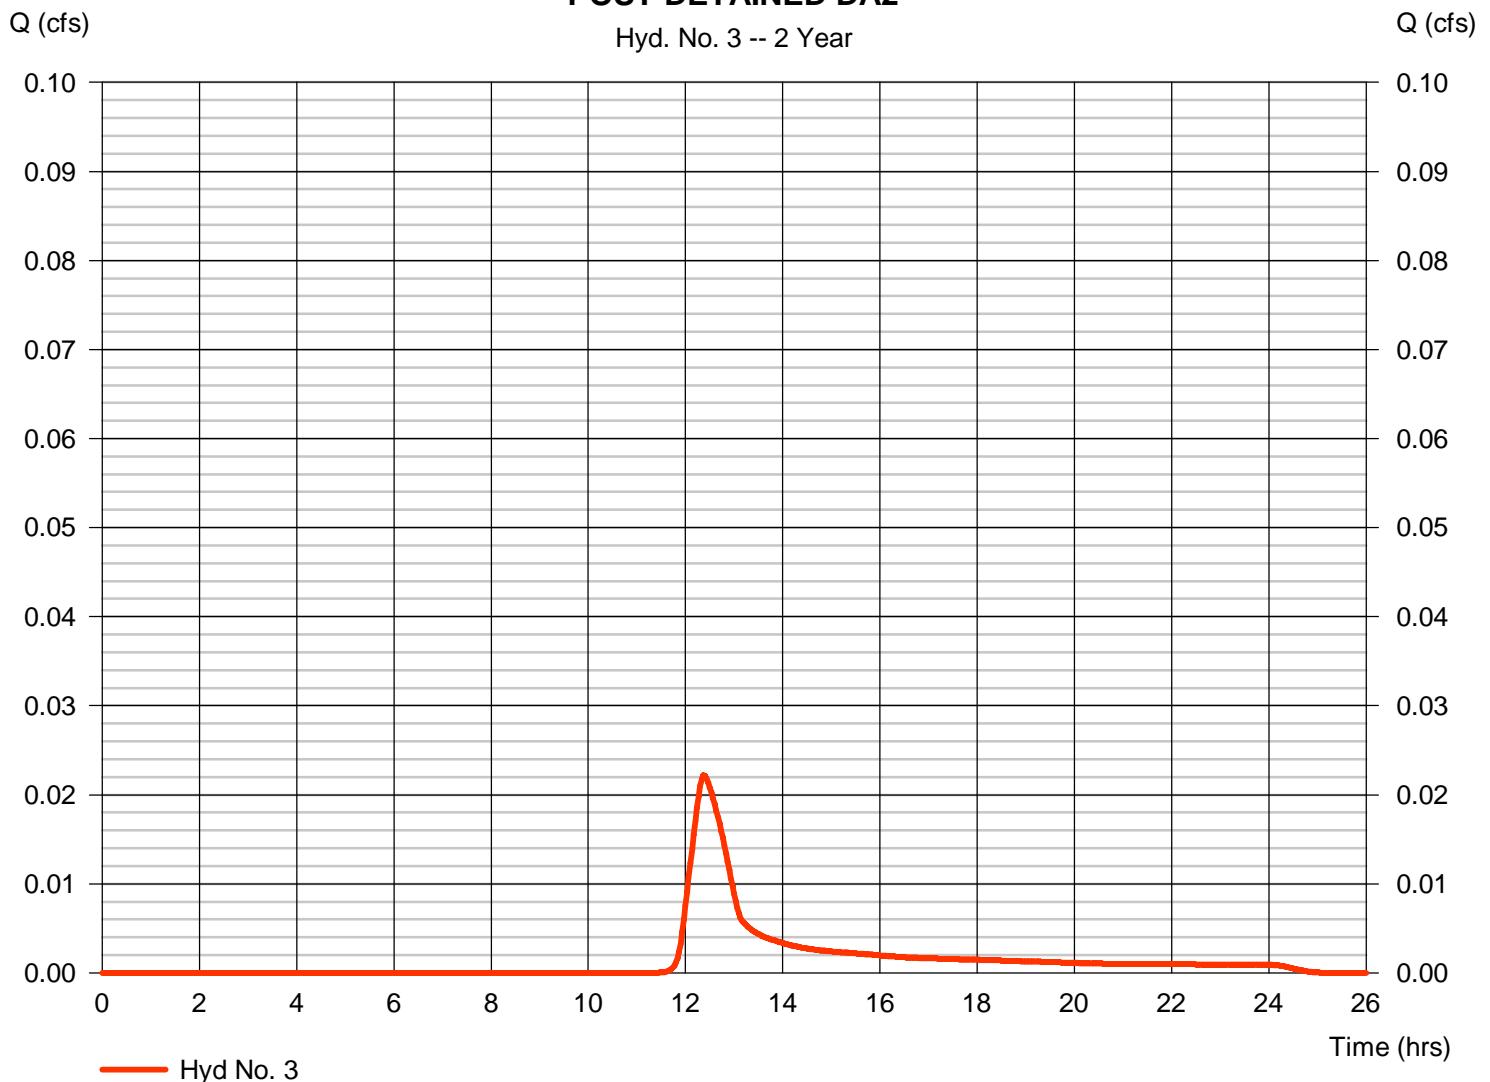

# Hydrograph Report


Hydraflow Hydrographs Extension for AutoCAD® Civil 3D® 2015 by Autodesk, Inc. v10.4

Sunday, 11 / 6 / 2016

## Hyd. No. 4

### VOLUME ABSTRACTION

Hydrograph type	= Diversion1	Peak discharge	= 0.022 cfs
Storm frequency	= 2 yrs	Time to peak	= 12.37 hrs
Time interval	= 2 min	Hyd. volume	= 130 cuft
Inflow hydrograph	= 3 - POST DETAINED DA2	2nd diverted hyd.	= 5
Diversion method	= First Flush Volume	Volume Up To	= 130.00 cuft

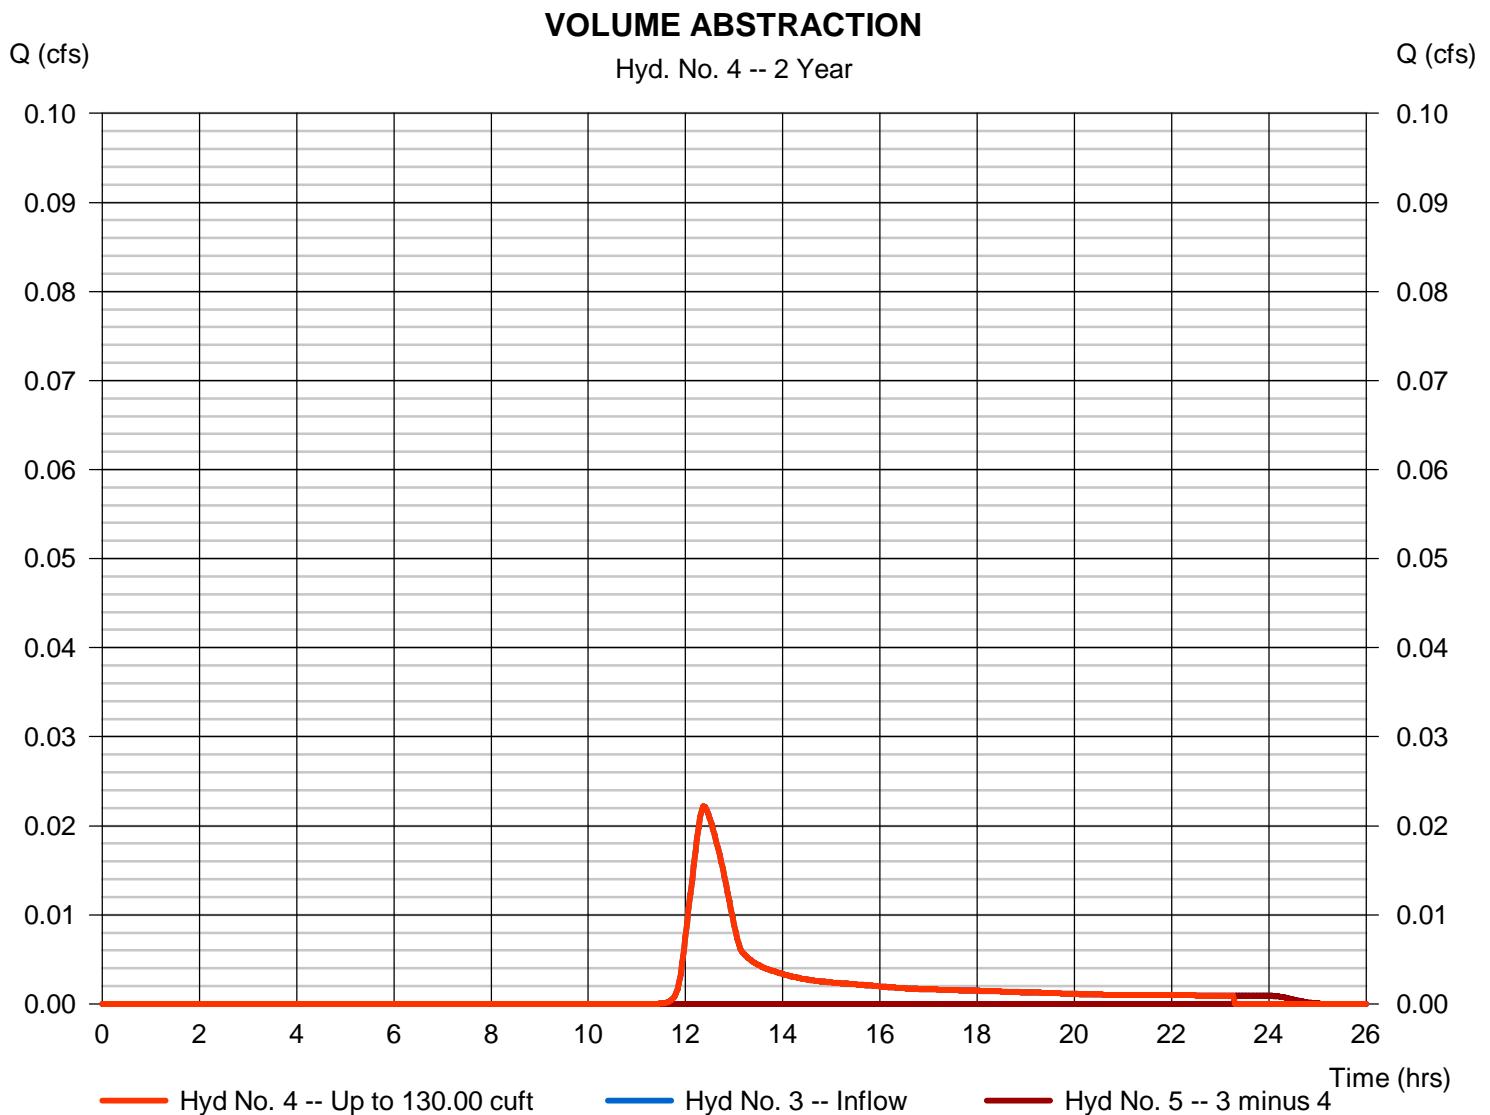

# Hydrograph Report


Hydraflow Hydrographs Extension for AutoCAD® Civil 3D® 2015 by Autodesk, Inc. v10.4

Sunday, 11 / 6 / 2016

## Hyd. No. 5

### POST AFTER BMP

Hydrograph type	= Diversion2	Peak discharge	= 0.001 cfs
Storm frequency	= 2 yrs	Time to peak	= 23.30 hrs
Time interval	= 2 min	Hyd. volume	= 4 cuft
Inflow hydrograph	= 3 - POST DETAINED DA2	2nd diverted hyd.	= 4
Diversion method	= First Flush Volume	Volume Up To	= 130.00 cuft

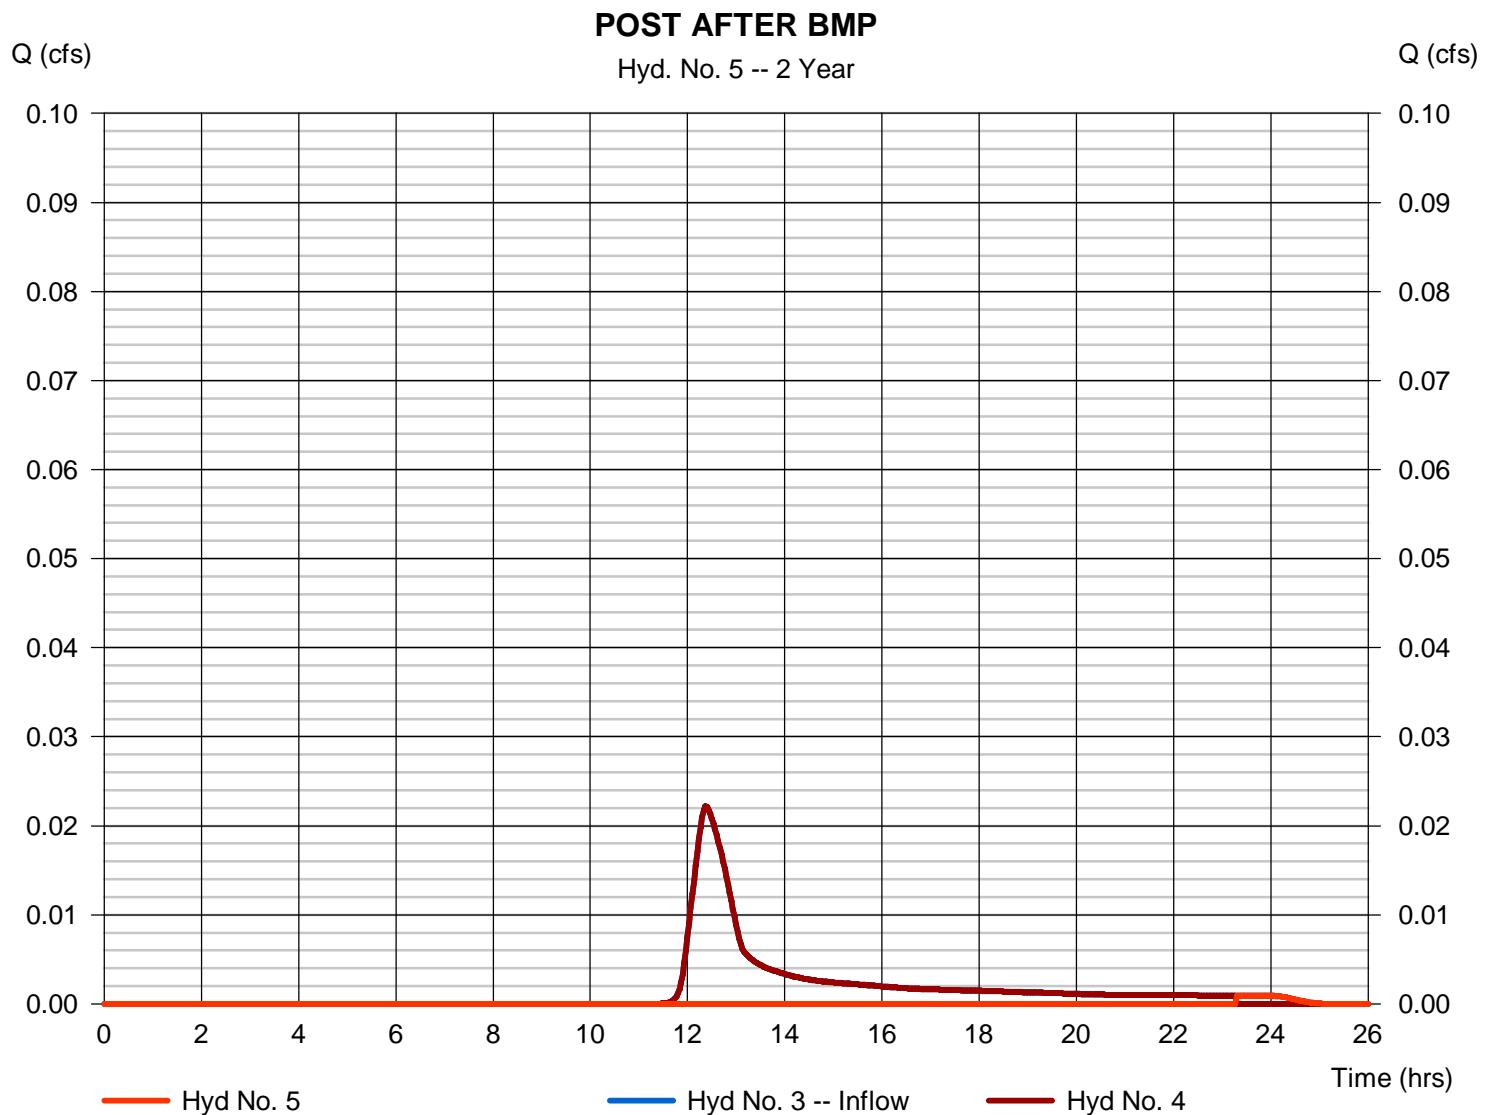

# Hydrograph Report


Hydraflow Hydrographs Extension for AutoCAD® Civil 3D® 2015 by Autodesk, Inc. v10.4

Sunday, 11 / 6 / 2016

## Hyd. No. 6

### POST AT POI DA2

Hydrograph type	= Combine	Peak discharge	= 0.099 cfs
Storm frequency	= 2 yrs	Time to peak	= 12.00 hrs
Time interval	= 2 min	Hyd. volume	= 242 cuft
Inflow hyds.	= 2, 5	Contrib. drain. area	= 0.100 ac

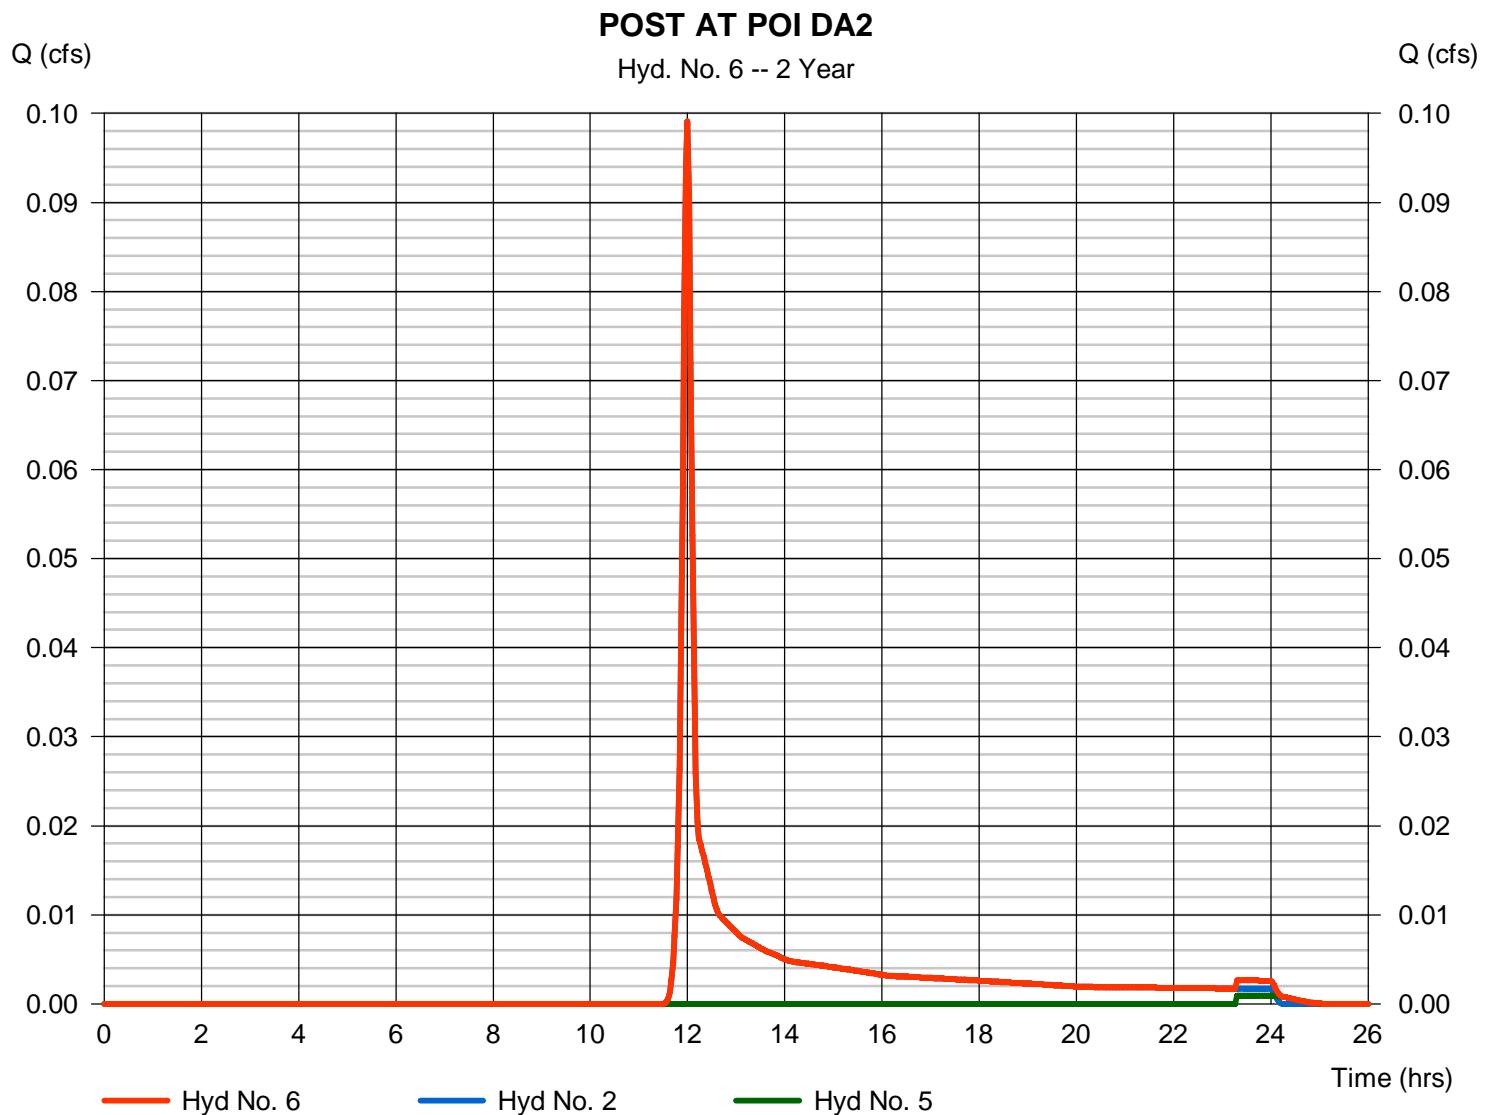

# Hydraflow Rainfall Report

Return Period (Yrs)	Intensity-Duration-Frequency Equation Coefficients (FHA)			
	B	D	E	(N/A)
1	39.9938	10.0000	0.8826	-----
2	46.8600	10.1000	0.8723	-----
3	0.0000	0.0000	0.0000	-----
5	47.4204	9.3000	0.8196	-----
10	26589.4199	47.3998	2.1160	-----
25	53942.1797	51.5998	2.2139	-----
50	69308.7266	52.6998	2.2395	-----
100	106327.6016	55.1997	2.2977	-----

File name: Charger IDF.IDF

$$\text{Intensity} = B / (T_c + D)^E$$


Return Period (Yrs)	Intensity Values (in/hr)											
	5 min	10	15	20	25	30	35	40	45	50	55	60
1	3.66	2.84	2.33	1.99	1.73	1.54	1.39	1.27	1.16	1.08	1.00	0.94
2	4.39	3.42	2.82	2.40	2.10	1.87	1.69	1.54	1.42	1.32	1.23	1.15
3	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
5	5.36	4.19	3.47	2.98	2.62	2.34	2.12	1.94	1.80	1.67	1.56	1.47
10	6.12	5.04	4.23	3.59	3.09	2.68	2.35	2.07	1.84	1.65	1.48	1.34
25	7.10	5.89	4.95	4.22	3.63	3.16	2.77	2.45	2.17	1.94	1.75	1.58
50	7.88	6.54	5.51	4.70	4.05	3.52	3.09	2.73	2.42	2.17	1.95	1.76
100	8.66	7.21	6.09	5.20	4.48	3.90	3.42	3.02	2.69	2.40	2.16	1.95

Tc = time in minutes. Values may exceed 60.

ESCGP-2\PPP\02 SCRO\07 PCSM\Attach 4 Stormwater Calcs\Charger\Hydraflow Rev 1\Charger Precip.pc

# Watershed Model Schematic

Hydraflow Hydrographs Extension for AutoCAD® Civil 3D® 2015 by Autodesk, Inc. v10.4

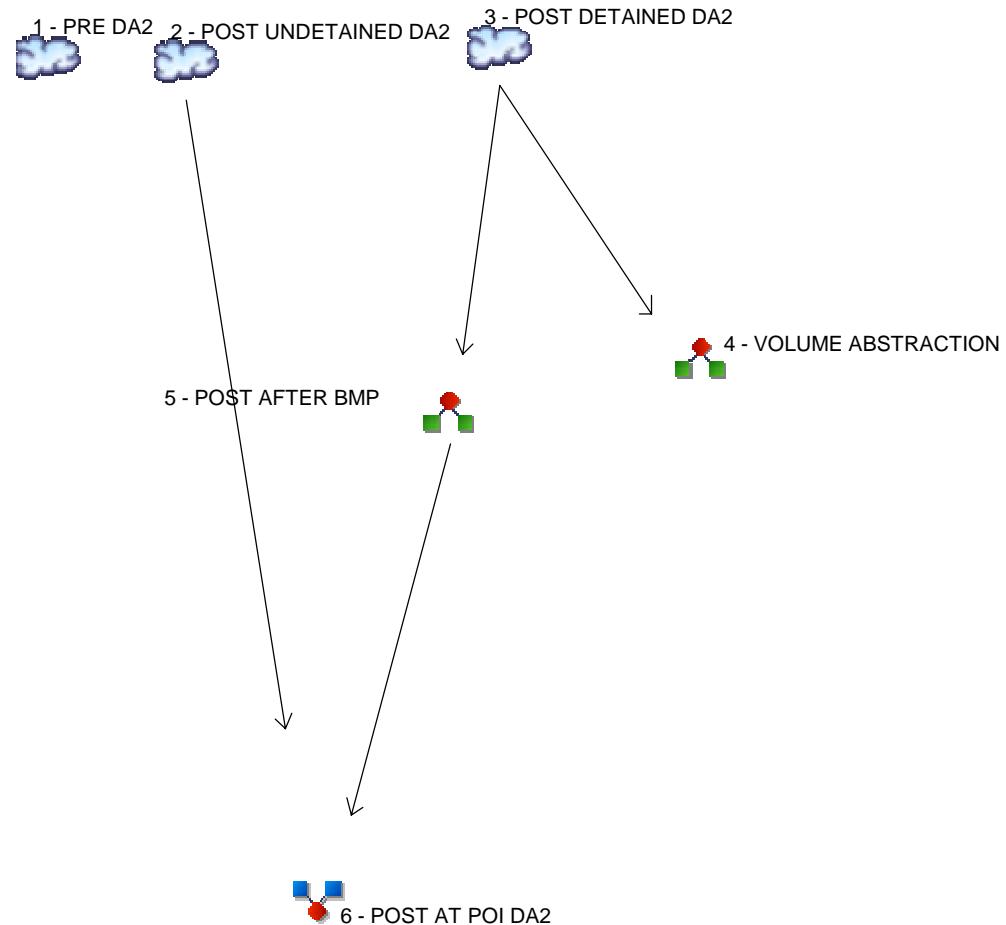

## Legend

### Hyd. Origin      Description

1	SCS Runoff	PRE DA2
2	SCS Runoff	POST UNDETAINED DA2
3	SCS Runoff	POST DETAINED DA2
4	Diversion1	VOLUME ABSTRACTION
5	Diversion2	POST AFTER BMP
6	Combine	POST AT POI DA2

# Hydrograph Return Period Recap

HydraFlow Hydrographs Extension for AutoCAD® Civil 3D® 2015 by Autodesk, Inc. v10.4

Hyd. No.	Hydrograph type (origin)	Inflow hyd(s)	Peak Outflow (cfs)								Hydrograph Description
			1-yr	2-yr	3-yr	5-yr	10-yr	25-yr	50-yr	100-yr	
1	SCS Runoff	-----	-----	-----	-----	-----	0.302	-----	-----	-----	PRE DA2
2	SCS Runoff	-----	-----	-----	-----	-----	0.222	-----	-----	-----	POST UNDETAINED DA2
3	SCS Runoff	-----	-----	-----	-----	-----	0.073	-----	-----	-----	POST DETAINED DA2
4	Diversion1	3	-----	-----	-----	-----	0.073	-----	-----	-----	VOLUME ABSTRACTION
5	Diversion2	3	-----	-----	-----	-----	0.027	-----	-----	-----	POST AFTER BMP
6	Combine	2, 5	-----	-----	-----	-----	0.222	-----	-----	-----	POST AT POI DA2

# Hydrograph Summary Report

Hydraflow Hydrographs Extension for AutoCAD® Civil 3D® 2015 by Autodesk, Inc. v10.4

Hyd. No.	Hydrograph type (origin)	Peak flow (cfs)	Time interval (min)	Time to Peak (min)	Hyd. volume (cuft)	Inflow hyd(s)	Maximum elevation (ft)	Total strge used (cuft)	Hydrograph Description
1	SCS Runoff	0.302	2	720	696	-----	-----	-----	PRE DA2
2	SCS Runoff	0.222	2	720	511	-----	-----	-----	POST UNDETAINED DA2
3	SCS Runoff	0.073	2	730	275	-----	-----	-----	POST DETAINED DA2
4	Diversion1	0.073	2	730	131	3	-----	-----	VOLUME ABSTRACTION
5	Diversion2	0.027	2	750	145	3	-----	-----	POST AFTER BMP
6	Combine	0.222	2	720	655	2, 5	-----	-----	POST AT POI DA2

# Hydrograph Report

Hydraflow Hydrographs Extension for AutoCAD® Civil 3D® 2015 by Autodesk, Inc. v10.4


Sunday, 11 / 6 / 2016

## Hyd. No. 1

PRE DA2

Hydrograph type	= SCS Runoff	Peak discharge	= 0.302 cfs
Storm frequency	= 10 yrs	Time to peak	= 12.00 hrs
Time interval	= 2 min	Hyd. volume	= 696 cuft
Drainage area	= 0.150 ac	Curve number	= 71*
Basin Slope	= 0.0 %	Hydraulic length	= 0 ft
Tc method	= TR55	Time of conc. (Tc)	= 8.40 min
Total precip.	= 3.83 in	Distribution	= Type II
Storm duration	= 24 hrs	Shape factor	= 484

\* Composite (Area/CN) = [(0.090 x 71) + (0.060 x 70)] / 0.150

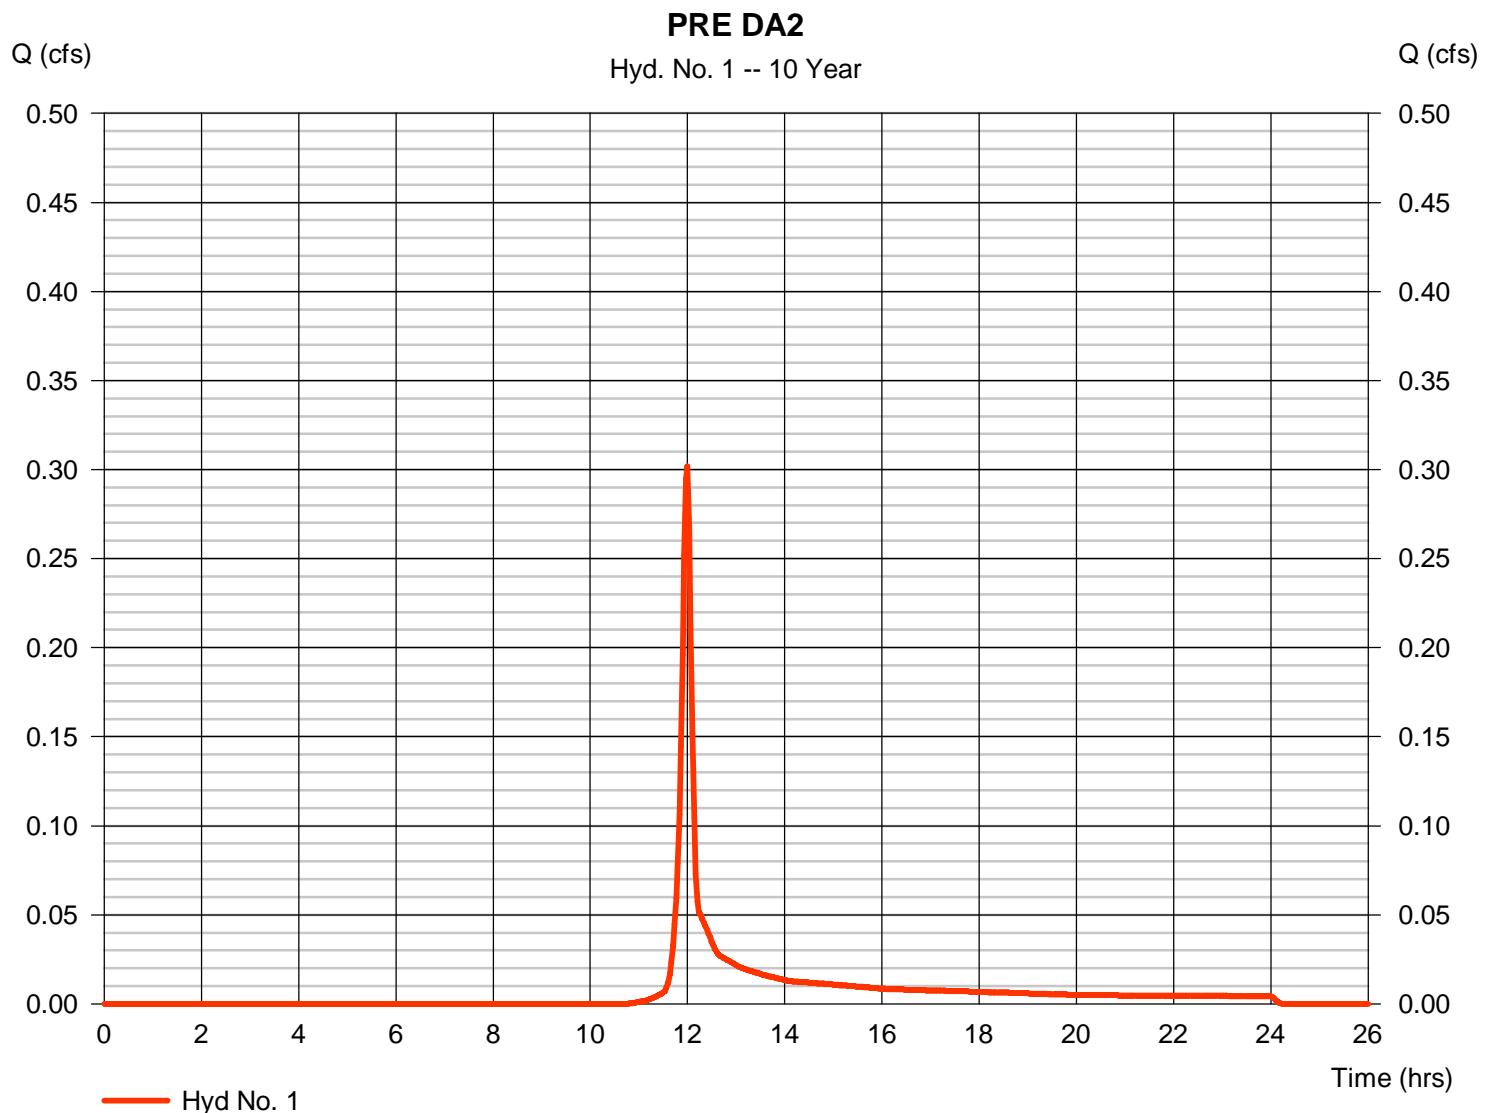

# TR55 Tc Worksheet

Hydraflow Hydrographs Extension for AutoCAD® Civil 3D® 2015 by Autodesk, Inc. v10.4

## Hyd. No. 1

PRE DA2

<u>Description</u>	<u>A</u>	<u>B</u>	<u>C</u>	<u>Totals</u>	
<b>Sheet Flow</b>					
Manning's n-value	= 0.240	0.011	0.011		
Flow length (ft)	= 50.0	0.0	0.0		
Two-year 24-hr precip. (in)	= 2.66	0.00	0.00		
Land slope (%)	= 2.50	0.00	0.00		
<b>Travel Time (min)</b>	<b>= 8.22</b>	<b>+ 0.00</b>	<b>+ 0.00</b>	<b>=</b>	<b>8.22</b>
<b>Shallow Concentrated Flow</b>					
Flow length (ft)	= 31.00	0.00	0.00		
Watercourse slope (%)	= 2.20	0.00	0.00		
Surface description	= Unpaved	Paved	Paved		
Average velocity (ft/s)	= 2.39	0.00	0.00		
<b>Travel Time (min)</b>	<b>= 0.22</b>	<b>+ 0.00</b>	<b>+ 0.00</b>	<b>=</b>	<b>0.22</b>
<b>Channel Flow</b>					
X sectional flow area (sqft)	= 0.00	0.00	0.00		
Wetted perimeter (ft)	= 0.00	0.00	0.00		
Channel slope (%)	= 0.00	0.00	0.00		
Manning's n-value	= 0.035	0.015	0.015		
Velocity (ft/s)	= 0.00	0.00	0.00		
Flow length (ft)	({0}) 0.0	0.0	0.0		
<b>Travel Time (min)</b>	<b>= 0.00</b>	<b>+ 0.00</b>	<b>+ 0.00</b>	<b>=</b>	<b>0.00</b>
<b>Total Travel Time, Tc .....</b>					<b>8.40 min</b>

# Hydrograph Report

## Hyd. No. 2


### POST UNDETAINED DA2

Hydrograph type	= SCS Runoff	Peak discharge	= 0.222 cfs
Storm frequency	= 10 yrs	Time to peak	= 12.00 hrs
Time interval	= 2 min	Hyd. volume	= 511 cuft
Drainage area	= 0.100 ac	Curve number	= 73*
Basin Slope	= 0.0 %	Hydraulic length	= 0 ft
Tc method	= TR55	Time of conc. (Tc)	= 8.40 min
Total precip.	= 3.83 in	Distribution	= Type II
Storm duration	= 24 hrs	Shape factor	= 484

\* Composite (Area/CN) = [(0.010 x 89) + (0.070 x 71) + (0.020 x 70)] / 0.100

### POST UNDETAINED DA2

Hyd. No. 2 -- 10 Year

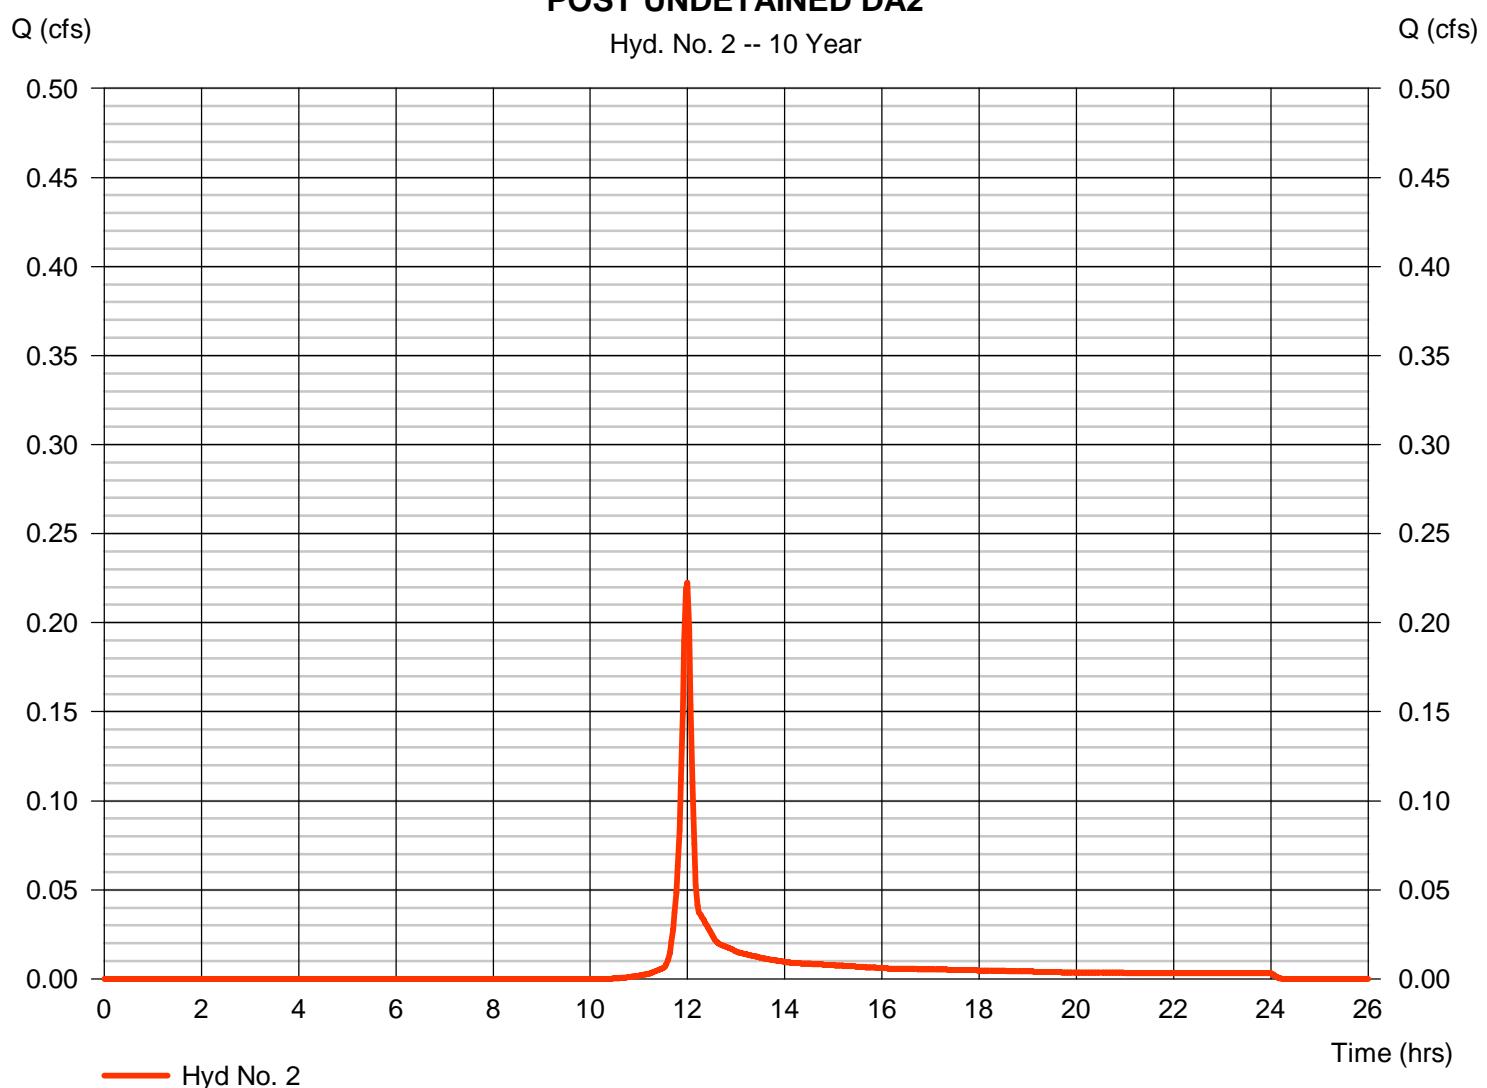

# TR55 Tc Worksheet

Hydraflow Hydrographs Extension for AutoCAD® Civil 3D® 2015 by Autodesk, Inc. v10.4

## Hyd. No. 2

POST UNDETAINED DA2

<u>Description</u>	<u>A</u>	<u>B</u>	<u>C</u>	<u>Totals</u>	
<b>Sheet Flow</b>					
Manning's n-value	= 0.240	0.011	0.011		
Flow length (ft)	= 50.0	0.0	0.0		
Two-year 24-hr precip. (in)	= 2.66	0.00	0.00		
Land slope (%)	= 2.50	0.00	0.00		
<b>Travel Time (min)</b>	<b>= 8.22</b>	<b>+ 0.00</b>	<b>+ 0.00</b>	<b>=</b>	<b>8.22</b>
<b>Shallow Concentrated Flow</b>					
Flow length (ft)	= 31.00	0.00	0.00		
Watercourse slope (%)	= 2.20	0.00	0.00		
Surface description	= Unpaved	Paved	Paved		
Average velocity (ft/s)	= 2.39	0.00	0.00		
<b>Travel Time (min)</b>	<b>= 0.22</b>	<b>+ 0.00</b>	<b>+ 0.00</b>	<b>=</b>	<b>0.22</b>
<b>Channel Flow</b>					
X sectional flow area (sqft)	= 0.00	0.00	0.00		
Wetted perimeter (ft)	= 0.00	0.00	0.00		
Channel slope (%)	= 0.00	0.00	0.00		
Manning's n-value	= 0.035	0.015	0.015		
Velocity (ft/s)	= 0.00	0.00	0.00		
Flow length (ft)	({0}) 0.0	0.0	0.0		
<b>Travel Time (min)</b>	<b>= 0.00</b>	<b>+ 0.00</b>	<b>+ 0.00</b>	<b>=</b>	<b>0.00</b>
<b>Total Travel Time, Tc .....</b>					<b>8.40 min</b>

# Hydrograph Report

Hydraflow Hydrographs Extension for AutoCAD® Civil 3D® 2015 by Autodesk, Inc. v10.4


Sunday, 11 / 6 / 2016

## Hyd. No. 3

### POST DETAINED DA2

Hydrograph type	= SCS Runoff	Peak discharge	= 0.073 cfs
Storm frequency	= 10 yrs	Time to peak	= 12.17 hrs
Time interval	= 2 min	Hyd. volume	= 275 cuft
Drainage area	= 0.050 ac	Curve number	= 75*
Basin Slope	= 0.0 %	Hydraulic length	= 0 ft
Tc method	= User	Time of conc. (Tc)	= 24.86 min
Total precip.	= 3.83 in	Distribution	= Type II
Storm duration	= 24 hrs	Shape factor	= 484

\* Composite (Area/CN) = [(0.010 x 89) + (0.040 x 71)] / 0.050

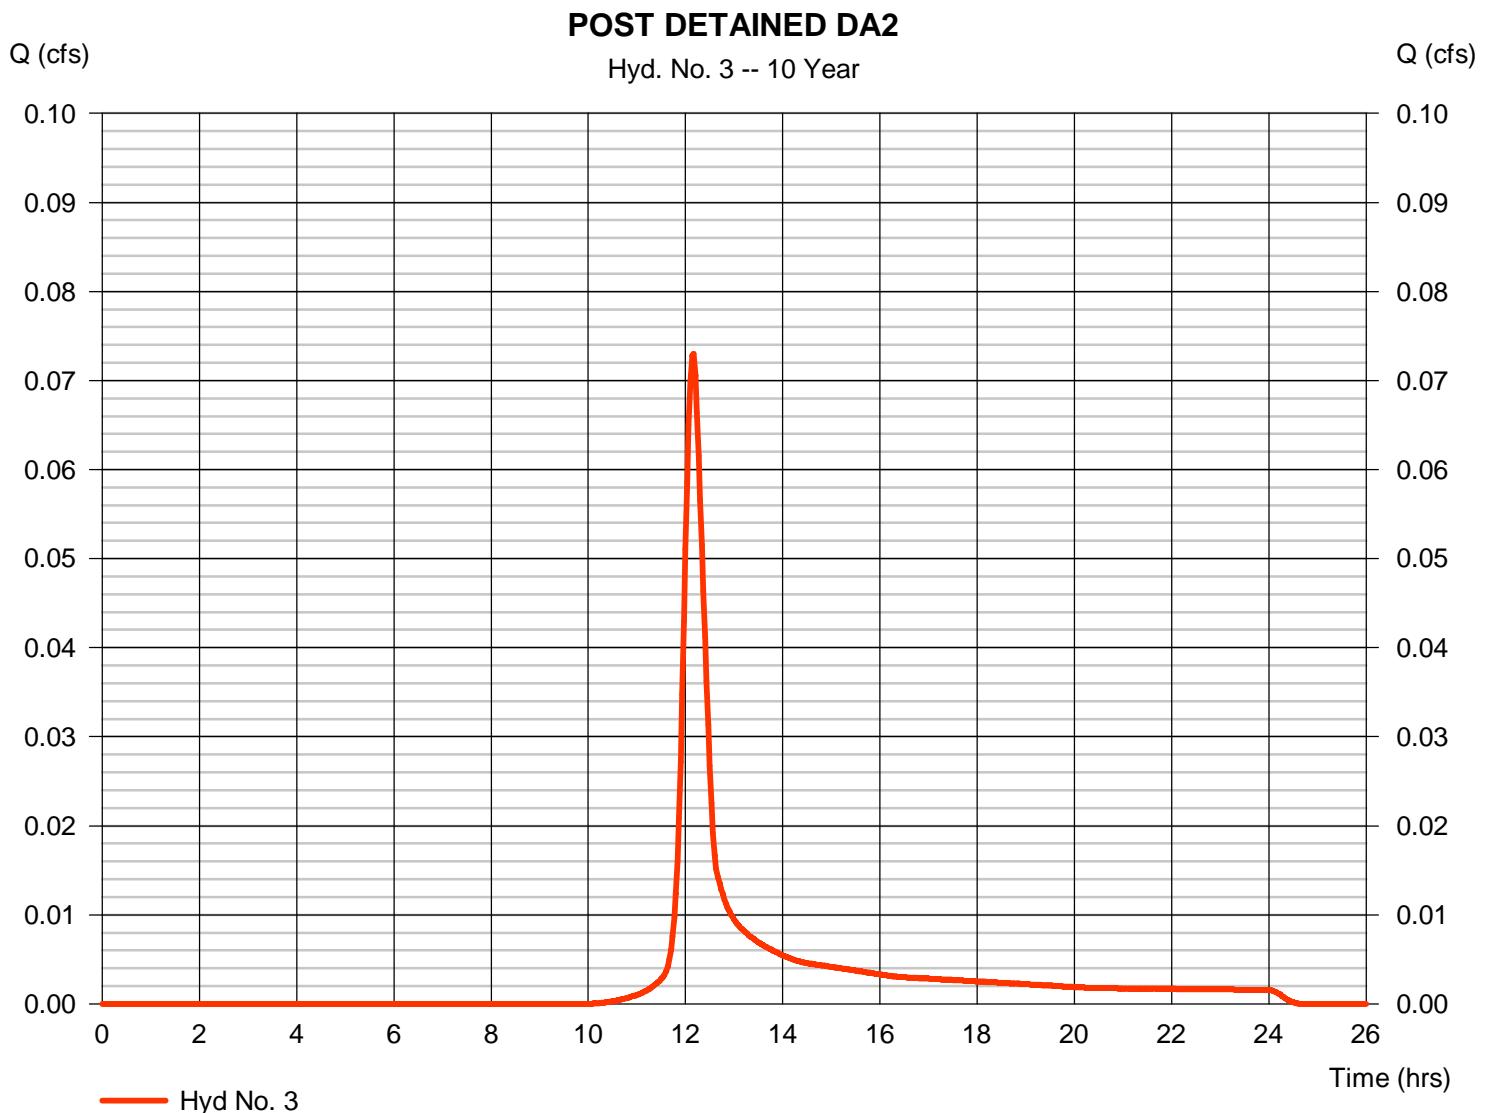


# Hydrograph Report

Hyd. No. 4

## VOLUME ABSTRACTION

Hydrograph type	= Diversion1	Peak discharge	= 0.073 cfs
Storm frequency	= 10 yrs	Time to peak	= 12.17 hrs
Time interval	= 2 min	Hyd. volume	= 131 cuft
Inflow hydrograph	= 3 - POST DETAINED DA2	2nd diverted hyd.	= 5
Diversion method	= First Flush Volume	Volume Up To	= 130.00 cuft

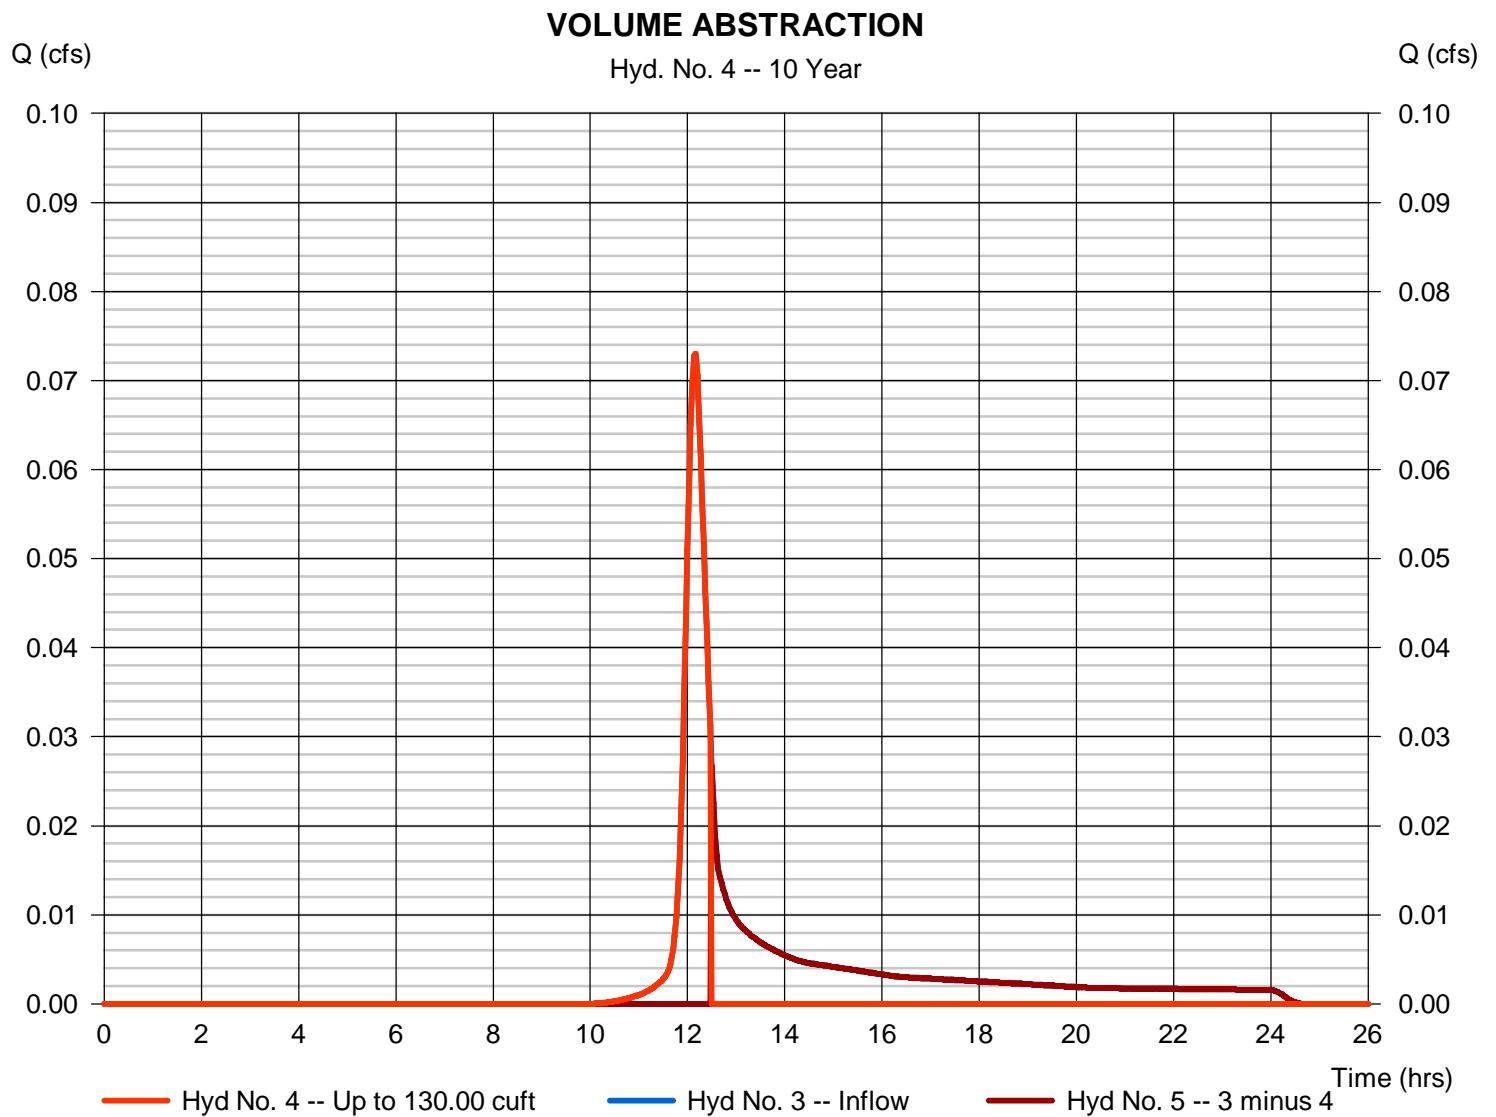

# Hydrograph Report


Hydraflow Hydrographs Extension for AutoCAD® Civil 3D® 2015 by Autodesk, Inc. v10.4

Sunday, 11 / 6 / 2016

## Hyd. No. 5

### POST AFTER BMP

Hydrograph type	= Diversion2	Peak discharge	= 0.027 cfs
Storm frequency	= 10 yrs	Time to peak	= 12.50 hrs
Time interval	= 2 min	Hyd. volume	= 145 cuft
Inflow hydrograph	= 3 - POST DETAINED DA2	2nd diverted hyd.	= 4
Diversion method	= First Flush Volume	Volume Up To	= 130.00 cuft

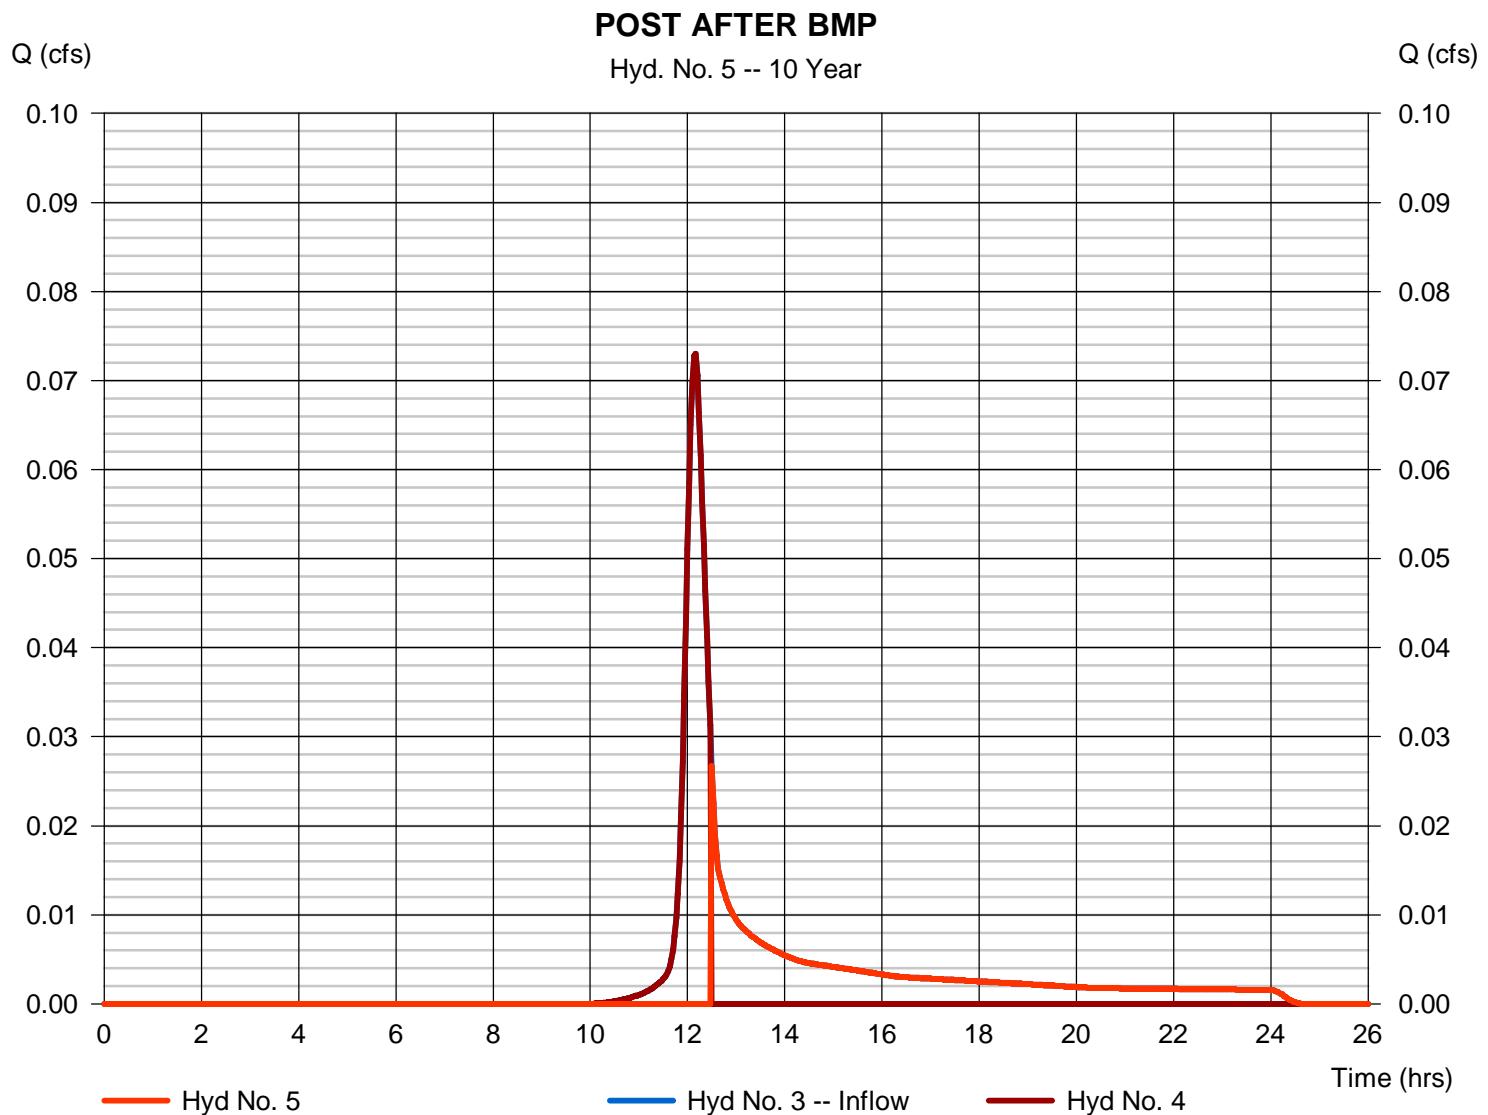

# Hydrograph Report


Hydraflow Hydrographs Extension for AutoCAD® Civil 3D® 2015 by Autodesk, Inc. v10.4

Sunday, 11 / 6 / 2016

## Hyd. No. 6

### POST AT POI DA2

Hydrograph type	= Combine	Peak discharge	= 0.222 cfs
Storm frequency	= 10 yrs	Time to peak	= 12.00 hrs
Time interval	= 2 min	Hyd. volume	= 655 cuft
Inflow hyds.	= 2, 5	Contrib. drain. area	= 0.100 ac

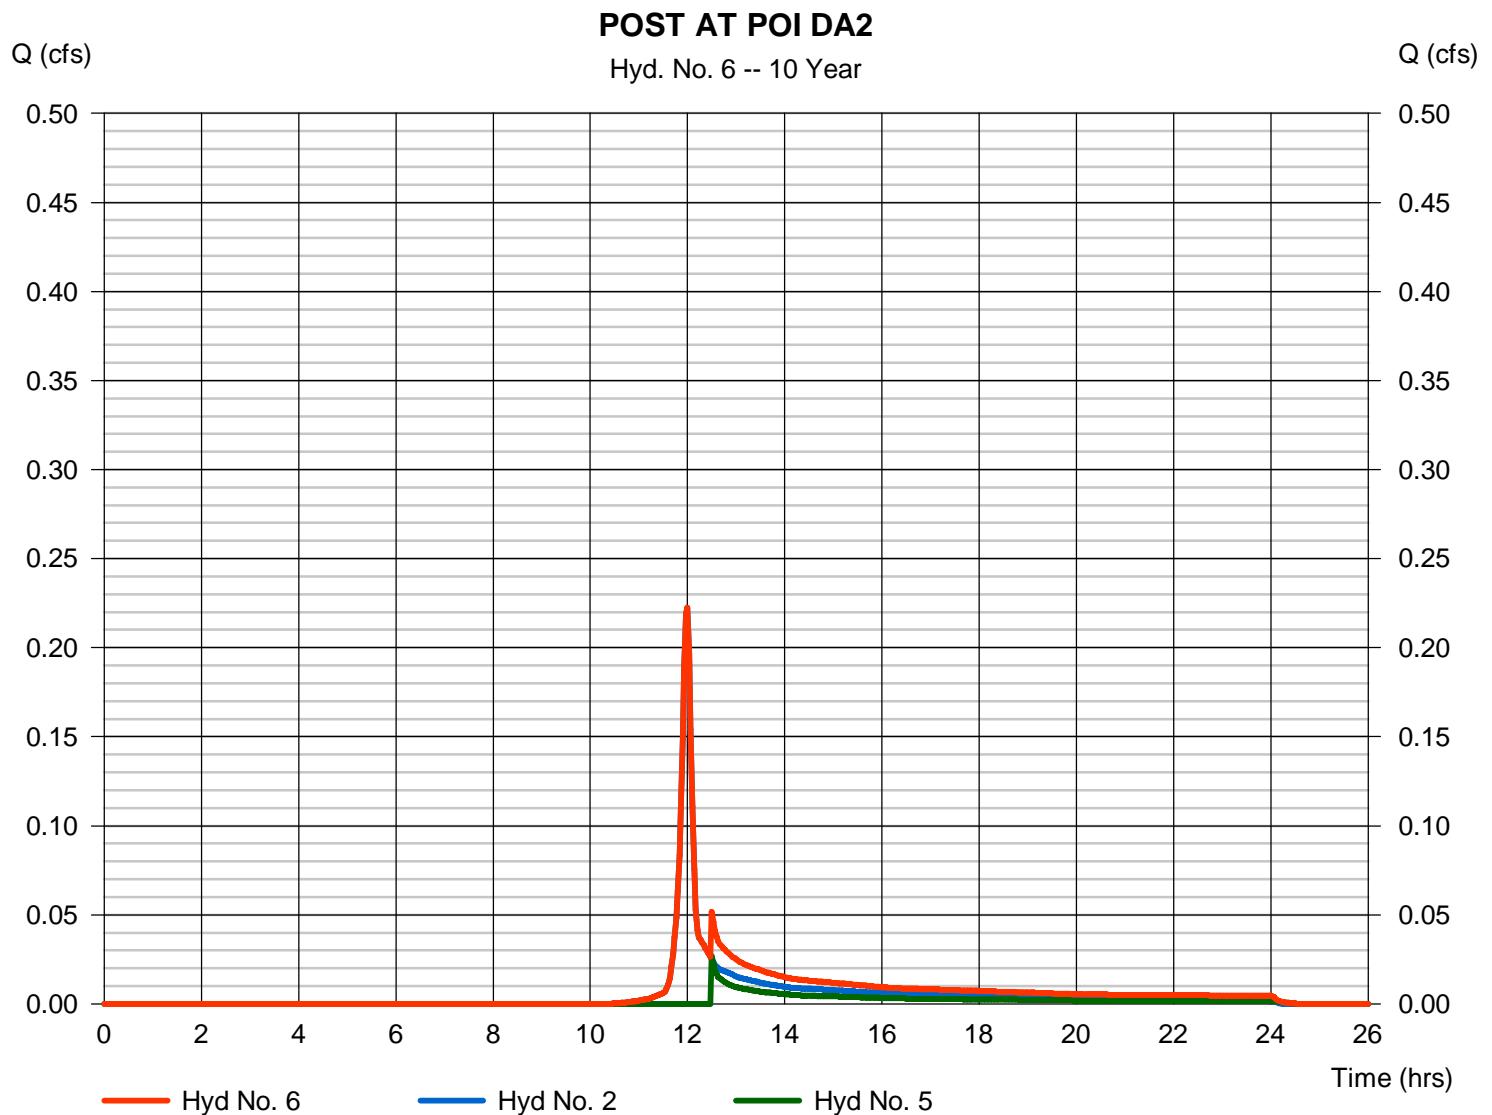

# Hydraflow Rainfall Report

Return Period (Yrs)	Intensity-Duration-Frequency Equation Coefficients (FHA)			
	B	D	E	(N/A)
1	39.9938	10.0000	0.8826	-----
2	46.8600	10.1000	0.8723	-----
3	0.0000	0.0000	0.0000	-----
5	47.4204	9.3000	0.8196	-----
10	26589.4199	47.3998	2.1160	-----
25	53942.1797	51.5998	2.2139	-----
50	69308.7266	52.6998	2.2395	-----
100	106327.6016	55.1997	2.2977	-----

File name: Charger IDF.IDF

$$\text{Intensity} = B / (T_c + D)^E$$


Return Period (Yrs)	Intensity Values (in/hr)											
	5 min	10	15	20	25	30	35	40	45	50	55	60
1	3.66	2.84	2.33	1.99	1.73	1.54	1.39	1.27	1.16	1.08	1.00	0.94
2	4.39	3.42	2.82	2.40	2.10	1.87	1.69	1.54	1.42	1.32	1.23	1.15
3	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
5	5.36	4.19	3.47	2.98	2.62	2.34	2.12	1.94	1.80	1.67	1.56	1.47
10	6.12	5.04	4.23	3.59	3.09	2.68	2.35	2.07	1.84	1.65	1.48	1.34
25	7.10	5.89	4.95	4.22	3.63	3.16	2.77	2.45	2.17	1.94	1.75	1.58
50	7.88	6.54	5.51	4.70	4.05	3.52	3.09	2.73	2.42	2.17	1.95	1.76
100	8.66	7.21	6.09	5.20	4.48	3.90	3.42	3.02	2.69	2.40	2.16	1.95

Tc = time in minutes. Values may exceed 60.

ESCGP-2\PPP\02 SCRO\07 PCSM\Attach 4 Stormwater Calcs\Charger\Hydraflow Rev 1\Charger Precip.pc

# Watershed Model Schematic

Hydraflow Hydrographs Extension for AutoCAD® Civil 3D® 2015 by Autodesk, Inc. v10.4

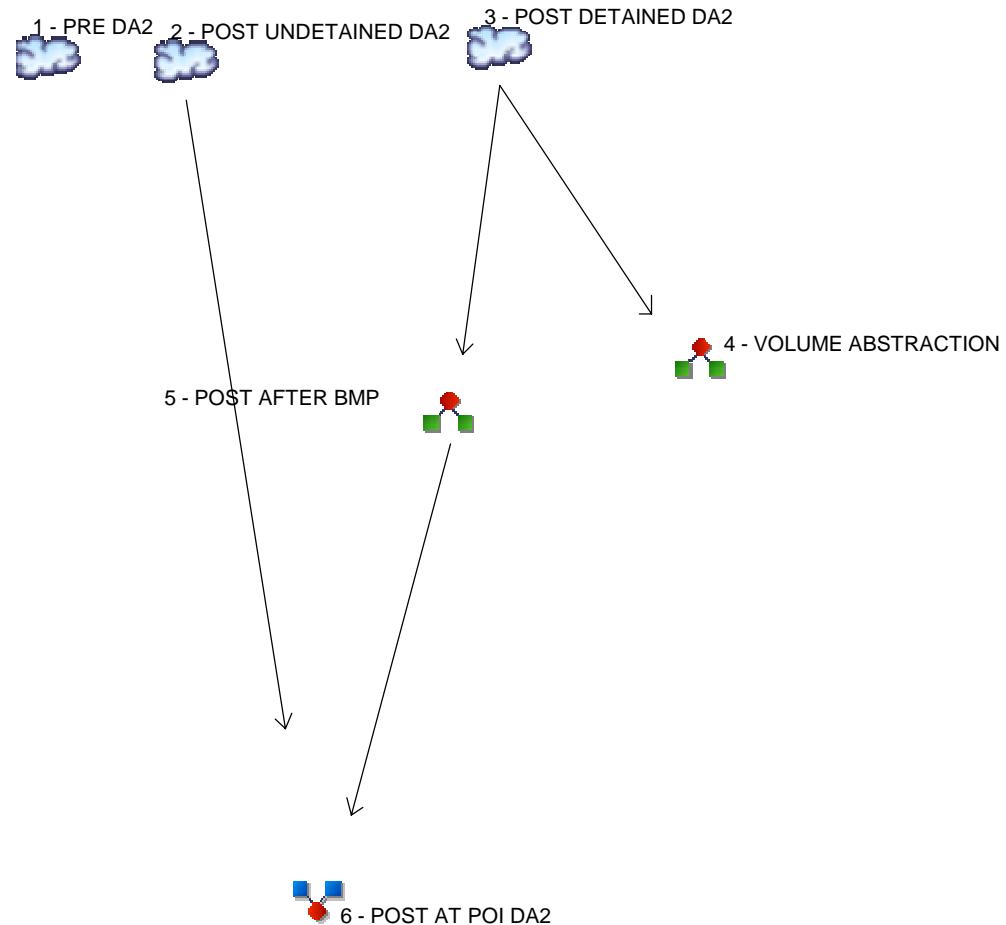

## Legend

### Hyd. Origin      Description

1	SCS Runoff	PRE DA2
2	SCS Runoff	POST UNDETAINED DA2
3	SCS Runoff	POST DETAINED DA2
4	Diversion1	VOLUME ABSTRACTION
5	Diversion2	POST AFTER BMP
6	Combine	POST AT POI DA2

# Hydrograph Return Period Recap

Hydraflow Hydrographs Extension for AutoCAD® Civil 3D® 2015 by Autodesk, Inc. v10.4

Hyd. No.	Hydrograph type (origin)	Inflow hyd(s)	Peak Outflow (cfs)								Hydrograph Description
			1-yr	2-yr	3-yr	5-yr	10-yr	25-yr	50-yr	100-yr	
1	SCS Runoff	----	----	----	----	----	----	----	0.547	-----	PRE DA2
2	SCS Runoff	----	----	----	----	----	----	----	0.392	-----	POST UNDETAINED DA2
3	SCS Runoff	----	----	----	----	----	----	----	0.153	-----	POST DETAINED DA2
4	Diversion1	3	----	----	----	----	----	----	0.153	-----	VOLUME ABSTRACTION
5	Diversion2	3	----	----	----	----	----	----	0.152	-----	POST AFTER BMP
6	Combine	2, 5	----	----	----	----	----	----	0.392	-----	POST AT POI DA2

# Hydrograph Summary Report

Hydraflow Hydrographs Extension for AutoCAD® Civil 3D® 2015 by Autodesk, Inc. v10.4

Hyd. No.	Hydrograph type (origin)	Peak flow (cfs)	Time interval (min)	Time to Peak (min)	Hyd. volume (cuft)	Inflow hyd(s)	Maximum elevation (ft)	Total strge used (cuft)	Hydrograph Description
1	SCS Runoff	0.547	2	720	1,252	-----	-----	-----	PRE DA2
2	SCS Runoff	0.392	2	718	897	-----	-----	-----	POST UNDETAINED DA2
3	SCS Runoff	0.153	2	724	480	-----	-----	-----	POST DETAINED DA2
4	Diversion1	0.153	2	724	142	3	-----	-----	VOLUME ABSTRACTION
5	Diversion2	0.152	2	726	338	3	-----	-----	POST AFTER BMP
6	Combine	0.392	2	718	1,235	2, 5	-----	-----	POST AT POI DA2

# Hydrograph Report

Hydraflow Hydrographs Extension for AutoCAD® Civil 3D® 2015 by Autodesk, Inc. v10.4


Sunday, 11 / 6 / 2016

## Hyd. No. 1

PRE DA2

Hydrograph type	= SCS Runoff	Peak discharge	= 0.547 cfs
Storm frequency	= 50 yrs	Time to peak	= 12.00 hrs
Time interval	= 2 min	Hyd. volume	= 1,252 cuft
Drainage area	= 0.150 ac	Curve number	= 71*
Basin Slope	= 0.0 %	Hydraulic length	= 0 ft
Tc method	= TR55	Time of conc. (Tc)	= 8.40 min
Total precip.	= 5.24 in	Distribution	= Type II
Storm duration	= 24 hrs	Shape factor	= 484

\* Composite (Area/CN) = [(0.090 x 71) + (0.060 x 70)] / 0.150

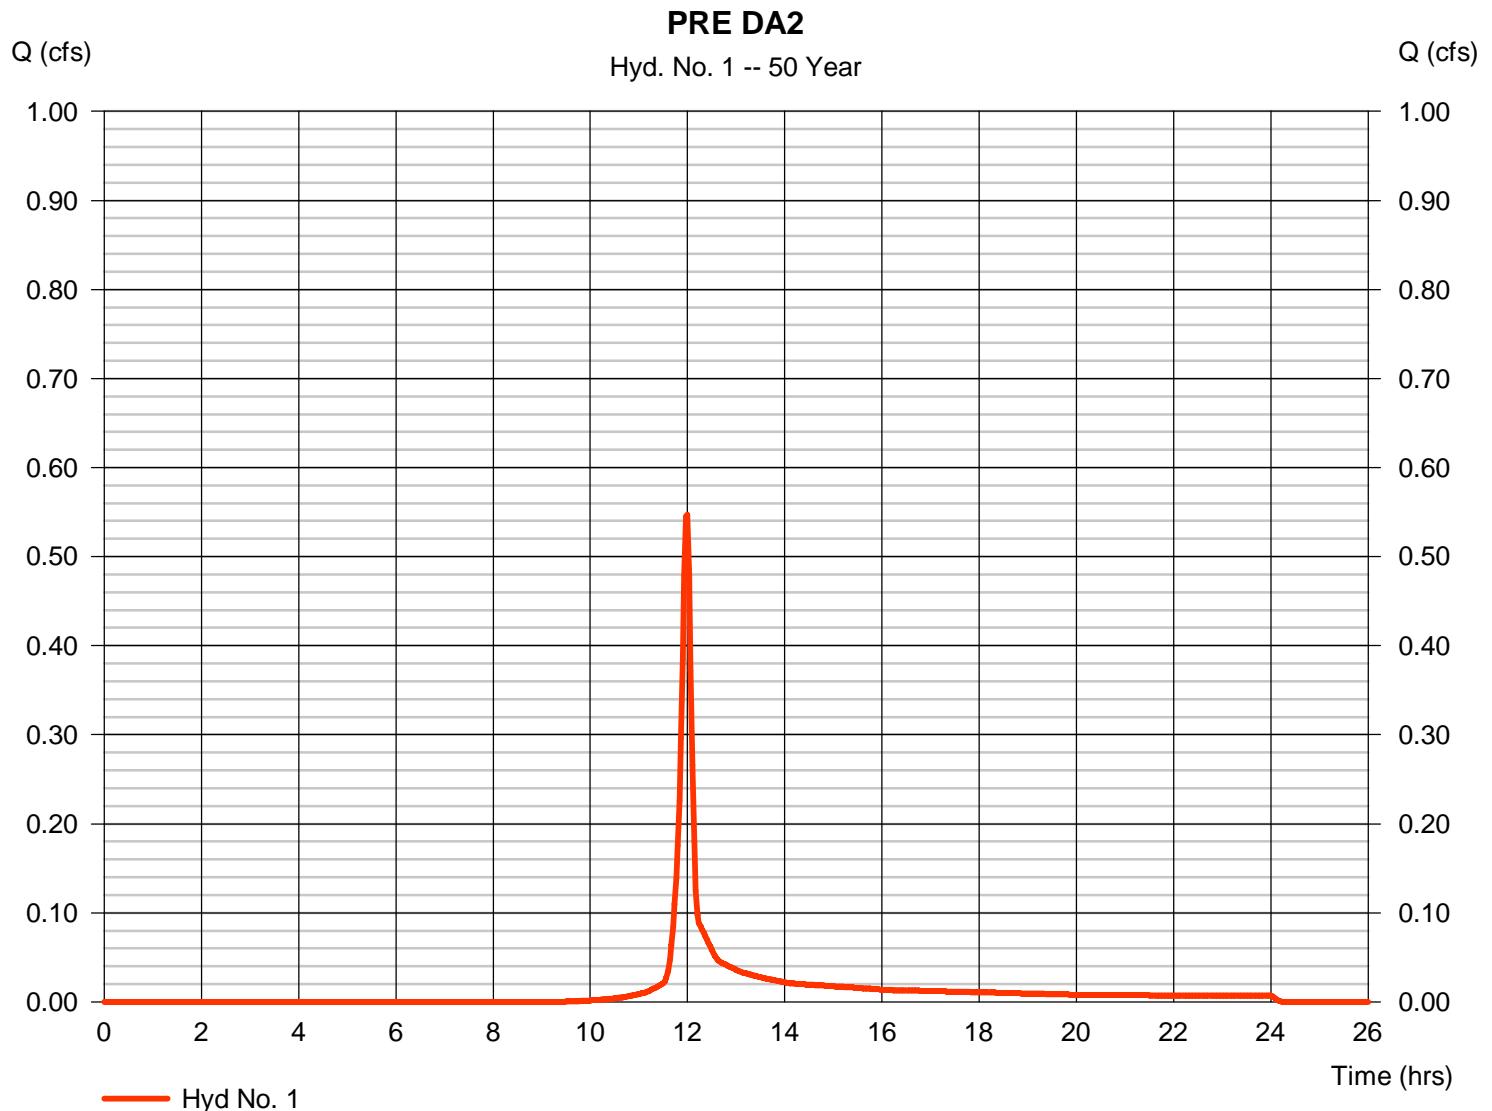

# TR55 Tc Worksheet

Hydraflow Hydrographs Extension for AutoCAD® Civil 3D® 2015 by Autodesk, Inc. v10.4

## Hyd. No. 1

PRE DA2

<u>Description</u>	<u>A</u>	<u>B</u>	<u>C</u>	<u>Totals</u>	
<b>Sheet Flow</b>					
Manning's n-value	= 0.240	0.011	0.011		
Flow length (ft)	= 50.0	0.0	0.0		
Two-year 24-hr precip. (in)	= 2.66	0.00	0.00		
Land slope (%)	= 2.50	0.00	0.00		
<b>Travel Time (min)</b>	<b>= 8.22</b>	<b>+ 0.00</b>	<b>+ 0.00</b>	<b>=</b>	<b>8.22</b>
<b>Shallow Concentrated Flow</b>					
Flow length (ft)	= 31.00	0.00	0.00		
Watercourse slope (%)	= 2.20	0.00	0.00		
Surface description	= Unpaved	Paved	Paved		
Average velocity (ft/s)	= 2.39	0.00	0.00		
<b>Travel Time (min)</b>	<b>= 0.22</b>	<b>+ 0.00</b>	<b>+ 0.00</b>	<b>=</b>	<b>0.22</b>
<b>Channel Flow</b>					
X sectional flow area (sqft)	= 0.00	0.00	0.00		
Wetted perimeter (ft)	= 0.00	0.00	0.00		
Channel slope (%)	= 0.00	0.00	0.00		
Manning's n-value	= 0.035	0.015	0.015		
Velocity (ft/s)	= 0.00	0.00	0.00		
Flow length (ft)	({0}) 0.0	0.0	0.0		
<b>Travel Time (min)</b>	<b>= 0.00</b>	<b>+ 0.00</b>	<b>+ 0.00</b>	<b>=</b>	<b>0.00</b>
<b>Total Travel Time, Tc .....</b>					<b>8.40 min</b>

# Hydrograph Report

Hydraflow Hydrographs Extension for AutoCAD® Civil 3D® 2015 by Autodesk, Inc. v10.4

Sunday, 11 / 6 / 2016

## Hyd. No. 2


### POST UNDETAINED DA2

Hydrograph type	= SCS Runoff	Peak discharge	= 0.392 cfs
Storm frequency	= 50 yrs	Time to peak	= 11.97 hrs
Time interval	= 2 min	Hyd. volume	= 897 cuft
Drainage area	= 0.100 ac	Curve number	= 73*
Basin Slope	= 0.0 %	Hydraulic length	= 0 ft
Tc method	= TR55	Time of conc. (Tc)	= 8.40 min
Total precip.	= 5.24 in	Distribution	= Type II
Storm duration	= 24 hrs	Shape factor	= 484

\* Composite (Area/CN) = [(0.010 x 89) + (0.070 x 71) + (0.020 x 70)] / 0.100

### POST UNDETAINED DA2

Hyd. No. 2 -- 50 Year

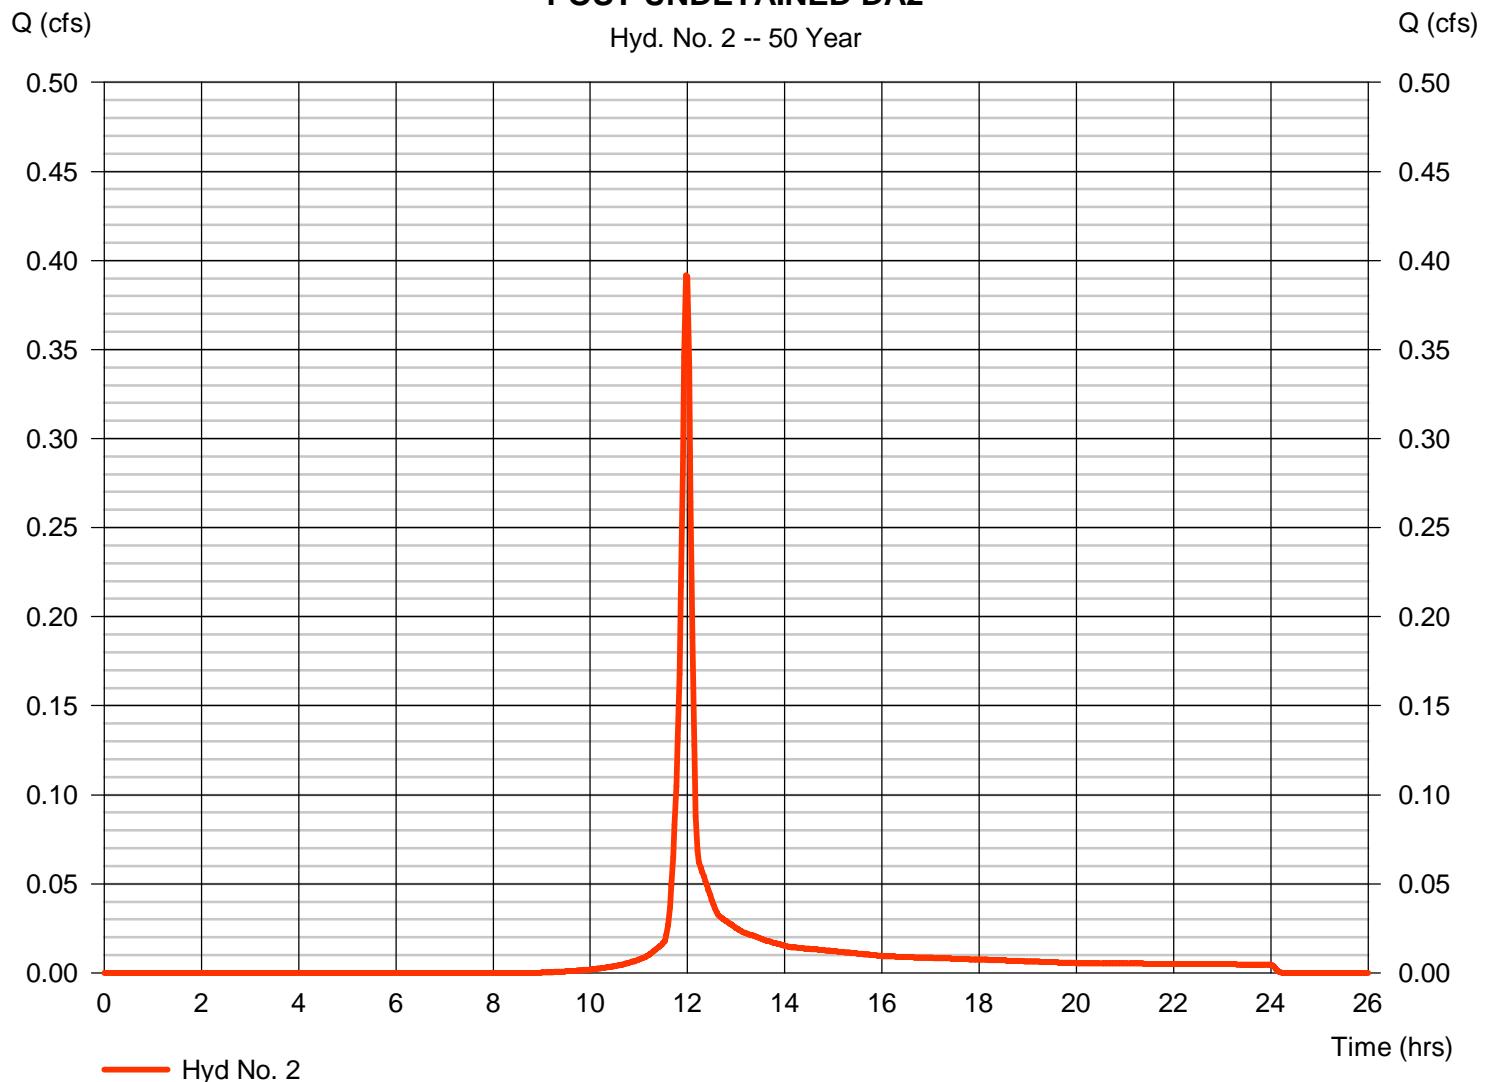

# TR55 Tc Worksheet

Hydraflow Hydrographs Extension for AutoCAD® Civil 3D® 2015 by Autodesk, Inc. v10.4

## Hyd. No. 2

POST UNDETAINED DA2

<u>Description</u>	<u>A</u>	<u>B</u>	<u>C</u>	<u>Totals</u>	
<b>Sheet Flow</b>					
Manning's n-value	= 0.240	0.011	0.011		
Flow length (ft)	= 50.0	0.0	0.0		
Two-year 24-hr precip. (in)	= 2.66	0.00	0.00		
Land slope (%)	= 2.50	0.00	0.00		
<b>Travel Time (min)</b>	<b>= 8.22</b>	<b>+ 0.00</b>	<b>+ 0.00</b>	<b>=</b>	<b>8.22</b>
<b>Shallow Concentrated Flow</b>					
Flow length (ft)	= 31.00	0.00	0.00		
Watercourse slope (%)	= 2.20	0.00	0.00		
Surface description	= Unpaved	Paved	Paved		
Average velocity (ft/s)	= 2.39	0.00	0.00		
<b>Travel Time (min)</b>	<b>= 0.22</b>	<b>+ 0.00</b>	<b>+ 0.00</b>	<b>=</b>	<b>0.22</b>
<b>Channel Flow</b>					
X sectional flow area (sqft)	= 0.00	0.00	0.00		
Wetted perimeter (ft)	= 0.00	0.00	0.00		
Channel slope (%)	= 0.00	0.00	0.00		
Manning's n-value	= 0.035	0.015	0.015		
Velocity (ft/s)	= 0.00	0.00	0.00		
Flow length (ft)	({0}) 0.0	0.0	0.0		
<b>Travel Time (min)</b>	<b>= 0.00</b>	<b>+ 0.00</b>	<b>+ 0.00</b>	<b>=</b>	<b>0.00</b>
<b>Total Travel Time, Tc .....</b>					<b>8.40 min</b>

# Hydrograph Report

Hydraflow Hydrographs Extension for AutoCAD® Civil 3D® 2015 by Autodesk, Inc. v10.4

Sunday, 11 / 6 / 2016

## Hyd. No. 3


### POST DETAINED DA2

Hydrograph type	= SCS Runoff	Peak discharge	= 0.153 cfs
Storm frequency	= 50 yrs	Time to peak	= 12.07 hrs
Time interval	= 2 min	Hyd. volume	= 480 cuft
Drainage area	= 0.050 ac	Curve number	= 75*
Basin Slope	= 0.0 %	Hydraulic length	= 0 ft
Tc method	= User	Time of conc. (Tc)	= 17.40 min
Total precip.	= 5.24 in	Distribution	= Type II
Storm duration	= 24 hrs	Shape factor	= 484

\* Composite (Area/CN) = [(0.010 x 89) + (0.040 x 71)] / 0.050

### POST DETAINED DA2

Hyd. No. 3 -- 50 Year

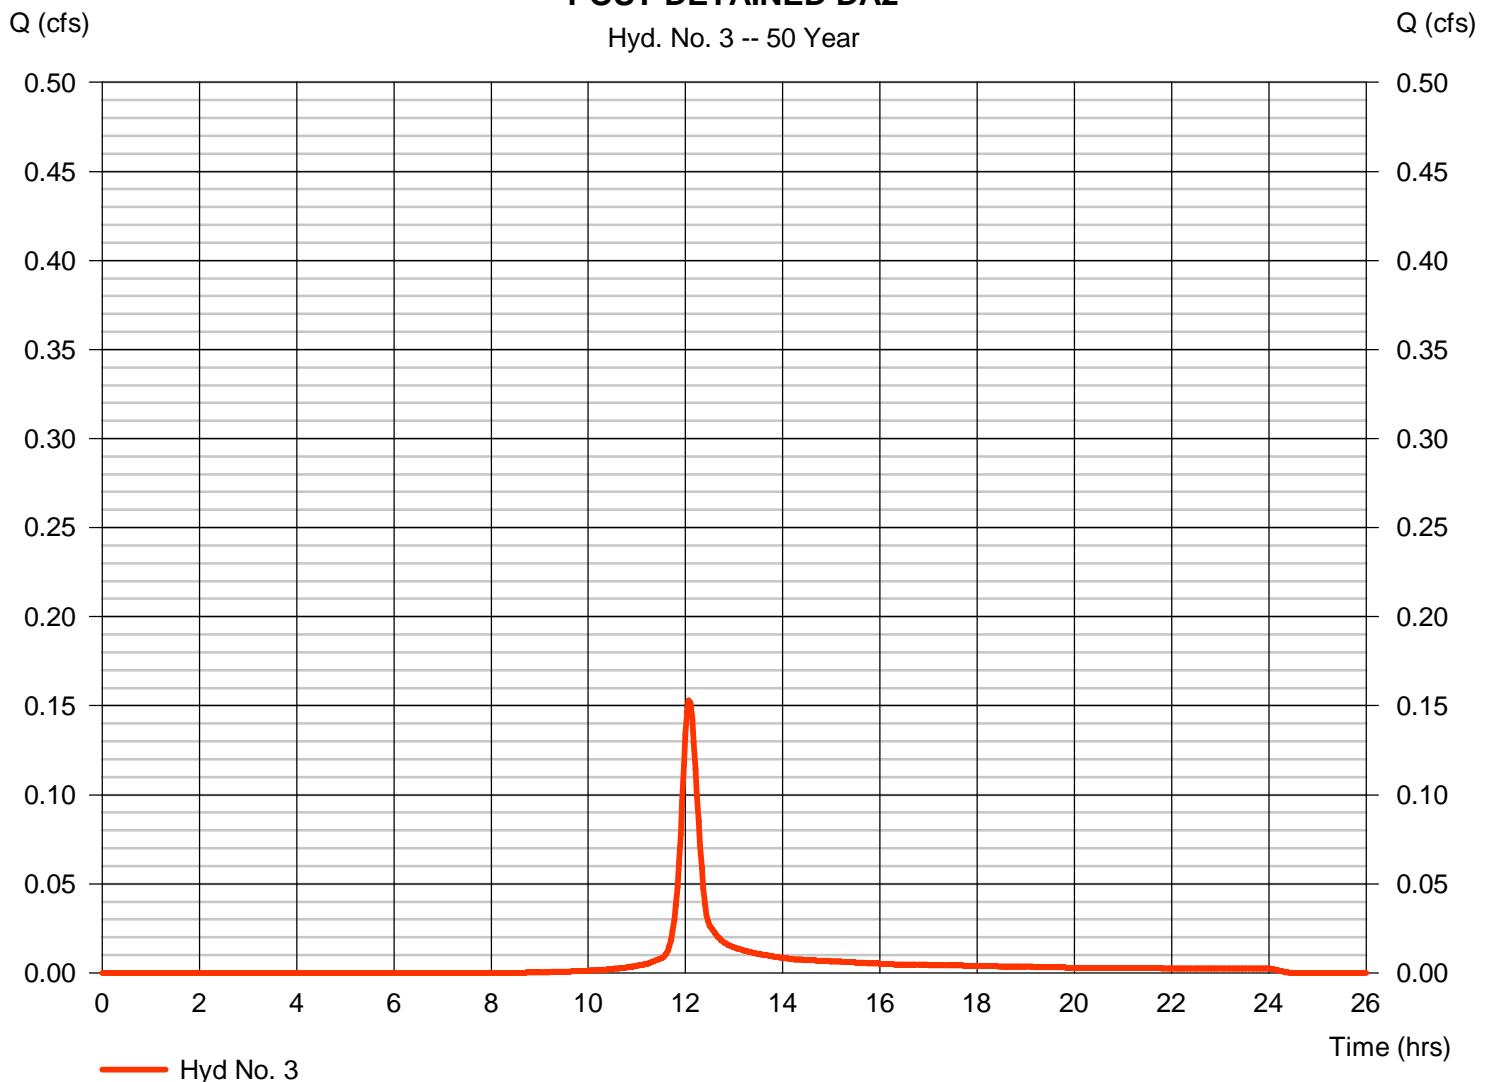

# Hydrograph Report


Hydraflow Hydrographs Extension for AutoCAD® Civil 3D® 2015 by Autodesk, Inc. v10.4

Sunday, 11 / 6 / 2016

## Hyd. No. 4

### VOLUME ABSTRACTION

Hydrograph type	= Diversion1	Peak discharge	= 0.153 cfs
Storm frequency	= 50 yrs	Time to peak	= 12.07 hrs
Time interval	= 2 min	Hyd. volume	= 142 cuft
Inflow hydrograph	= 3 - POST DETAINED DA2	2nd diverted hyd.	= 5
Diversion method	= First Flush Volume	Volume Up To	= 130.00 cuft

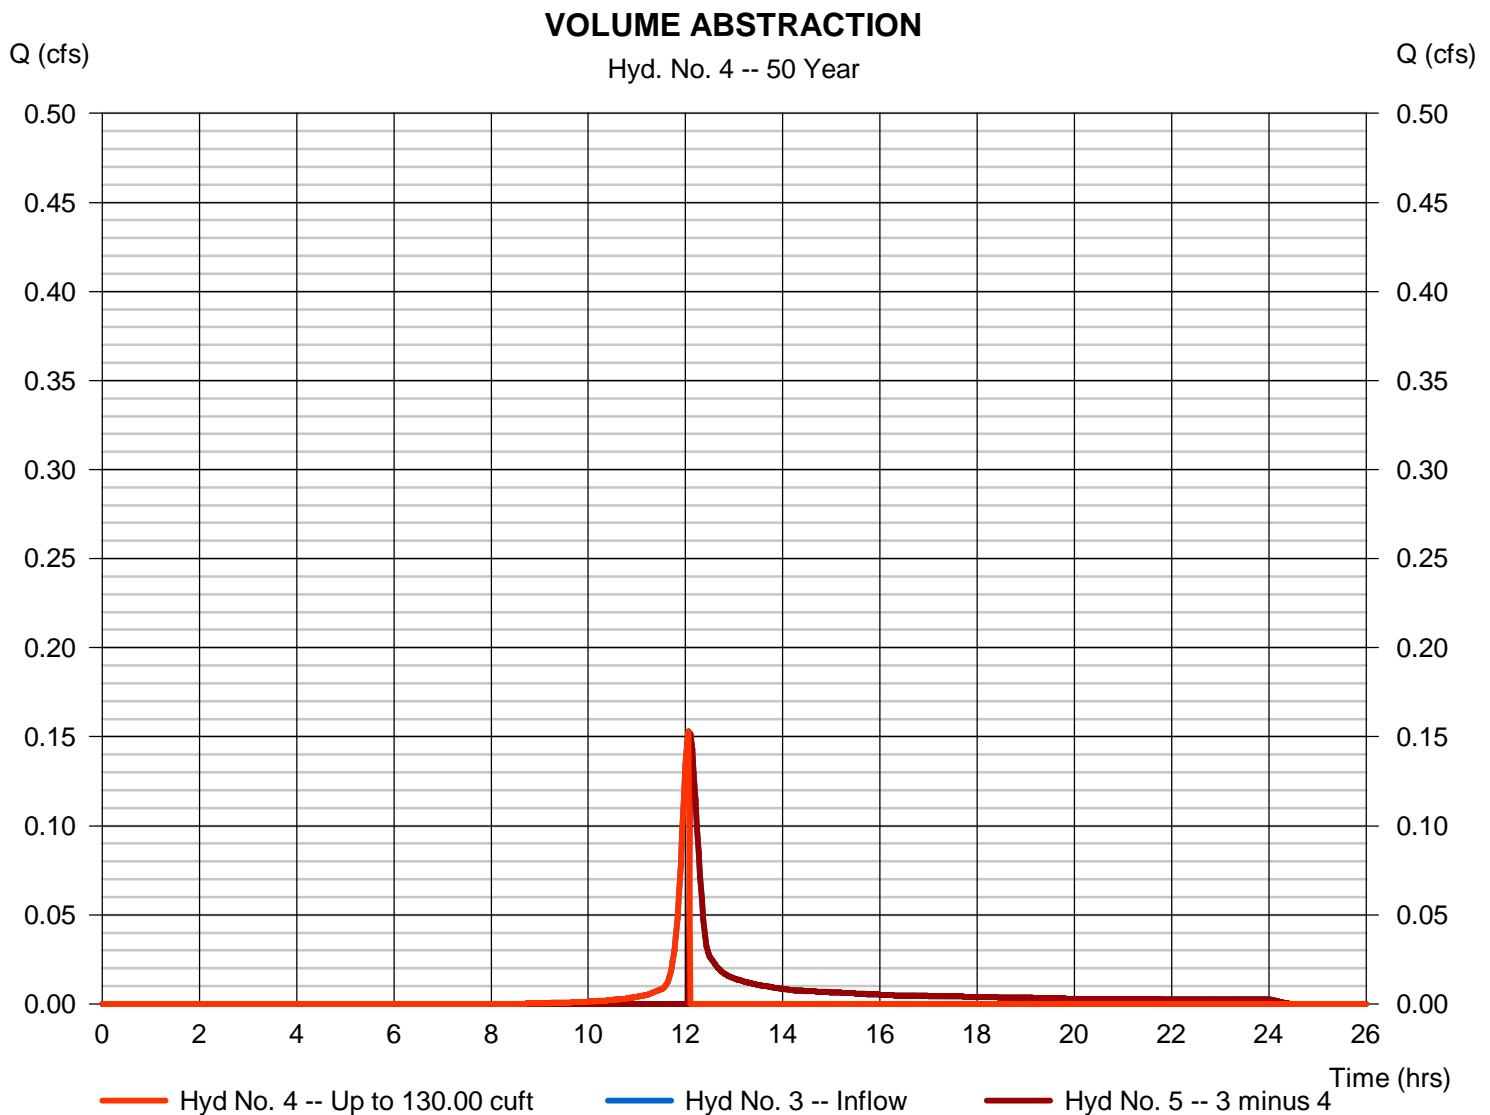

# Hydrograph Report


Hydraflow Hydrographs Extension for AutoCAD® Civil 3D® 2015 by Autodesk, Inc. v10.4

Sunday, 11 / 6 / 2016

## Hyd. No. 5

### POST AFTER BMP

Hydrograph type	= Diversion2	Peak discharge	= 0.152 cfs
Storm frequency	= 50 yrs	Time to peak	= 12.10 hrs
Time interval	= 2 min	Hyd. volume	= 338 cuft
Inflow hydrograph	= 3 - POST DETAINED DA2	2nd diverted hyd.	= 4
Diversion method	= First Flush Volume	Volume Up To	= 130.00 cuft

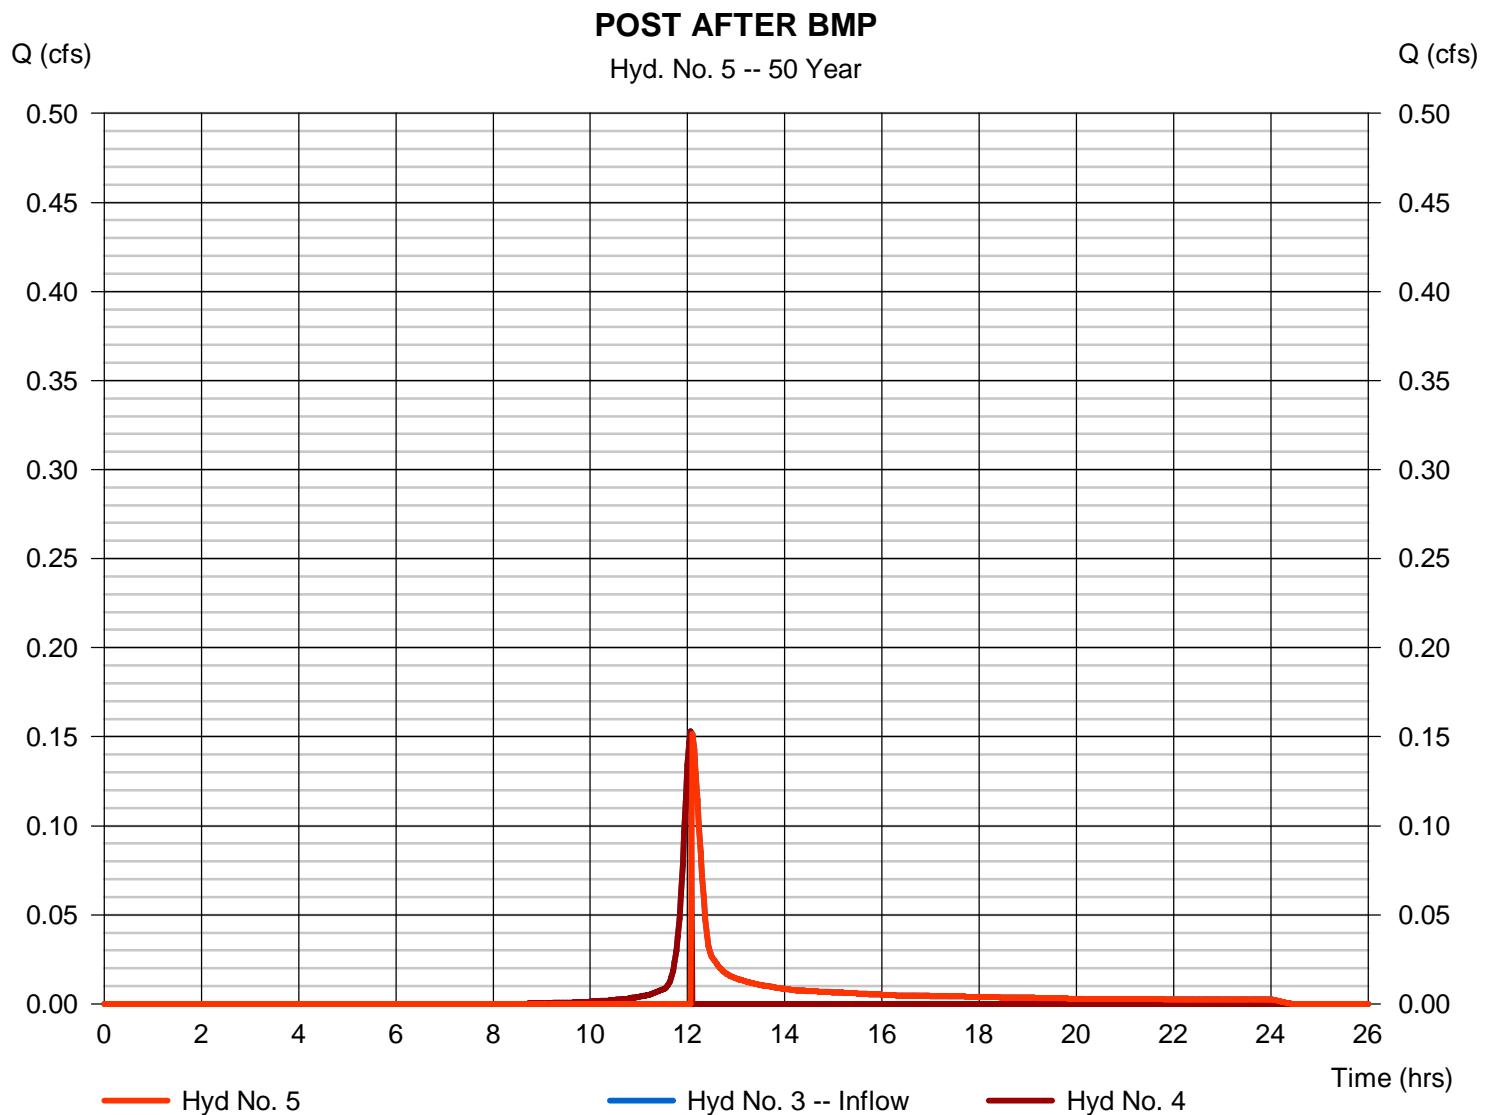

# Hydrograph Report


Hydraflow Hydrographs Extension for AutoCAD® Civil 3D® 2015 by Autodesk, Inc. v10.4

Sunday, 11 / 6 / 2016

## Hyd. No. 6

### POST AT POI DA2

Hydrograph type	= Combine	Peak discharge	= 0.392 cfs
Storm frequency	= 50 yrs	Time to peak	= 11.97 hrs
Time interval	= 2 min	Hyd. volume	= 1,235 cuft
Inflow hyds.	= 2, 5	Contrib. drain. area	= 0.100 ac

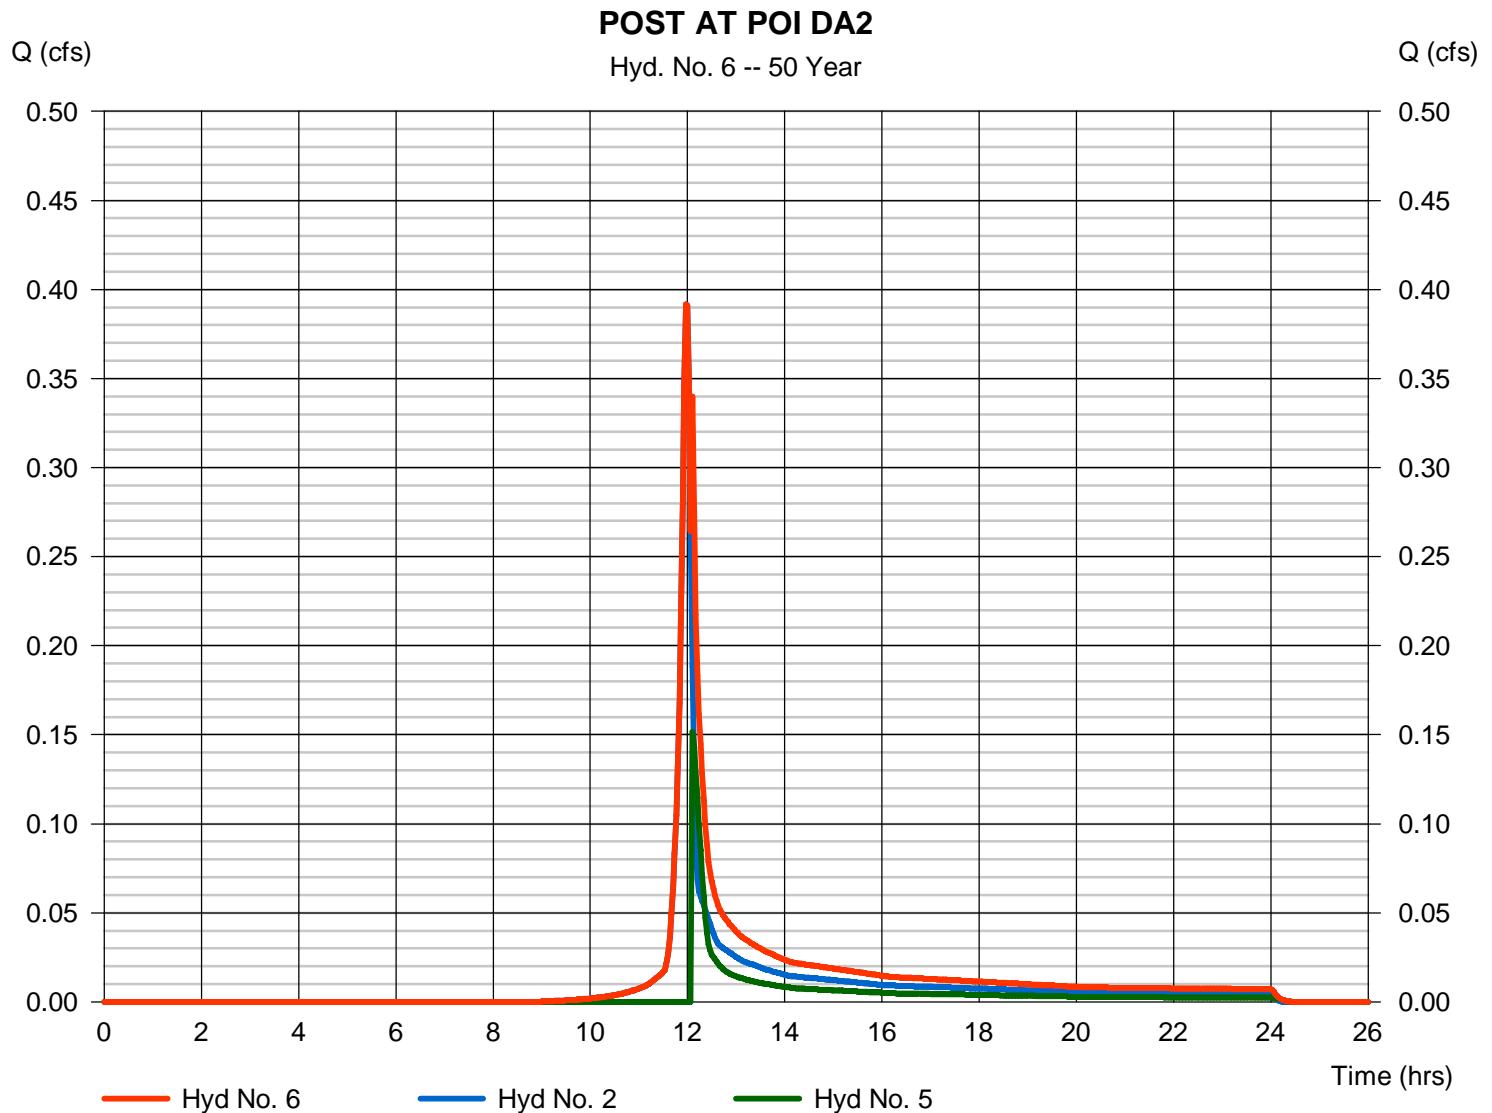

# Hydraflow Rainfall Report

Return Period (Yrs)	Intensity-Duration-Frequency Equation Coefficients (FHA)			
	B	D	E	(N/A)
1	39.9938	10.0000	0.8826	-----
2	46.8600	10.1000	0.8723	-----
3	0.0000	0.0000	0.0000	-----
5	47.4204	9.3000	0.8196	-----
10	26589.4199	47.3998	2.1160	-----
25	53942.1797	51.5998	2.2139	-----
50	69308.7266	52.6998	2.2395	-----
100	106327.6016	55.1997	2.2977	-----

File name: Charger IDF.IDF

$$\text{Intensity} = B / (T_c + D)^E$$


Return Period (Yrs)	Intensity Values (in/hr)											
	5 min	10	15	20	25	30	35	40	45	50	55	60
1	3.66	2.84	2.33	1.99	1.73	1.54	1.39	1.27	1.16	1.08	1.00	0.94
2	4.39	3.42	2.82	2.40	2.10	1.87	1.69	1.54	1.42	1.32	1.23	1.15
3	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
5	5.36	4.19	3.47	2.98	2.62	2.34	2.12	1.94	1.80	1.67	1.56	1.47
10	6.12	5.04	4.23	3.59	3.09	2.68	2.35	2.07	1.84	1.65	1.48	1.34
25	7.10	5.89	4.95	4.22	3.63	3.16	2.77	2.45	2.17	1.94	1.75	1.58
50	7.88	6.54	5.51	4.70	4.05	3.52	3.09	2.73	2.42	2.17	1.95	1.76
100	8.66	7.21	6.09	5.20	4.48	3.90	3.42	3.02	2.69	2.40	2.16	1.95

Tc = time in minutes. Values may exceed 60.

ESCGP-2\PPP\02 SCRO\07 PCSM\Attach 4 Stormwater Calcs\Charger\Hydraflow Rev 1\Charger Precip.pc

# Watershed Model Schematic

Hydraflow Hydrographs Extension for AutoCAD® Civil 3D® 2015 by Autodesk, Inc. v10.4

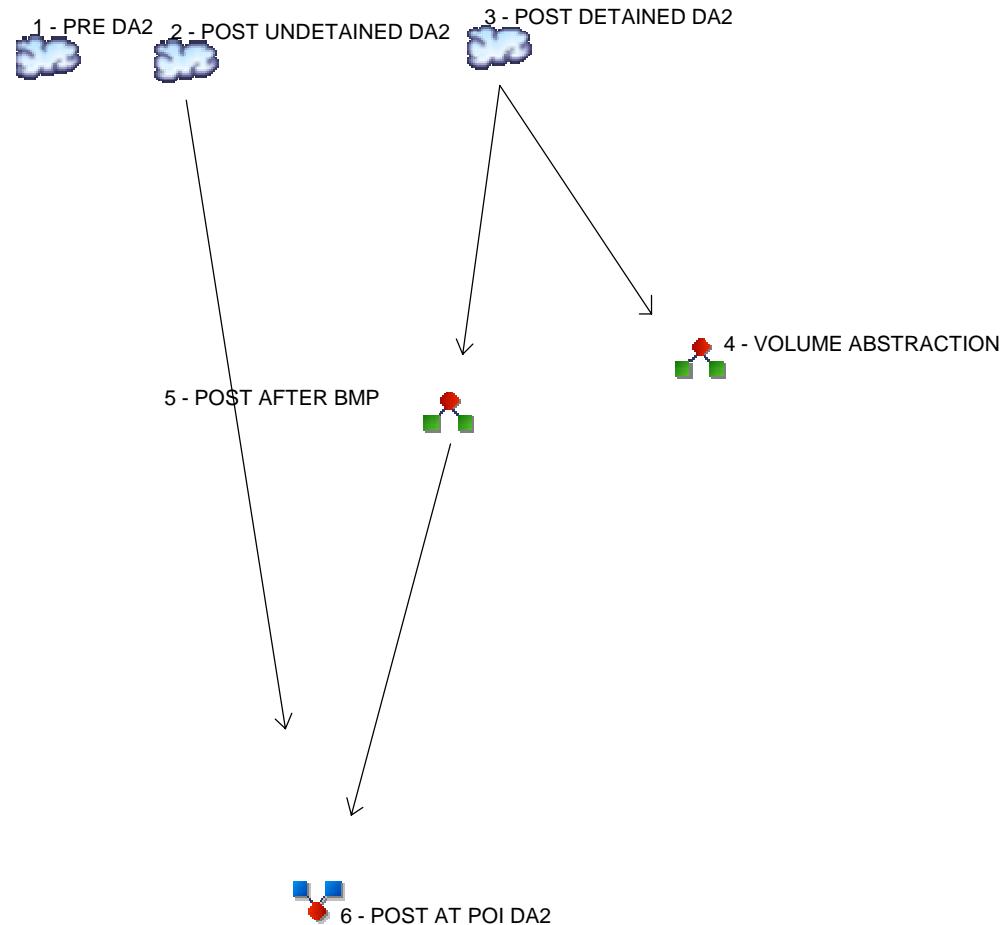

## Legend

### Hyd. Origin      Description

1	SCS Runoff	PRE DA2
2	SCS Runoff	POST UNDETAINED DA2
3	SCS Runoff	POST DETAINED DA2
4	Diversion1	VOLUME ABSTRACTION
5	Diversion2	POST AFTER BMP
6	Combine	POST AT POI DA2

# Hydrograph Return Period Recap

Hydraflow Hydrographs Extension for AutoCAD® Civil 3D® 2015 by Autodesk, Inc. v10.4

Hyd. No.	Hydrograph type (origin)	Inflow hyd(s)	Peak Outflow (cfs)								Hydrograph Description
			1-yr	2-yr	3-yr	5-yr	10-yr	25-yr	50-yr	100-yr	
1	SCS Runoff	----	----	----	----	----	----	----	----	0.672	PRE DA2
2	SCS Runoff	----	----	----	----	----	----	----	----	0.478	POST UNDETAINED DA2
3	SCS Runoff	----	----	----	----	----	----	----	----	0.202	POST DETAINED DA2
4	Diversion1	3	----	----	----	----	----	----	----	0.173	VOLUME ABSTRACTION
5	Diversion2	3	----	----	----	----	----	----	----	0.202	POST AFTER BMP
6	Combine	2, 5	----	----	----	----	----	----	----	0.668	POST AT POI DA2

# Hydrograph Summary Report

Hydraflow Hydrographs Extension for AutoCAD® Civil 3D® 2015 by Autodesk, Inc. v10.4

Hyd. No.	Hydrograph type (origin)	Peak flow (cfs)	Time interval (min)	Time to Peak (min)	Hyd. volume (cuft)	Inflow hyd(s)	Maximum elevation (ft)	Total strge used (cuft)	Hydrograph Description
1	SCS Runoff	0.672	2	718	1,539	-----	-----	-----	PRE DA2
2	SCS Runoff	0.478	2	718	1,094	-----	-----	-----	POST UNDETAINED DA2
3	SCS Runoff	0.202	2	722	567	-----	-----	-----	POST DETAINED DA2
4	Diversion1	0.173	2	718	136	3	-----	-----	VOLUME ABSTRACTION
5	Diversion2	0.202	2	722	431	3	-----	-----	POST AFTER BMP
6	Combine	0.668	2	720	1,525	2, 5	-----	-----	POST AT POI DA2

# Hydrograph Report

Hydraflow Hydrographs Extension for AutoCAD® Civil 3D® 2015 by Autodesk, Inc. v10.4


Sunday, 11 / 6 / 2016

## Hyd. No. 1

PRE DA2

Hydrograph type	= SCS Runoff	Peak discharge	= 0.672 cfs
Storm frequency	= 100 yrs	Time to peak	= 718 min
Time interval	= 2 min	Hyd. volume	= 1,539 cuft
Drainage area	= 0.150 ac	Curve number	= 71*
Basin Slope	= 0.0 %	Hydraulic length	= 0 ft
Tc method	= TR55	Time of conc. (Tc)	= 8.40 min
Total precip.	= 5.91 in	Distribution	= Type II
Storm duration	= 24 hrs	Shape factor	= 484

\* Composite (Area/CN) = [(0.090 x 71) + (0.060 x 70)] / 0.150

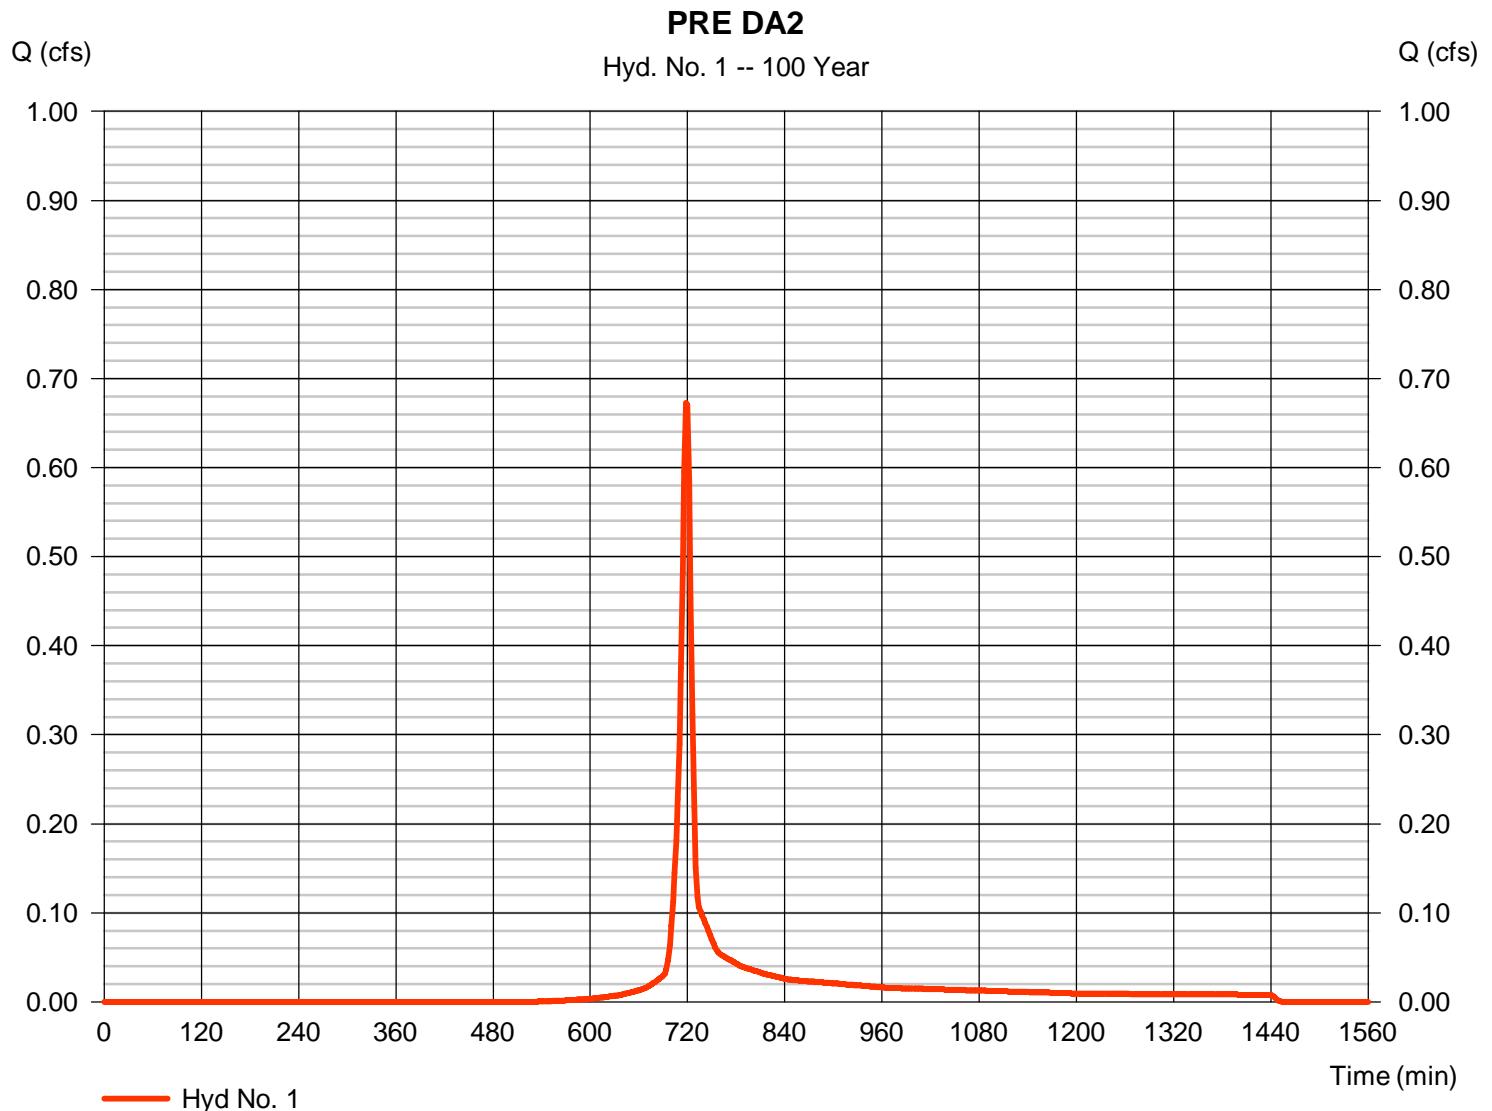

# TR55 Tc Worksheet

Hydraflow Hydrographs Extension for AutoCAD® Civil 3D® 2015 by Autodesk, Inc. v10.4

## Hyd. No. 1

PRE DA2

<u>Description</u>	<u>A</u>	<u>B</u>	<u>C</u>	<u>Totals</u>	
<b>Sheet Flow</b>					
Manning's n-value	= 0.240	0.011	0.011		
Flow length (ft)	= 50.0	0.0	0.0		
Two-year 24-hr precip. (in)	= 2.66	0.00	0.00		
Land slope (%)	= 2.50	0.00	0.00		
<b>Travel Time (min)</b>	<b>= 8.22</b>	<b>+ 0.00</b>	<b>+ 0.00</b>	<b>=</b>	<b>8.22</b>
<b>Shallow Concentrated Flow</b>					
Flow length (ft)	= 31.00	0.00	0.00		
Watercourse slope (%)	= 2.20	0.00	0.00		
Surface description	= Unpaved	Paved	Paved		
Average velocity (ft/s)	= 2.39	0.00	0.00		
<b>Travel Time (min)</b>	<b>= 0.22</b>	<b>+ 0.00</b>	<b>+ 0.00</b>	<b>=</b>	<b>0.22</b>
<b>Channel Flow</b>					
X sectional flow area (sqft)	= 0.00	0.00	0.00		
Wetted perimeter (ft)	= 0.00	0.00	0.00		
Channel slope (%)	= 0.00	0.00	0.00		
Manning's n-value	= 0.035	0.015	0.015		
Velocity (ft/s)	= 0.00	0.00	0.00		
Flow length (ft)	({0}) 0.0	0.0	0.0		
<b>Travel Time (min)</b>	<b>= 0.00</b>	<b>+ 0.00</b>	<b>+ 0.00</b>	<b>=</b>	<b>0.00</b>
<b>Total Travel Time, Tc .....</b>					<b>8.40 min</b>

# Hydrograph Report

Hydraflow Hydrographs Extension for AutoCAD® Civil 3D® 2015 by Autodesk, Inc. v10.4


Sunday, 11 / 6 / 2016

## Hyd. No. 2

### POST UNDETAINED DA2

Hydrograph type	= SCS Runoff	Peak discharge	= 0.478 cfs
Storm frequency	= 100 yrs	Time to peak	= 718 min
Time interval	= 2 min	Hyd. volume	= 1,094 cuft
Drainage area	= 0.100 ac	Curve number	= 73*
Basin Slope	= 0.0 %	Hydraulic length	= 0 ft
Tc method	= TR55	Time of conc. (Tc)	= 8.40 min
Total precip.	= 5.91 in	Distribution	= Type II
Storm duration	= 24 hrs	Shape factor	= 484

\* Composite (Area/CN) = [(0.010 x 89) + (0.070 x 71) + (0.020 x 70)] / 0.100

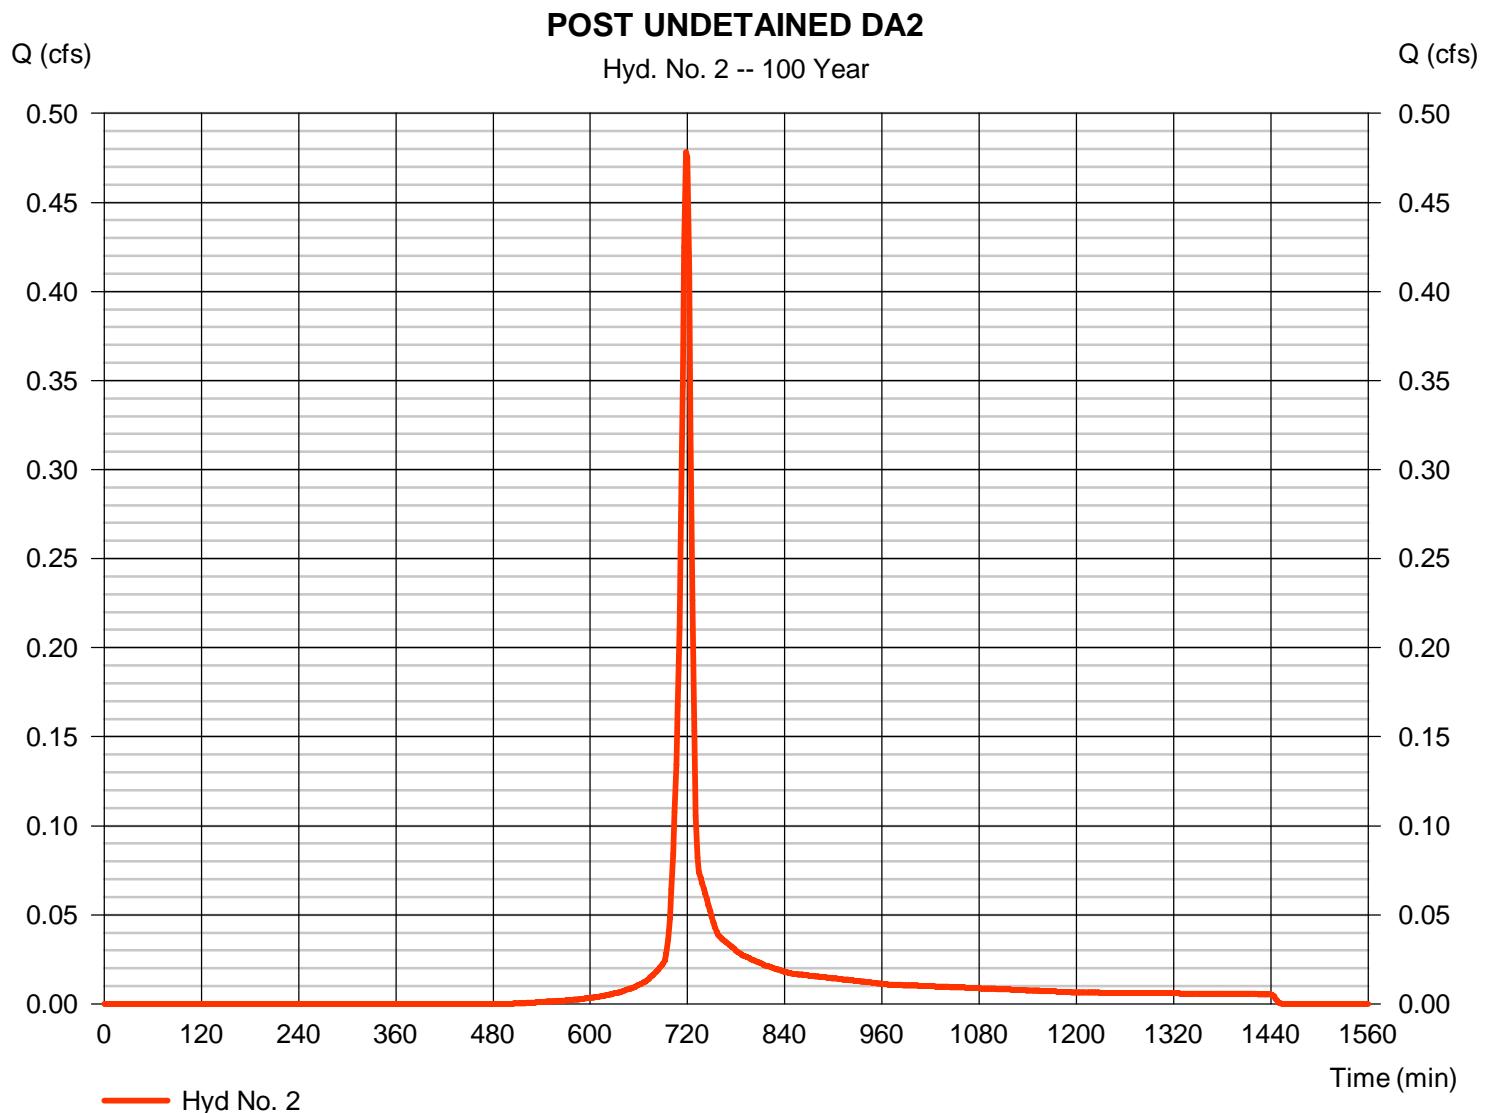

# TR55 Tc Worksheet

Hydraflow Hydrographs Extension for AutoCAD® Civil 3D® 2015 by Autodesk, Inc. v10.4

## Hyd. No. 2

POST UNDETAINED DA2

<u>Description</u>	<u>A</u>	<u>B</u>	<u>C</u>	<u>Totals</u>	
<b>Sheet Flow</b>					
Manning's n-value	= 0.240	0.011	0.011		
Flow length (ft)	= 50.0	0.0	0.0		
Two-year 24-hr precip. (in)	= 2.66	0.00	0.00		
Land slope (%)	= 2.50	0.00	0.00		
<b>Travel Time (min)</b>	<b>= 8.22</b>	<b>+ 0.00</b>	<b>+ 0.00</b>	<b>=</b>	<b>8.22</b>
<b>Shallow Concentrated Flow</b>					
Flow length (ft)	= 31.00	0.00	0.00		
Watercourse slope (%)	= 2.20	0.00	0.00		
Surface description	= Unpaved	Paved	Paved		
Average velocity (ft/s)	= 2.39	0.00	0.00		
<b>Travel Time (min)</b>	<b>= 0.22</b>	<b>+ 0.00</b>	<b>+ 0.00</b>	<b>=</b>	<b>0.22</b>
<b>Channel Flow</b>					
X sectional flow area (sqft)	= 0.00	0.00	0.00		
Wetted perimeter (ft)	= 0.00	0.00	0.00		
Channel slope (%)	= 0.00	0.00	0.00		
Manning's n-value	= 0.035	0.015	0.015		
Velocity (ft/s)	= 0.00	0.00	0.00		
Flow length (ft)	({0}) 0.0	0.0	0.0		
<b>Travel Time (min)</b>	<b>= 0.00</b>	<b>+ 0.00</b>	<b>+ 0.00</b>	<b>=</b>	<b>0.00</b>
<b>Total Travel Time, Tc .....</b>					<b>8.40 min</b>

# Hydrograph Report

Hydraflow Hydrographs Extension for AutoCAD® Civil 3D® 2015 by Autodesk, Inc. v10.4


Sunday, 11 / 6 / 2016

## Hyd. No. 3

### POST DETAINED DA2

Hydrograph type	= SCS Runoff	Peak discharge	= 0.202 cfs
Storm frequency	= 100 yrs	Time to peak	= 722 min
Time interval	= 2 min	Hyd. volume	= 567 cuft
Drainage area	= 0.050 ac	Curve number	= 75*
Basin Slope	= 0.0 %	Hydraulic length	= 0 ft
Tc method	= User	Time of conc. (Tc)	= 15.60 min
Total precip.	= 5.91 in	Distribution	= Type II
Storm duration	= 24 hrs	Shape factor	= 484

\* Composite (Area/CN) = [(0.010 x 89) + (0.040 x 71)] / 0.050

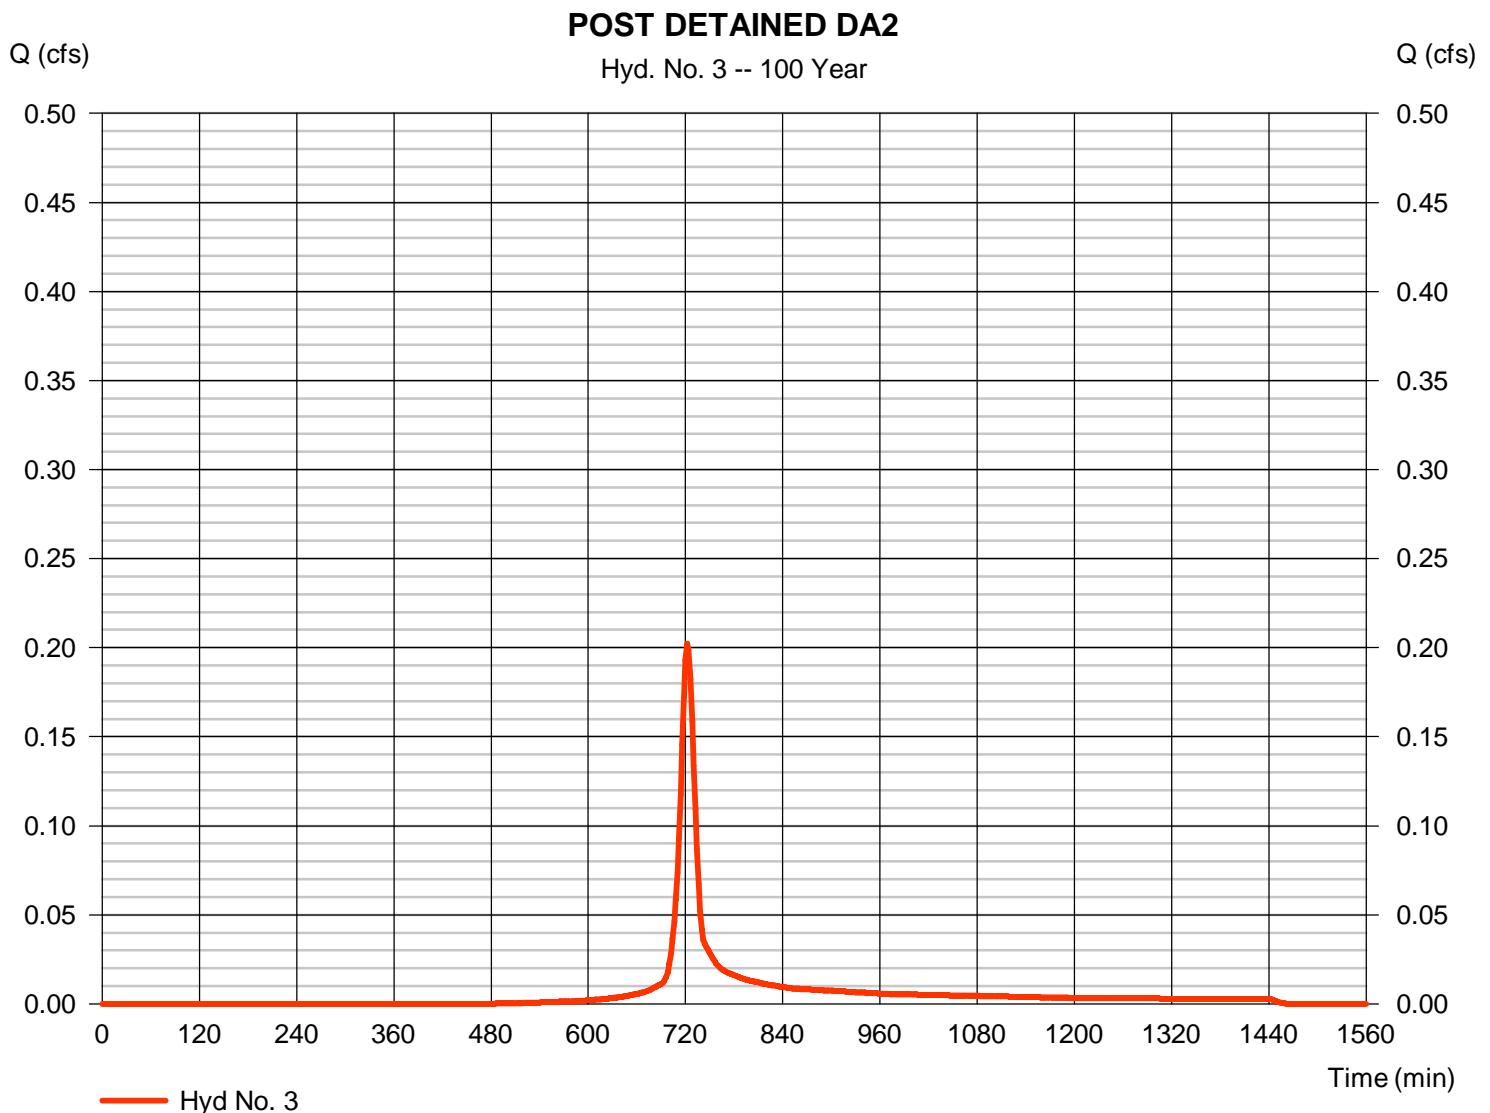

# Hydrograph Report


Hydraflow Hydrographs Extension for AutoCAD® Civil 3D® 2015 by Autodesk, Inc. v10.4

Sunday, 11 / 6 / 2016

## Hyd. No. 4

### VOLUME ABSTRACTION

Hydrograph type	= Diversion1	Peak discharge	= 0.173 cfs
Storm frequency	= 100 yrs	Time to peak	= 718 min
Time interval	= 2 min	Hyd. volume	= 136 cuft
Inflow hydrograph	= 3 - POST DETAINED DA2	2nd diverted hyd.	= 5
Diversion method	= First Flush Volume	Volume Up To	= 130.00 cuft

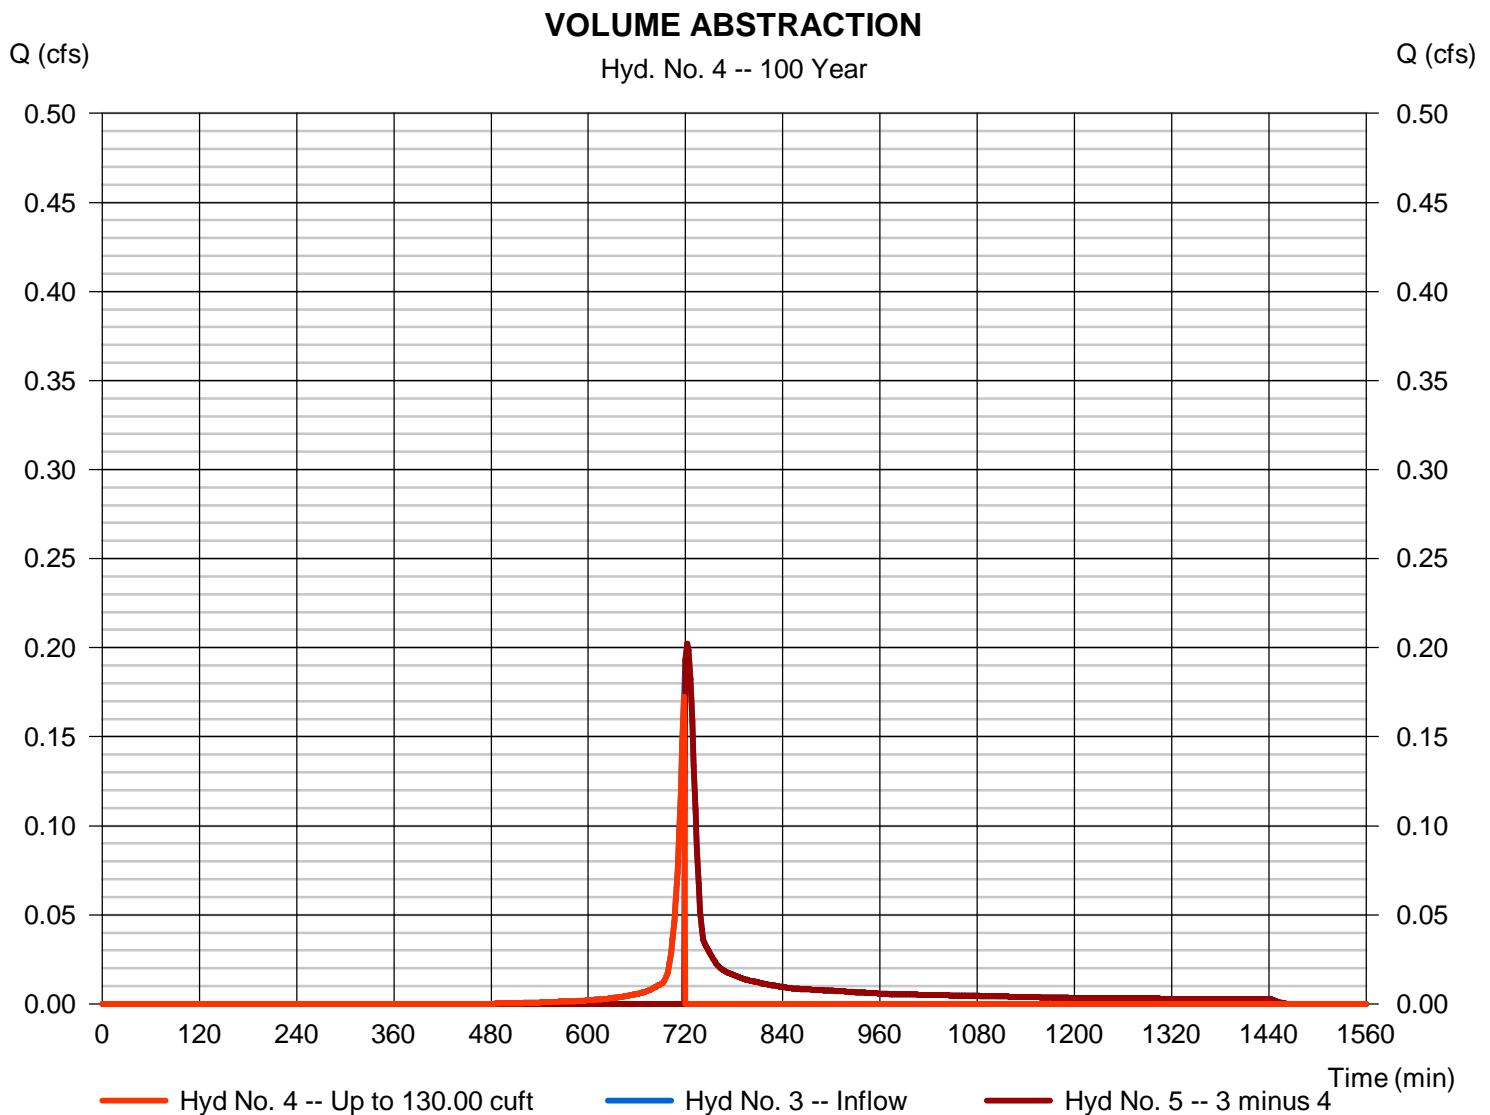

# Hydrograph Report


Hydraflow Hydrographs Extension for AutoCAD® Civil 3D® 2015 by Autodesk, Inc. v10.4

Sunday, 11 / 6 / 2016

## Hyd. No. 5

### POST AFTER BMP

Hydrograph type	= Diversion2	Peak discharge	= 0.202 cfs
Storm frequency	= 100 yrs	Time to peak	= 722 min
Time interval	= 2 min	Hyd. volume	= 431 cuft
Inflow hydrograph	= 3 - POST DETAINED DA2	2nd diverted hyd.	= 4
Diversion method	= First Flush Volume	Volume Up To	= 130.00 cuft

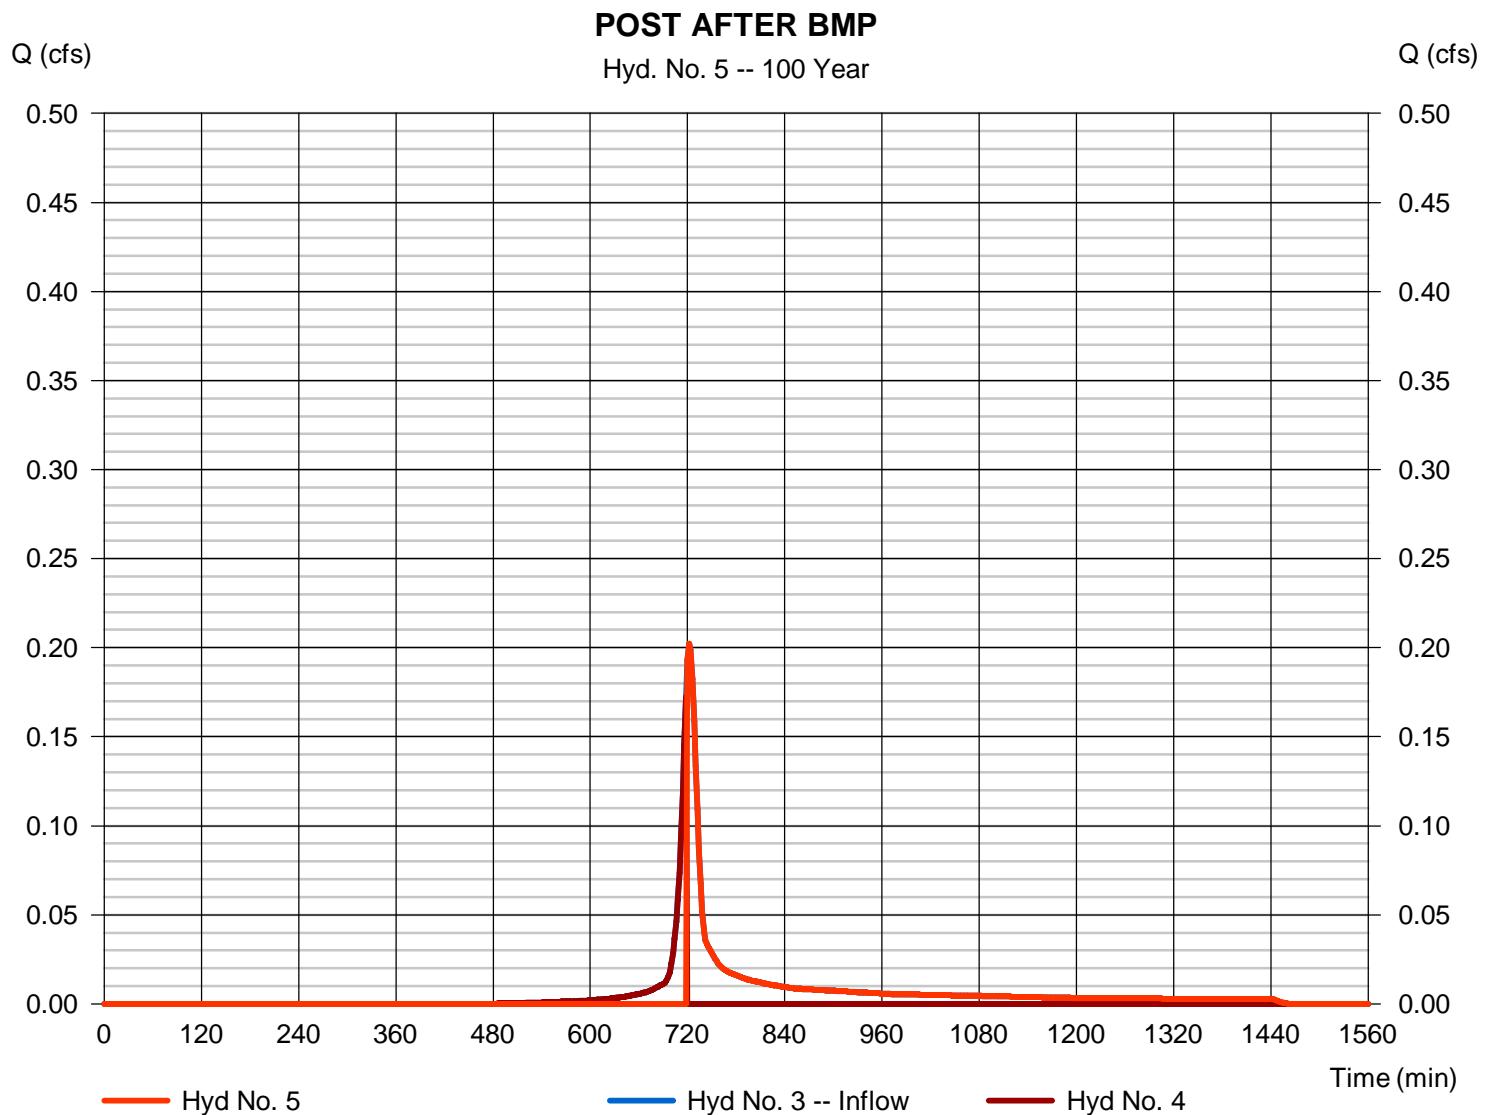

# Hydrograph Report


Hydraflow Hydrographs Extension for AutoCAD® Civil 3D® 2015 by Autodesk, Inc. v10.4

Sunday, 11 / 6 / 2016

## Hyd. No. 6

### POST AT POI DA2

Hydrograph type	= Combine	Peak discharge	= 0.668 cfs
Storm frequency	= 100 yrs	Time to peak	= 720 min
Time interval	= 2 min	Hyd. volume	= 1,525 cuft
Inflow hyds.	= 2, 5	Contrib. drain. area	= 0.100 ac

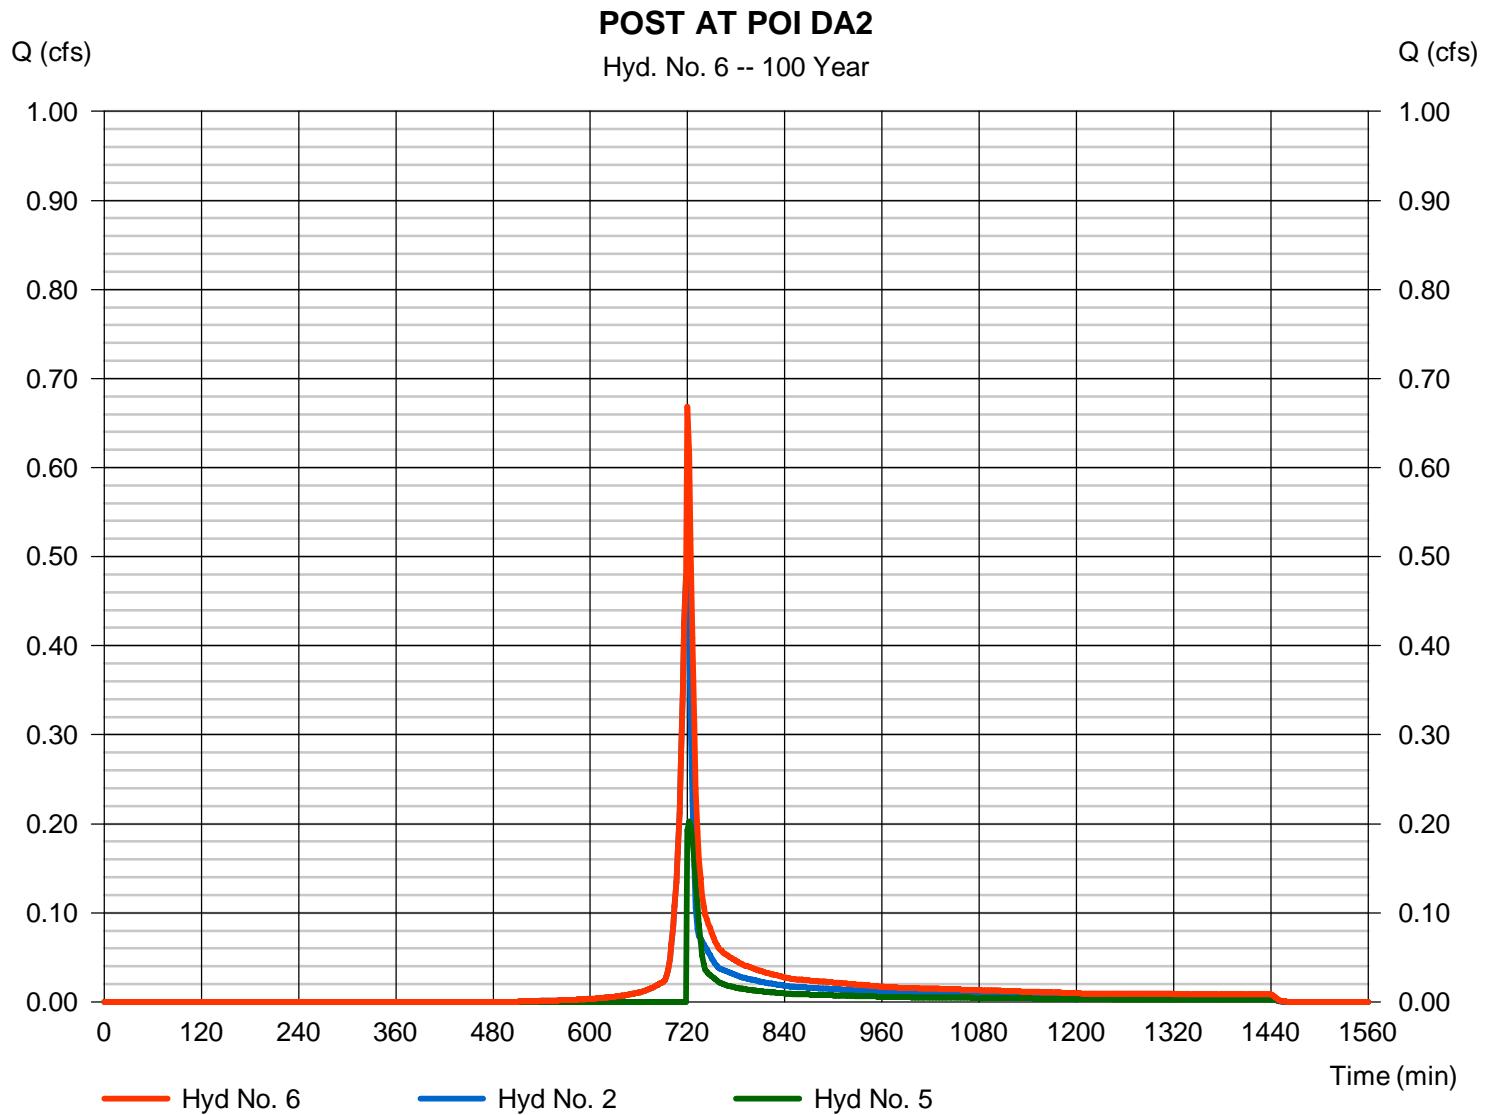

# Hydraflow Rainfall Report

Return Period (Yrs)	Intensity-Duration-Frequency Equation Coefficients (FHA)			
	B	D	E	(N/A)
1	39.9938	10.0000	0.8826	-----
2	46.8600	10.1000	0.8723	-----
3	0.0000	0.0000	0.0000	-----
5	47.4204	9.3000	0.8196	-----
10	26589.4199	47.3998	2.1160	-----
25	53942.1797	51.5998	2.2139	-----
50	69308.7266	52.6998	2.2395	-----
100	106327.6016	55.1997	2.2977	-----

File name: Charger IDF.IDF

$$\text{Intensity} = B / (T_c + D)^E$$

Return Period (Yrs)	Intensity Values (in/hr)											
	5 min	10	15	20	25	30	35	40	45	50	55	60
1	3.66	2.84	2.33	1.99	1.73	1.54	1.39	1.27	1.16	1.08	1.00	0.94
2	4.39	3.42	2.82	2.40	2.10	1.87	1.69	1.54	1.42	1.32	1.23	1.15
3	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
5	5.36	4.19	3.47	2.98	2.62	2.34	2.12	1.94	1.80	1.67	1.56	1.47
10	6.12	5.04	4.23	3.59	3.09	2.68	2.35	2.07	1.84	1.65	1.48	1.34
25	7.10	5.89	4.95	4.22	3.63	3.16	2.77	2.45	2.17	1.94	1.75	1.58
50	7.88	6.54	5.51	4.70	4.05	3.52	3.09	2.73	2.42	2.17	1.95	1.76
100	8.66	7.21	6.09	5.20	4.48	3.90	3.42	3.02	2.69	2.40	2.16	1.95

Tc = time in minutes. Values may exceed 60.

ESCGP-2\PPP\02 SCRO\07 PCSM\Attach 4 Stormwater Calcs\Charger\Hydraflow Rev 1\Charger Precip.pc