

**High Street**

## TETRA TECH, INC.

By: RH    Date: 11/11/2016    Subject: High Street  
Checked By: JB    Date: 11/18/2016    PCSM Design and Evaluation

### **PURPOSE:**

The purpose of these calculations is to design a Post-Construction Stormwater Management (PCSM) Plan for the High Street block valve as part of the Sunoco Pipeline L.P. Pennsylvania Pipeline Project. The site is located within Woodbury Township, Blair County, Pennsylvania. Permanent stormwater controls will be developed to satisfy PADEP requirements.

### **PCSM DESIGN REQUIREMENTS:**

The PCSM design for this project follows the PA Department of Environmental Protection's (PADEP) Pennsylvania Stormwater Best Management Practices Manual (BMP Manual), December 2006; and the standard design criteria from PA Title 25, Chapter 102.8.(g)(2) and (3). The design criteria evaluated for the site are summarized below.

#### **Act 167 Consistency**

Blair County does not have an approved Act 167 Stormwater Management Plan, therefore, the county has adopted the PADEP Chapter 102 regulations as their county-wide stormwater guidance.

#### **Recommended Volume Control Guideline**

Use of Control Guideline 1 is recommended where site conditions offer the opportunity to reduce the increase in runoff volume as follows:

- Do not increase the post-development total runoff volume for all storms equal to or less than the two-year/24-hour event;
- Existing (pre-development) non-forested pervious areas must be considered meadow (good condition) or its equivalent; and
- 20 percent of existing impervious area, when present, shall be considered meadow (good condition) or its equivalent.

This site will utilize an infiltration berm to manage the two-year/24-hour volume increase.

#### **Recommended Peak Rate Control Guideline**

The recommended control guideline for peak rate control is:

- Do not increase the peak rate of discharge for the 2-year through 100-year events (at minimum).

This site will utilize an infiltration berm to manage the two-year through 100-year peak rate increases. This BMP, in conjunction with a diversion berm and level spreader, will also help to increase the time of concentration for the drainage area encompassing the block valve.

## **Recommended Water Quality Control Guideline**

Control Guideline 1 will provide water quality control and stream channel protection as well as flood control protection.

### **Infiltration**

Infiltration rates for the PCSM BMPs have been determined from site infiltration testing conducted in accordance of the PA BMP Manual. Documentation for infiltration testing and design infiltration rates can be found in Attachment 5 of the Site Restoration/Post Construction Stormwater Management Plan. Infiltration test locations and recommended design rates are also labeled on the PCSM Plan Drawings in Attachment 6.

During the onsite infiltration tests, the depth to seasonal high groundwater and shallow bedrock or another confining layer were evaluated. The post-construction stormwater management facility for the site has been designed to maintain 2 feet of separation between the ponding elevation of the facility and the seasonal high water table and bedrock.

The post-construction stormwater management design will utilize onsite infiltration to meet Volume Control Guideline 1.

### **Loading Ratio**

Loading ratios have been considered for the design of infiltration BMPs. In general, the following Loading Ratio guidelines are recommended:

- Maximum Impervious Loading Ratio of 5:1 relating impervious drainage area to infiltration area.
- Maximum Drainage Area Loading Ratio of 8:1 relating total drainage area to infiltration area.

The maximum impervious loading ratio of 5:1 has been met. The impervious loading ratio for the site is 1.7:1.

The drainage area loading ratio for the site is 15.3:1. However, runoff from the site and upslope drainage area will be dispersed to a relatively long infiltration berm. The infiltration berm has been placed to maximum the loading ratio to the maximum extent practicable, and other infiltration design parameters from the PA Stormwater BMP Manual have been met.

### **Disturbed Area**

To meet Standard Worksheet 10 guidelines, 90% of the disturbed area is contained by the proposed PCSM BMPs.

### **Karst Topography**

High Street block valve is located in an area of karst terrain. Several design principles were incorporated to minimize the risk of sinkholes to the maximum extent practicable, including reducing the proposed impervious area to the maximum extent practicable.

Stormwater runoff from the site is being spread out over a relatively large area. The site will achieve a 1.7:1 impervious loading ratio by directing stormwater runoff into a long infiltration berm. The infiltration berm will avoid concentrating stormwater runoff and will encourage relatively shallow and broad ponding areas.

Additional post-construction inspection and maintenance will be required onsite as documented in the Sinkhole Repair Plan in Attachment 2. In areas of known karst terrain, stormwater BMPs shall be inspected at regular intervals of at least once every quarter for the first two years following installation and then at regular periods thereafter. Inspections shall also be made after every storm event greater than 1 inch during the establishment period. Inspections shall consist of an examination of any noticeable subsidence, surface depressions, or sinkholes. Inspections shall include an evaluation of all inlet and outlet structures and document any areas to be cleaned, maintained, or repaired.

### **Special Protection Watershed**

High Street block valve is located within a special protection watershed. The project site was designed to minimize the total amount of impervious area. The impervious area for the High Street block valve was limited to the amount that is required to safely construct and operate the block valve. In addition, the previously proposed gravel turn-around was eliminated, and replaced with a grass area.

Non-discharge alternatives were analyzed for this block valve site. The location of the High Street block valve site was evaluated by ASME B31.4 Valve Spacing 434.15.2(e) which states that mainline valves should not be more than 7.5 miles apart. The valve sites were located in such a way that they avoided environmentally sensitive areas (such as wetlands and floodplains), were close to an existing road, and close to power. Land owner preference was also accounted for while locating the block valve sites. Once all of these factors were taken into account, several block valve sites, including High Street, were located in special protection watersheds.

Non-discharge alternatives were also considered when determining the type of BMP proposed. High Street block valve site utilizes an infiltration berm to manage stormwater. Stormwater runoff is infiltrated to the maximum extent possible. Stormwater runoff is spread out to flow through areas that have been restored to meadow conditions, to the infiltration berm, or to undisturbed area. There will not be an increase in stormwater runoff rate or volume to prevent the physical degradation of the receiving water, such as scour, and stream bank destabilization. Stormwater runoff volume is not increasing throughout post-construction, and any post-construction stormwater discharge is managed so that it will not degrade the physical, chemical or biological characteristics of the receiving stream.


Runoff from the site will be managed by a downslope infiltration berm. Pondered runoff will be temporarily stored upslope of the berm until it infiltrates and filters through the soil media. Due to the design of the berm, which maintains a constant elevation through the entire berm length, the stormwater runoff will be released in sheet flow down a stabilized slope, without causing erosion, rather than concentrating the flow. Filtration through the existing vegetation and soil is an efficient way to remove suspended stormwater pollutants such as sediment, as the suspended particles are physically filtered from the stormwater as it flows through the vegetation and percolates into the soil.

The extent of the disturbed area will be minimized, and the duration of disturbance will be minimized by stabilizing disturbed areas as soon as practicable. Cut and fill for the project site has been minimized. Where possible based on the criteria listed above, sites were located in areas with shallow slopes to minimize the amount of cut and fill required. There is minimal cut and fill required at the High Street block

valve site. All of the block valve sites were graded towards the natural slope. No direct discharge to surface water occurs at the site. The site will be restored promptly with proper vegetative cover techniques.


Antidegradation requirements for the special protection watershed are met because the post-construction stormwater infiltration volume equals or exceeds the pre-construction stormwater infiltration volume, and post-construction stormwater discharge is pretreated via infiltration berms. The runoff is managed so that it will not degrade the physical, chemical, or biological characteristics of the receiving stream.

Aerial photograph provided by ESRI's ArcGIS Online World Imagery map service (© 2015 ESRI and its data suppliers).

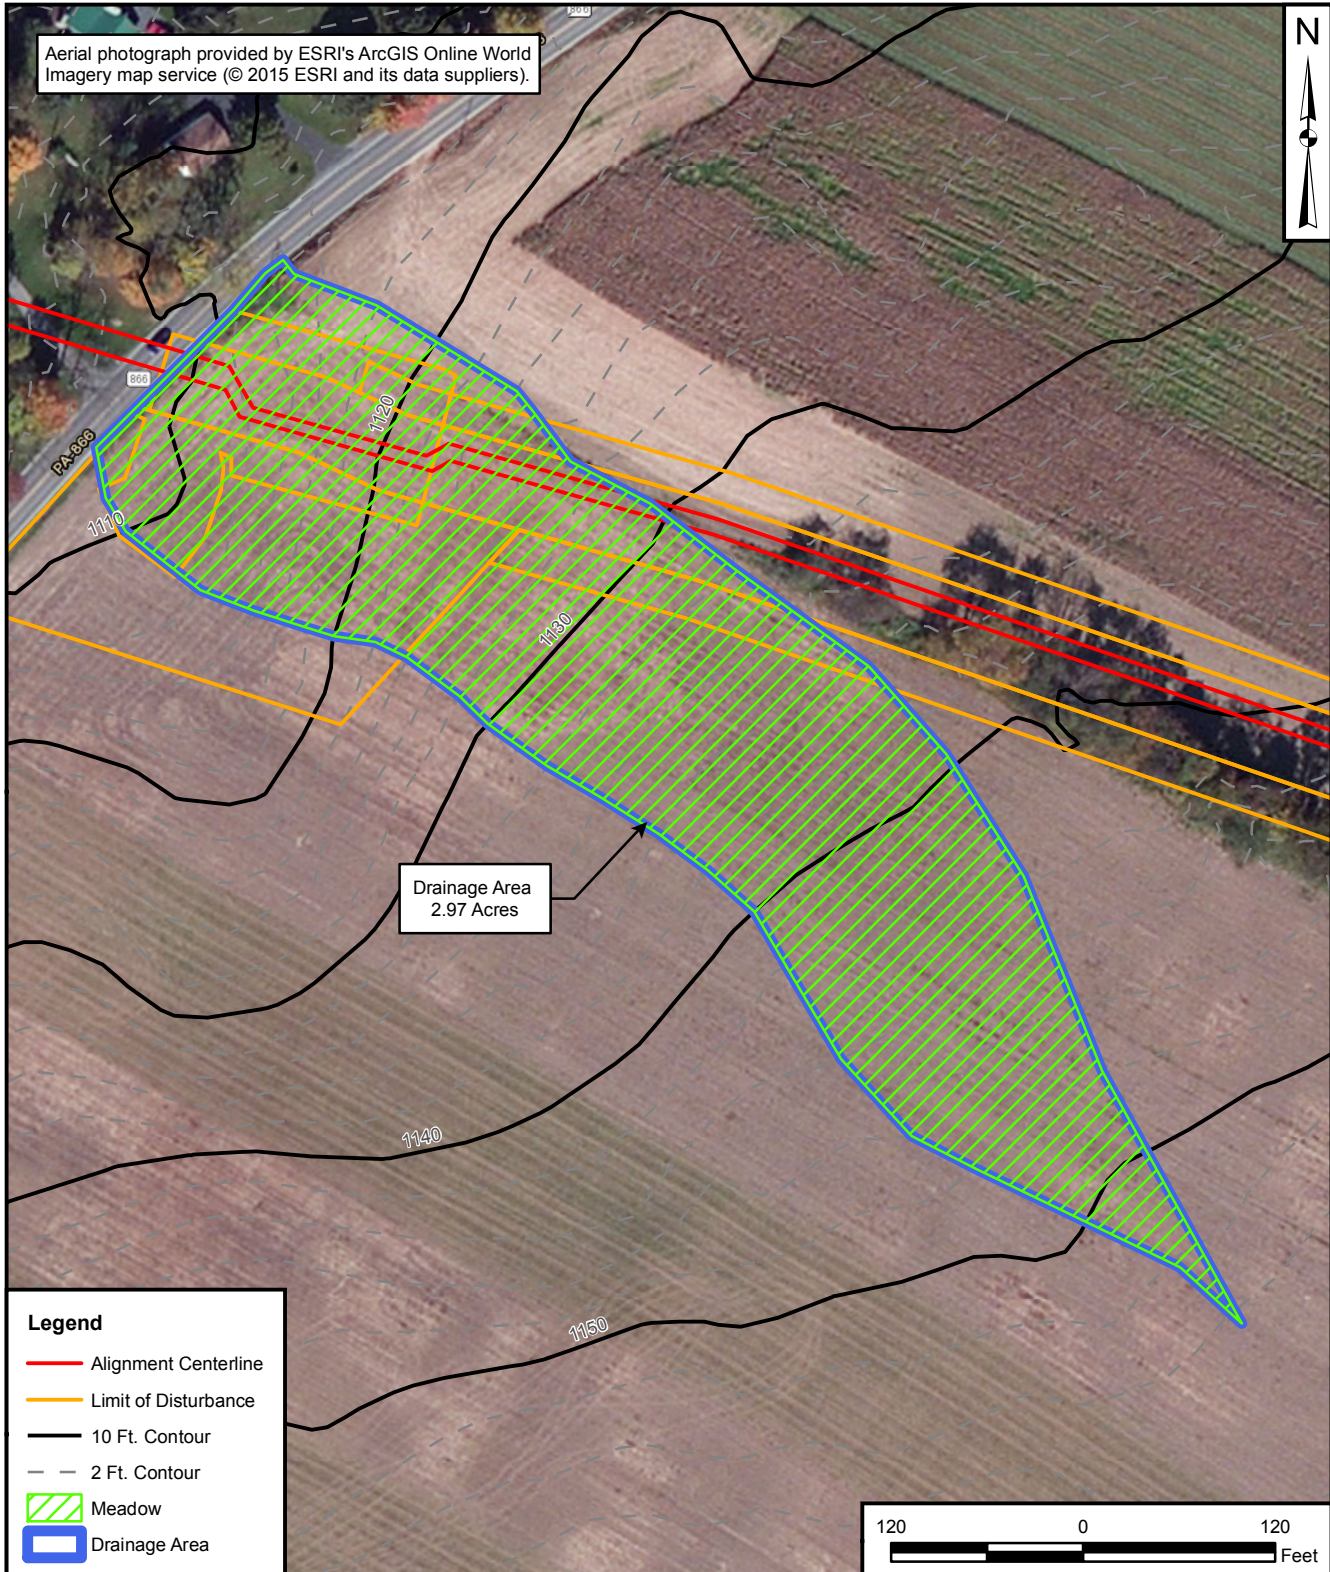

**Legend**

- Alignment Centerline
- Limit of Disturbance
- 10 Ft. Contour
- 2 Ft. Contour
- Meadow
- Drainage Area




PRE-DEVELOPMENT DRAINAGE AREA MAP  
 HIGH STREET  
 PENNSYLVANIA PIPELINE PROJECT  
 SUNOCO LOGISTICS, L.P.  
 BLAIR COUNTY, PENNSYLVANIA

DRAWN BY: S. PAXTON 05/21/16  
 CHECKED BY: J. BRODY 11/09/16  
 APPROVED BY:  
 CONTRACT NUMBER: 112IC05958

FIGURE NUMBER	REV
1	0




Aerial photograph provided by ESRI's ArcGIS Online World Imagery map service (© 2015 ESRI and its data suppliers).

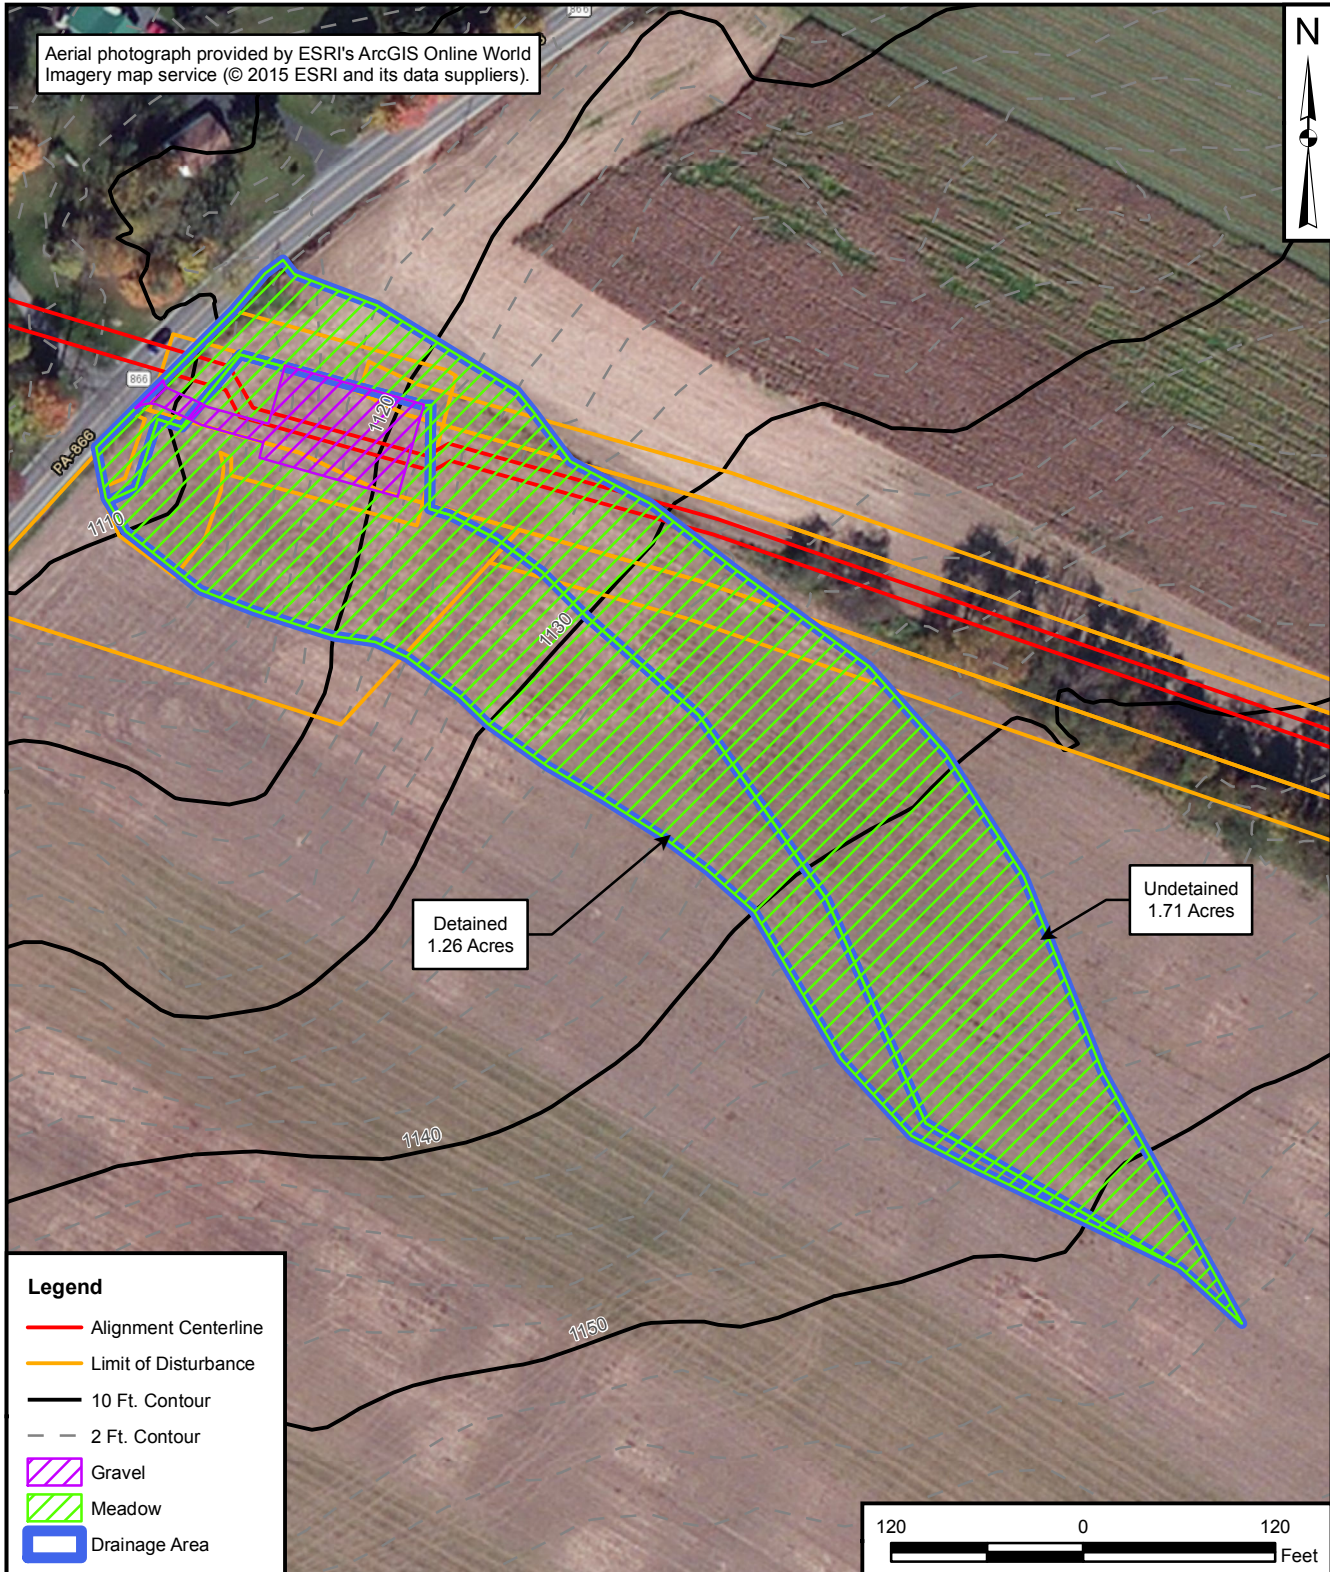

**Legend**

- Alignment Centerline
- Limit of Disturbance
- 10 Ft. Contour
- 2 Ft. Contour
- Gravel
- Meadow
- Drainage Area



**POST-DEVELOPMENT DRAINAGE AREA MAP**  
**HIGH STREET**  
**PENNSYLVANIA PIPELINE PROJECT**  
**SUNOCO LOGISTICS, L.P.**  
**BLAIR COUNTY, PENNSYLVANIA**

DRAWN BY: S. PAXTON 05/21/16  
 CHECKED BY: J. BRODY 11/09/16  
 APPROVED BY:  
 CONTRACT NUMBER: 112IC05958

FIGURE NUMBER	REV
2	0

**NOAA Atlas 14, Volume 2, Version 3**  
**Location name: Woodbury Twp, Pennsylvania,**  
**USA\***



**Latitude: 40.4324°, Longitude: -78.2645°**  
**Elevation: 1108.54 ft\*\***



\* source: ESRI Maps  
 \*\* source: USGS

**POINT PRECIPITATION FREQUENCY ESTIMATES**

G.M. Bonnin, D. Martin, B. Lin, T. Parzybok, M.Yekta, and D. Riley  
 NOAA, National Weather Service, Silver Spring, Maryland

[PF\\_tabular](#) | [PF\\_graphical](#) | [Maps\\_&\\_aerials](#)

**PF tabular**

<b>PDS-based point precipitation frequency estimates with 90% confidence intervals (in inches)<sup>1</sup></b>										
Duration	Average recurrence interval (years)									
	1	2	5	10	25	50	100	200	500	1000
5-min	0.311 (0.279-0.348)	0.372 (0.334-0.416)	0.453 (0.406-0.505)	0.517 (0.461-0.575)	0.601 (0.533-0.667)	0.667 (0.588-0.739)	0.733 (0.643-0.811)	0.802 (0.699-0.886)	0.897 (0.774-0.990)	0.970 (0.829-1.07)
10-min	0.483 (0.433-0.541)	0.581 (0.521-0.649)	0.704 (0.630-0.785)	0.798 (0.712-0.888)	0.919 (0.815-1.02)	1.01 (0.892-1.12)	1.10 (0.968-1.22)	1.20 (1.04-1.32)	1.32 (1.14-1.46)	1.41 (1.21-1.55)
15-min	0.592 (0.531-0.663)	0.710 (0.637-0.794)	0.864 (0.774-0.964)	0.981 (0.876-1.09)	1.14 (1.01-1.26)	1.25 (1.10-1.39)	1.37 (1.20-1.52)	1.49 (1.30-1.65)	1.65 (1.42-1.81)	1.76 (1.51-1.94)
30-min	0.784 (0.703-0.877)	0.950 (0.852-1.06)	1.18 (1.06-1.32)	1.36 (1.22-1.52)	1.60 (1.42-1.78)	1.79 (1.58-1.98)	1.98 (1.74-2.19)	2.17 (1.89-2.40)	2.44 (2.10-2.69)	2.65 (2.26-2.91)
60-min	0.957 (0.858-1.07)	1.17 (1.05-1.30)	1.49 (1.33-1.66)	1.73 (1.55-1.93)	2.08 (1.84-2.31)	2.36 (2.08-2.61)	2.65 (2.32-2.93)	2.95 (2.57-3.26)	3.37 (2.91-3.72)	3.71 (3.17-4.09)
2-hr	1.10 (0.981-1.24)	1.34 (1.19-1.51)	1.71 (1.51-1.92)	2.00 (1.77-2.25)	2.41 (2.12-2.70)	2.75 (2.40-3.07)	3.11 (2.69-3.47)	3.50 (3.00-3.89)	4.05 (3.44-4.50)	4.50 (3.78-5.00)
3-hr	1.19 (1.06-1.34)	1.44 (1.29-1.63)	1.82 (1.63-2.05)	2.13 (1.89-2.39)	2.57 (2.27-2.87)	2.93 (2.57-3.26)	3.32 (2.89-3.69)	3.74 (3.23-4.15)	4.34 (3.70-4.81)	4.84 (4.08-5.34)
6-hr	1.49 (1.34-1.67)	1.79 (1.61-2.01)	2.23 (2.01-2.50)	2.60 (2.32-2.91)	3.12 (2.77-3.48)	3.56 (3.14-3.95)	4.02 (3.52-4.45)	4.51 (3.92-4.99)	5.23 (4.48-5.77)	5.82 (4.93-6.41)
12-hr	1.83 (1.65-2.07)	2.21 (1.98-2.48)	2.74 (2.46-3.08)	3.19 (2.84-3.57)	3.84 (3.40-4.28)	4.38 (3.85-4.88)	4.97 (4.33-5.51)	5.61 (4.85-6.21)	6.55 (5.57-7.23)	7.33 (6.16-8.08)
24-hr	2.23 (2.04-2.45)	2.67 (2.44-2.94)	3.33 (3.04-3.66)	3.87 (3.52-4.25)	4.65 (4.21-5.08)	5.30 (4.78-5.79)	5.99 (5.37-6.54)	6.74 (6.00-7.35)	7.82 (6.89-8.54)	8.71 (7.60-9.51)
2-day	2.56 (2.34-2.81)	3.07 (2.81-3.37)	3.81 (3.48-4.19)	4.42 (4.04-4.86)	5.32 (4.82-5.83)	6.06 (5.47-6.63)	6.87 (6.15-7.51)	7.73 (6.87-8.45)	8.98 (7.88-9.83)	10.0 (8.69-11.0)
3-day	2.72 (2.50-2.98)	3.26 (3.00-3.57)	4.03 (3.71-4.41)	4.67 (4.29-5.11)	5.60 (5.11-6.11)	6.37 (5.78-6.94)	7.20 (6.49-7.84)	8.08 (7.23-8.81)	9.35 (8.27-10.2)	10.4 (9.09-11.4)
4-day	2.88 (2.67-3.14)	3.45 (3.19-3.77)	4.26 (3.93-4.64)	4.92 (4.54-5.36)	5.88 (5.40-6.39)	6.68 (6.10-7.25)	7.53 (6.82-8.17)	8.44 (7.59-9.16)	9.73 (8.66-10.6)	10.8 (9.50-11.8)
7-day	3.39 (3.16-3.66)	4.05 (3.77-4.38)	4.94 (4.59-5.33)	5.65 (5.25-6.09)	6.64 (6.14-7.15)	7.43 (6.84-8.00)	8.25 (7.56-8.89)	9.11 (8.29-9.83)	10.3 (9.27-11.1)	11.2 (10.0-12.2)
10-day	3.94 (3.68-4.22)	4.68 (4.37-5.02)	5.62 (5.24-6.03)	6.37 (5.94-6.83)	7.40 (6.88-7.94)	8.23 (7.61-8.83)	9.07 (8.35-9.74)	9.94 (9.09-10.7)	11.1 (10.1-12.0)	12.0 (10.9-13.0)
20-day	5.39 (5.11-5.71)	6.36 (6.02-6.73)	7.43 (7.02-7.87)	8.25 (7.79-8.73)	9.33 (8.78-9.87)	10.1 (9.53-10.7)	10.9 (10.3-11.6)	11.7 (10.9-12.4)	12.7 (11.8-13.5)	13.4 (12.4-14.3)
30-day	6.74 (6.39-7.10)	7.90 (7.49-8.33)	9.08 (8.60-9.56)	9.98 (9.45-10.5)	11.1 (10.5-11.7)	12.0 (11.3-12.6)	12.8 (12.0-13.5)	13.6 (12.7-14.3)	14.5 (13.6-15.4)	15.2 (14.2-16.2)
45-day	8.54 (8.11-8.98)	9.99 (9.49-10.5)	11.3 (10.8-11.9)	12.3 (11.7-12.9)	13.5 (12.8-14.2)	14.4 (13.7-15.1)	15.2 (14.4-16.0)	15.9 (15.1-16.7)	16.8 (15.8-17.7)	17.4 (16.4-18.3)
60-day	10.3 (9.81-10.8)	12.0 (11.4-12.6)	13.5 (12.9-14.1)	14.5 (13.9-15.2)	15.8 (15.1-16.5)	16.7 (15.9-17.5)	17.4 (16.6-18.3)	18.1 (17.3-19.0)	19.0 (18.0-19.9)	19.5 (18.5-20.5)





<sup>1</sup> Precipitation frequency (PF) estimates in this table are based on frequency analysis of partial duration series (PDS). Numbers in parenthesis are PF estimates at lower and upper bounds of the 90% confidence interval. The probability that precipitation frequency estimates (for a given duration and average recurrence interval) will be greater than the upper bound (or less than the lower bound) is 5%. Estimates at upper bounds are not checked against probable maximum precipitation (PMP) estimates and may be higher than currently valid PMP values. Please refer to NOAA Atlas 14 document for more information.

[Back to Top](#)



# PF graphical

PDS-based depth-duration-frequency (DDF) curves  
Latitude: 40.4324°, Longitude: -78.2645°

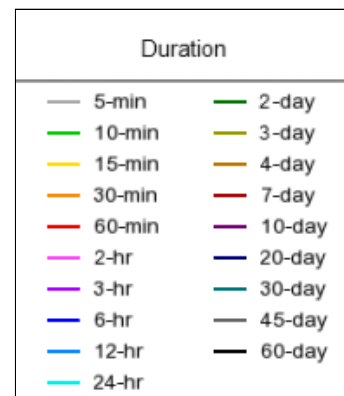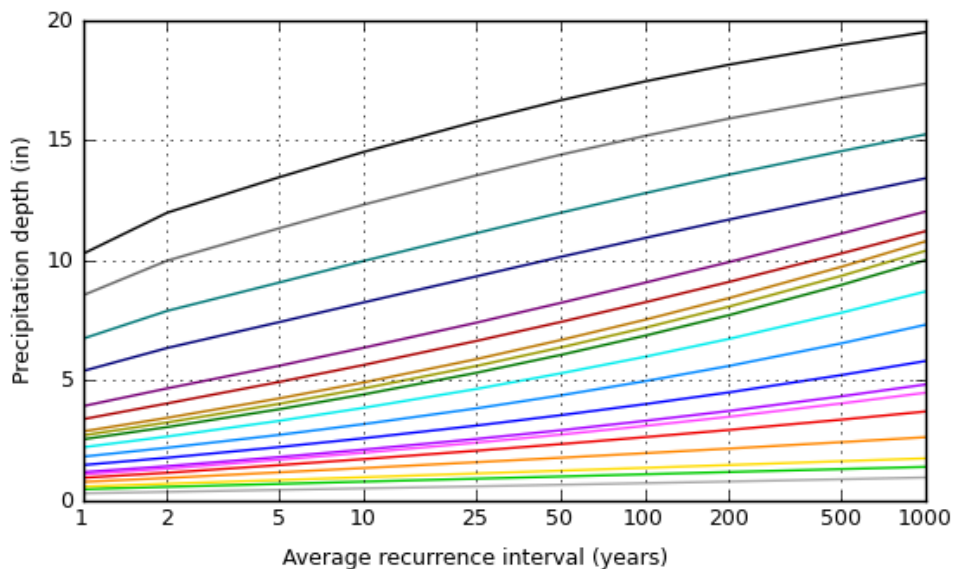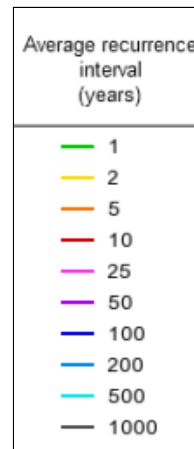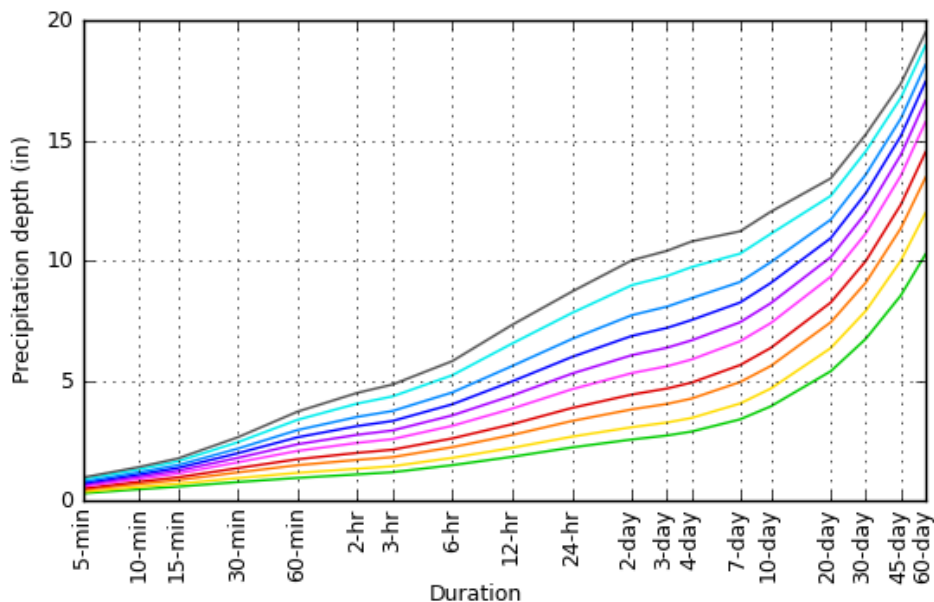


[Back to Top](#)


## Maps & aerials

### Small scale terrain




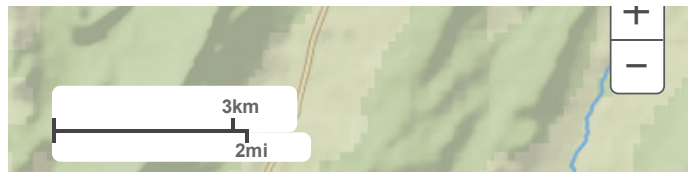


Large scale terrain

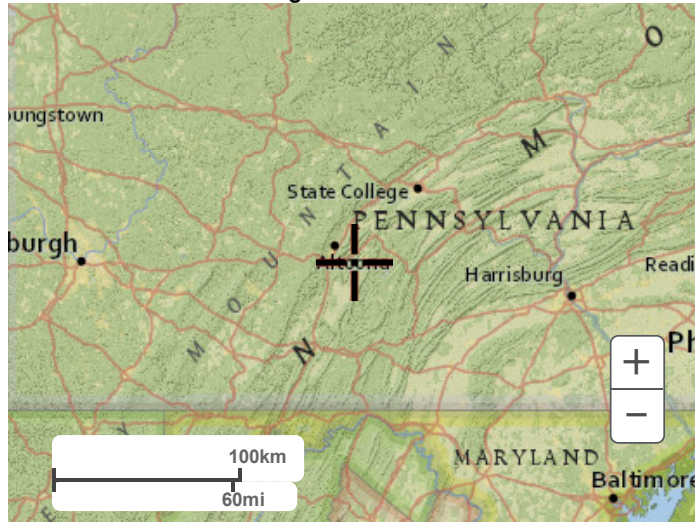

Large scale map

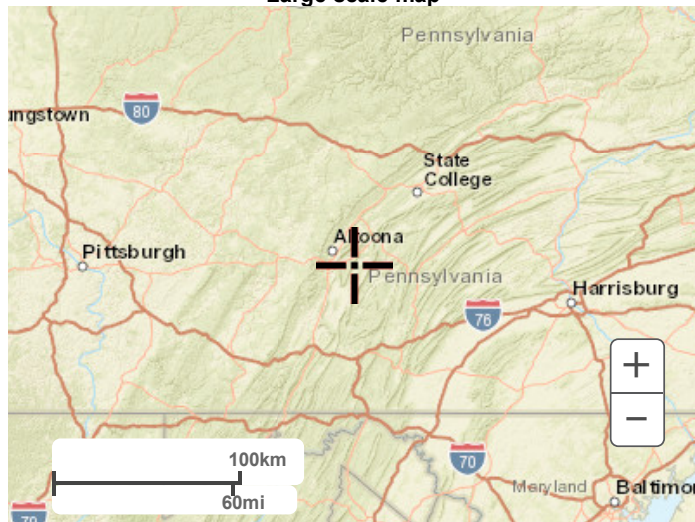

Large scale aerial

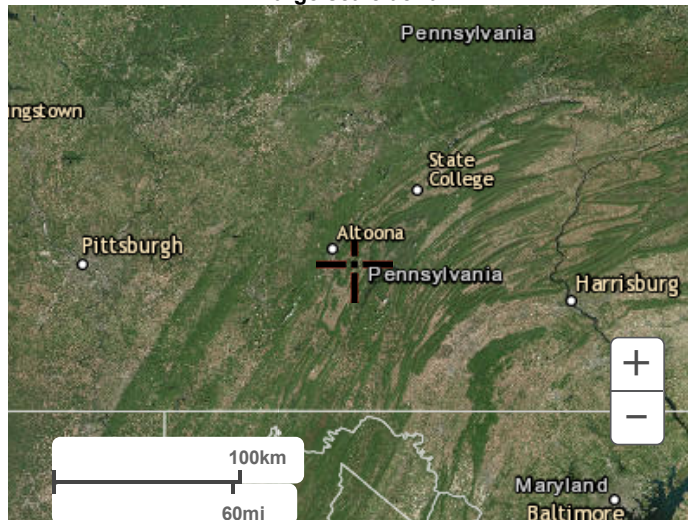

[Back to Top](#)

**WORKSHEET 1. GENERAL SITE INFORMATION**

**Date:** November 11, 2016

**Project Name:** High Street

**Municipality:** Woodbury

**County:** Blair

**Total Area (acres):** 2.97

**Major River Basin:** Susquehanna River

**Watershed:** Frankstown Branch Juniata River

**Sub Basin:** Little Juniata River

**Nearest Surface Water to Receive Runoff:** Tributary 16213 to Piney Creek

**Chapter 93 - Designated Water Use:** High Quality (HQ) - Cold Water Fishes (CWF)

**Impaired according to Chapter 303(d) list?** YES   
**List Causes of Impairment:** NO

***Is Project Subject to, or Part of:***

**Municipal Separate Storm Sewer System (MS4) Requirements** YES   
NO

**Existing or Planned drinking water supply?** YES   
NO

**If yes, distance from proposed discharge (miles):** \_\_\_\_\_

**Approved Act 167 Plan?** YES   
NO

**Existing River Conservation Plan?** YES   
NO

## Worksheet 2. Sensitive Natural Resources

### INSTRUCTIONS

1. Provide Sensitive Resources Map according to non-structural BMP 5.4.1 in Chapter 5. This map should identify wetlands, woodlands, natural drainage ways, steep slopes, and other sensitive natural areas.

See pre-development drainage area map

2. Summarize the existing extent of each sensitive resource in the Existing Sensitive Resources Table (below, using Acres). If none present, insert 0.

0.00 acres

3. Summarize Total Protected Area as defined under BMPs in Chapter 5.

0.00 acres

4. Do not count any area twice. For example, an area that is both a floodplain and a wetland may only be considered once.

EXISTING NATURAL SENSITIVE RESOURCE	MAPPED? Yes/no/n/a	TOTAL AREA (Ac.)	PROTECTED AREA (Ac.)
Waterbodies	N/A		
Floodplains	N/A		
Riparian Areas	N/A		
Wetlands	N/A		
Woodlands	N/A		
Natural Drainage Ways	N/A		
Steep Slopes, 15% - 25%	N/A		
Steep Slopes, over 25%	N/A		
Other:			
Other:			
<b>TOTAL EXISTING:</b>		<b>0.00</b>	<b>0.00</b>



## Worksheet 3. Nonstructural BMP Credits

### PROTECTED AREA

1.1 Area of Protected Sensitive/Special Value Features (see WS 2)	0.00 Ac.
1.2 Area of Riparian Forest Buffer Protection	0.00 Ac.
3.1 Area of Minimum Disturbance/Reduced Grading	0.00 Ac
<b>TOTAL</b>	<b>0.00 Ac</b>

Site Area	Minus	Protected Area	=	Stormwater Management Area
1.15	-	0	=	1.15
This is the area that requires stormwater management				

### VOLUME CREDITS

#### 3.1 Minimum Soil Compaction (See Chapter 8, page 22 – SW BMP Manual)

Lawn \_\_\_\_\_ ft<sup>2</sup> x 1/4" x 1/12 = \_\_\_\_\_ ft<sup>3</sup>

Meadow \_\_\_\_\_ ft<sup>2</sup> x 1/3" x 1/12 = \_\_\_\_\_ ft<sup>3</sup>

#### 3.3 Protect Existing Trees (See Chapter 8, page 23 – SW BMP Manual)

*For Trees within 100 feet of impervious area:*

Tree Canopy \_\_\_\_\_ ft<sup>2</sup> x 1/2" x 1/12 = \_\_\_\_\_ ft<sup>3</sup>

#### 5.1 Disconnect Roof Leaders to Vegetated Areas (See Chapter 8 page 25 – SW BMP Manual)

*For runoff directed to areas protected under 5.8.1 and 5.8.2*

Roof Area \_\_\_\_\_ ft<sup>2</sup> x 1/3" x 1/12 = \_\_\_\_\_ ft<sup>3</sup>

*For all other disconnected roof areas*

Roof Area \_\_\_\_\_ ft<sup>2</sup> x 1/4" x 1/12 = \_\_\_\_\_ ft<sup>3</sup>

#### 5.2 Disconnect Non-Roof impervious to Vegetated Areas (See Chapter 8, page 26 – SW BMP Manual)

*For Runoff directed to areas protected under 5.8.1 and 5.8.2*

Impervious Area \_\_\_\_\_ ft<sup>2</sup> x 1/3" x 1/12 = \_\_\_\_\_ ft<sup>3</sup>

*For all other disconnected roof areas*

Impervious Area \_\_\_\_\_ ft<sup>2</sup> x 1/4" x 1/12 = \_\_\_\_\_ ft<sup>3</sup>

**TOTAL NON-STRUCTURAL VOLUME CREDIT\*** \_\_\_\_\_ ft<sup>3</sup>

\*For use on Worksheet 5

## WORKSHEET 4. CHANGE IN RUNOFF VOLUME FOR 2-YR STORM EVENT

PROJECT: High Street  
 Drainage Area: 2.97 acres  
 2-Year Rainfall: 2.67 in

Total Site Area: 1.15 acres  
 Protected Site Area: N/A acres  
 Managed Site Area: 1.15 acres

### Existing Conditions

Cover Type/Condition	Soil Type	Area (sf)	Area (ac)	CN	S	la (0.2*S)	Q Runoff <sup>1</sup> (in)	Runoff Volume <sup>3</sup> (ft <sup>3</sup> )
Meadow	B	50,094	1.15	58	7.24	1.45	0.18	736
<b>TOTAL:</b>		<b>50,094</b>	<b>1.15</b>					<b>736</b>

### Developed Conditions

Cover Type/Condition	Soil Type	Area (sf)	Area (ac)	CN	S	la (0.2*S)	Q Runoff <sup>1</sup> (in)	Runoff Volume <sup>3</sup> (ft <sup>3</sup> )
Impervious - Gravel	B	6,534	0.15	85	1.76	0.35	1.32	716
Meadow	B	43,560	1.00	58	7.24	1.45	0.18	640
<b>TOTAL:</b>		<b>50,094</b>	<b>1.15</b>					<b>1,356</b>

2-Year Volume Increase (ft <sup>3</sup> ):	<b>620</b>
--	------------

**2-Year Volume Increase = Developed Conditions Runoff Volume - Existing Conditions Runoff Volume**

1. Runoff (in) =  $Q = (P - 0.2S)^2 / (P + 0.8S)$  where  
 P = 2-Year Rainfall (in)  
 S =  $(1000/CN) - 10$

2. Runoff Volume (CF) =  $Q \times \text{Area} \times 1/12$   
 Q = Runoff (in)  
 Area = Land use area (sq. ft.)

**Note: Runoff Volume must be calculated for EACH land use type/condition and HSGI.  
 The use of a weighted CN value for volume calculations is not acceptable.**

Worksheet 5. Structural BMP Volume Credits

PROJECT: High Street  
 SUB-BASIN: \_\_\_\_\_

Required Control Volume (ft <sup>3</sup> ) - from Worksheet 4:	620
Non-structural Volume Credit (ft <sup>3</sup> ) - from Worksheet 3: (maximum is 25% of required volume)	N/A
<b>Structural Volume Reqmt (ft<sup>3</sup>)</b> <i>(Required Control Volume minus Non-structural Credit)</i>	<b>620</b>

Proposed BMPs from PA Stormwater Best Management Practices Manual Chapter 6	Area (ft <sup>2</sup> )	Volume Reduction Permanently Removed (ft <sup>3</sup> )
6.4.1 Porous Pavement		
6.4.2 Infiltration Basin		
6.4.3 Infiltration Bed		
6.4.4 Infiltration Trench		
6.4.5 Rain Garden/Bioretenion		
6.4.6 Dry Well/Seepage Pit		
6.4.7 Constructed Filter		
6.4.8 Vegetated Swale		
6.4.9 Vegetated Filter Strip		
6.4.10 Berm	2,325	1,172
6.5.1 Vegetated Roof		
6.5.2 Capture and Re-Use		
6.6.1 Constructed Wetlands		
6.6.2 Wet Pond/Retention Basin		
6.7.1 Riparian Buffer/Riparian Forest Buffer Restoration		
6.7.2 Landscape Restoration/Reforestation		
6.7.3 Soil Amendment		
6.8.1 Level Spreader		
6.8.2 Special Storage Areas		
Other:		
<b>Total Structural Volume (ft<sup>3</sup>):</b>		<b>1,172</b>
<b>Structural Volume Requirement (ft<sup>3</sup>):</b>		<b>620</b>
<b>DIFFERENCE:</b>		<b>-552</b>

**VOLUME CREDIT DETERMINATION**

- 1 Detained area runoff volume from Hydraflow = 1,172 cf
- 2 Storage volume of the BMPs = 2,700 cf
- 3 Infiltrated volume within 72 hours after the 2-yr/24-hr event  
(Infiltration Rate/12) x Infiltration Area x 72 hrs = 1,172 cf

Potential infiltrated volume = 10,761 cf. Since this is greater than the storage volume, only the storage volume can be used and assumed to infiltrate within 72 hours.

## WORKSHEET 10. WATER QUALITY COMPLIANCE FOR NITRATE

*Does the site design incorporate the following BMPs to address nitrate pollution? A summary "yes" rating is achieved if at least 2 Primary BMPs for nitrate are provided across the site or 4 secondary BMPs for nitrate are provided across the site (or the*

**PRIMARY BMPs FOR NITRATE:**

	YES	NO
NS BMP 5.4.2 - Protect / Conserve / Enhance Riparian Buffers	<input type="checkbox"/>	<input type="checkbox"/>
NS BMP 5.5.4 - Cluster Uses at Each Site	<input type="checkbox"/>	<input type="checkbox"/>
NS BMP 5.6.1 - Minimize Total Disturbed Area	<input checked="" type="checkbox"/>	<input type="checkbox"/>
NS BMP 5.6.3 - Re-Vegetate / Re-Forest Disturbed Areas (Native Species)	<input checked="" type="checkbox"/>	<input type="checkbox"/>
NS BMP 5.9.1 - Street Sweeping / Vacuuming	<input type="checkbox"/>	<input type="checkbox"/>
Structural BMP 6.7.1 - Riparian Buffer Restoration	<input type="checkbox"/>	<input type="checkbox"/>
Structural BMP 6.7.2 - Landscape Restoration	<input type="checkbox"/>	<input type="checkbox"/>

**SECONDARY BMPs FOR NITRATE:**

NS BMP 5.4.1 - Protect Sensitive / Special Value Features	<input type="checkbox"/>	<input type="checkbox"/>
NS BMP 5.4.3 - Protect / Utilize Natural Drainage Features	<input type="checkbox"/>	<input type="checkbox"/>
NS BMP 5.6.2 - Minimize Soil Compaction	<input checked="" type="checkbox"/>	<input type="checkbox"/>
Structural BMP 6.4.5 - Rain Garden / Bioretention	<input type="checkbox"/>	<input type="checkbox"/>
Structural BMP 6.4.8 - Vegetated Swale	<input type="checkbox"/>	<input type="checkbox"/>
Structural BMP 6.4.9 - Vegetated Filter Strip	<input type="checkbox"/>	<input type="checkbox"/>
Structural BMP 6.6.1 - Constructed Wetland	<input type="checkbox"/>	<input type="checkbox"/>
Structural BMP 6.7.1 - Riparian Buffer Restoration	<input type="checkbox"/>	<input type="checkbox"/>
Structural BMP 6.7.2 - Landscape Restoration	<input type="checkbox"/>	<input type="checkbox"/>
Structural BMP 6.7.3 - Soils Amendment/Restoration	<input checked="" type="checkbox"/>	<input type="checkbox"/>



**TIME OF CONCENTRATION ADJUSTMENT**

POST CONSTRUCTION TC TO BMP (DETAINED TC) BEFORE ADJUSTMENT

11.7 MIN

STRUCTURAL VOLUME PROVIDED BY BMP

1,172 CF FOR 2-YR/24-HR STORM EVENT  
2700 CF FOR ALL REMAINING STORM EVENTS

RATES OF RUNOFF TO THE BMP (FROM HYDRAFLOW REPORT)

Storm Event	Q (CFS)
2 YR/24 HR	0.223
10 YR/24 HR	1.157
50 YR/24 HR	2.7
100 YR/24 HR	3.54

ADDITIONAL RESIDENCE TIME (MIN) = (STRUCTURAL VOLUME PROVIDED BY BMP / RATE OF RUNOFF TO BMP) / 60

Storm Event	Q (CFS)	Additional Residence Time (min.)
2 YR/24 HR	0.223	87.593
10 YR/24 HR	1.157	38.894
50 YR/24 HR	2.700	16.667
100 YR/24 HR	3.540	12.712

ADJUSTED TC = POST CONSTRUCTION TC TO BMP BEFORE ADJUSTMENT + ADDITIONAL RESIDENCE TIME

Storm Event	Q (CFS)	Additional Residence Time (min.)	Adjusted Time of Concentration (min.)
2 YR/24 HR	0.223	87.593	99.293
10 YR/24 HR	1.157	38.894	50.594
50 YR/24 HR	2.700	16.667	28.367
100 YR/24 HR	3.540	12.712	24.412

INFILTRATION BERM DEWATERING CALCULATION

SITE NAME: HIGH ST

---

STORAGE VOLUME 2,700 CF  
DESIGN INFILTRATION RATE 0.50 IN/HR BASED ON A AND IT-01  
INFILTRATION AREA 3,587 SF

DEWATERING TIME = STORAGE VOLUME / ((DESIGN INFILTRATION RATE /12) \* INFILTRATION AREA)

**DEWATERING TIME = 18.1 HOURS**

## Underdrain Report

Label	Solve For	Friction Method	Roughness Coefficient
UNDERDRAIN DETAINED 1	Full Flow Capacity	Manning Formula	0.012
UNDERDRAIN DETAINED 2	Full Flow Capacity	Manning Formula	0.012

Channel Slope (ft/ft)	Normal Depth (ft)	Diameter (ft)	Discharge (ft <sup>3</sup> /s)
0.01900	0.33	0.33	0.28
0.00500	0.33	0.33	0.15

Flow Area (ft <sup>2</sup> )	Wetted Perimeter (ft)	Hydraulic Radius (ft)	Top Width (ft)
0.09	1.05	0.08	0.00
0.09	1.05	0.08	0.00

Critical Depth (ft)	Percent Full (%)	Critical Slope (ft/ft)	Velocity (ft/s)
0.29	100.0	0.01708	3.26
0.21	100.0	0.00897	1.67

Velocity Head (ft)	Specific Energy (ft)	Froude Number	Maximum Discharge (ft <sup>3</sup> /s)
0.16	0.50	0.00	0.31
0.04	0.38	0.00	0.16

Discharge Full (ft <sup>3</sup> /s)	Slope Full (ft/ft)	Flow Type	Notes
-------------------------------------	--------------------	-----------	-------

---

## Underdrain Report

---


Discharge Full (ft <sup>3</sup> /s)	Slope Full (ft/ft)	Flow Type	Notes
0.28	0.01900	SubCritical	
0.15	0.00500	SubCritical	

Messages



# Watershed Model Schematic

Hydraflow Hydrographs Extension for AutoCAD® Civil 3D® 2015 by Autodesk, Inc. v10.4

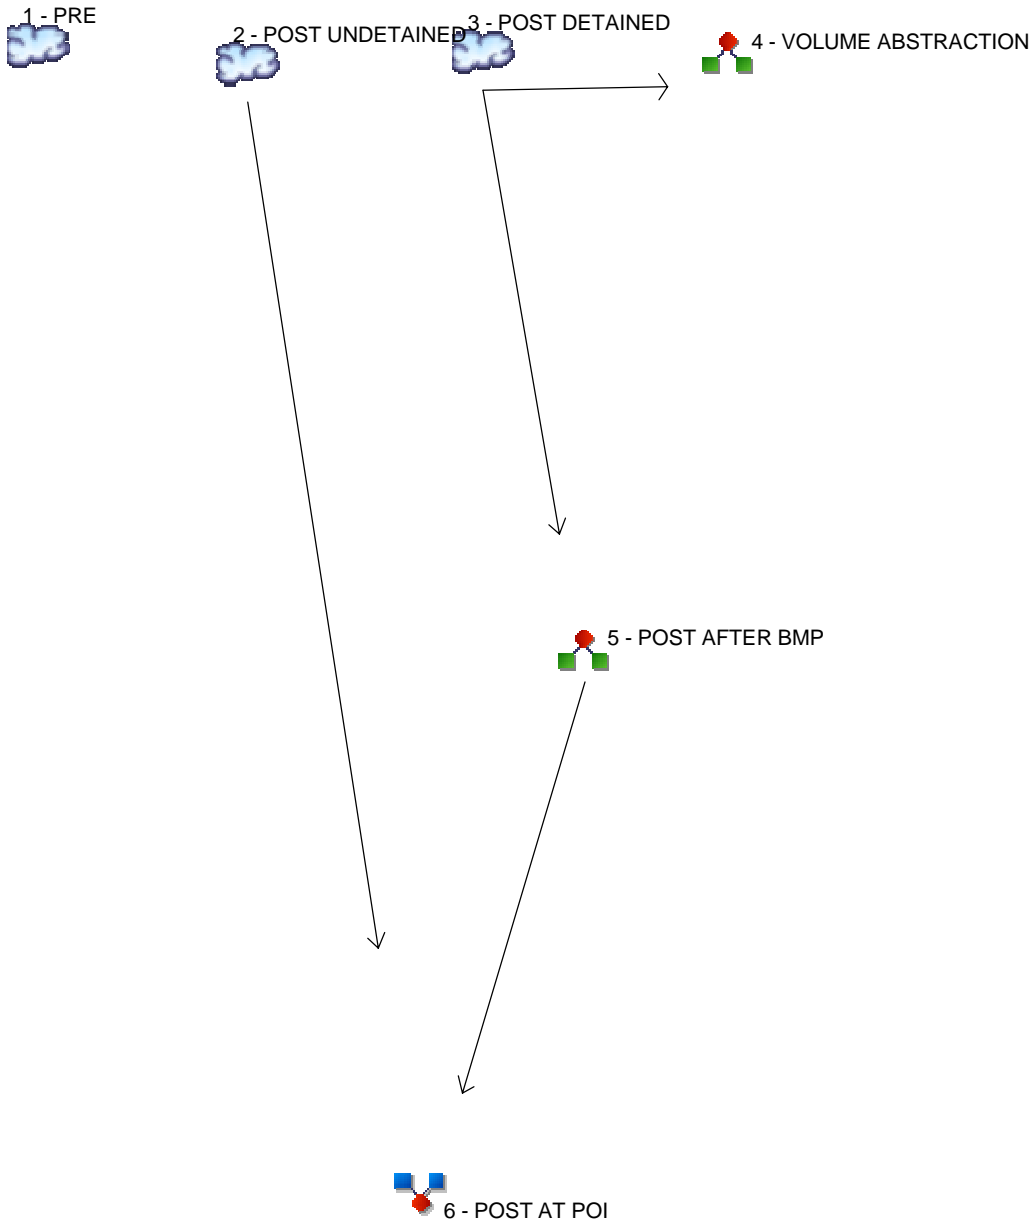

**Legend**

Hyd. Origin	Description
1 SCS Runoff	PRE
2 SCS Runoff	POST UNDETAINED
3 SCS Runoff	POST DETAINED
4 Diversion1	VOLUME ABSTRACTION
5 Diversion2	POST AFTER BMP
6 Combine	POST AT POI

# Hydrograph Return Period Recap

Hydroflow Hydrographs Extension for AutoCAD® Civil 3D® 2015 by Autodesk, Inc. v10.4

Hyd. No.	Hydrograph type (origin)	Inflow hyd(s)	Peak Outflow (cfs)								Hydrograph Description
			1-yr	2-yr	3-yr	5-yr	10-yr	25-yr	50-yr	100-yr	
1	SCS Runoff	-----	-----	0.223	-----	-----	1.984	-----	5.319	7.172	PRE
2	SCS Runoff	-----	-----	0.129	-----	-----	1.142	-----	3.063	4.129	POST UNDETAINED
3	SCS Runoff	-----	-----	0.223	-----	-----	1.157	-----	2.700	3.540	POST DETAINED
4	Diversion1	3	-----	0.223	-----	-----	1.157	-----	2.700	3.540	VOLUME ABSTRACTION
5	Diversion2	3	-----	0.000	-----	-----	0.046	-----	0.842	2.827	POST AFTER BMP
6	Combine	2, 5	-----	0.129	-----	-----	1.142	-----	3.063	6.166	POST AT POI

# Hydrograph Summary Report

Hydraflow Hydrographs Extension for AutoCAD® Civil 3D® 2015 by Autodesk, Inc. v10.4

Hyd. No.	Hydrograph type (origin)	Peak flow (cfs)	Time interval (min)	Time to Peak (min)	Hyd. volume (cuft)	Inflow hyd(s)	Maximum elevation (ft)	Total strge used (cuft)	Hydrograph Description	
1	SCS Runoff	0.223	2	726	1,954	-----	-----	-----	PRE	
2	SCS Runoff	0.129	2	726	1,125	-----	-----	-----	POST UNDETAINED	
3	SCS Runoff	0.223	2	724	1,172	-----	-----	-----	POST DETAINED	
4	Diversion1	0.223	2	724	1,172	3	-----	-----	VOLUME ABSTRACTION	
5	Diversion2	0.000	2	n/a	0	3	-----	-----	POST AFTER BMP	
6	Combine	0.129	2	726	1,125	2, 5	-----	-----	POST AT POI	
High Street.gpw					Return Period: 2 Year			Tuesday, 11 / 1 / 2016		


# Hydrograph Report

## Hyd. No. 1

PRE

Hydrograph type	= SCS Runoff	Peak discharge	= 0.223 cfs
Storm frequency	= 2 yrs	Time to peak	= 726 min
Time interval	= 2 min	Hyd. volume	= 1,954 cuft
Drainage area	= 2.970 ac	Curve number	= 58*
Basin Slope	= 0.0 %	Hydraulic length	= 0 ft
Tc method	= TR55	Time of conc. (Tc)	= 12.50 min
Total precip.	= 2.67 in	Distribution	= Type II
Storm duration	= 24 hrs	Shape factor	= 484

\* Composite (Area/CN) = [(2.966 x 58)] / 2.970

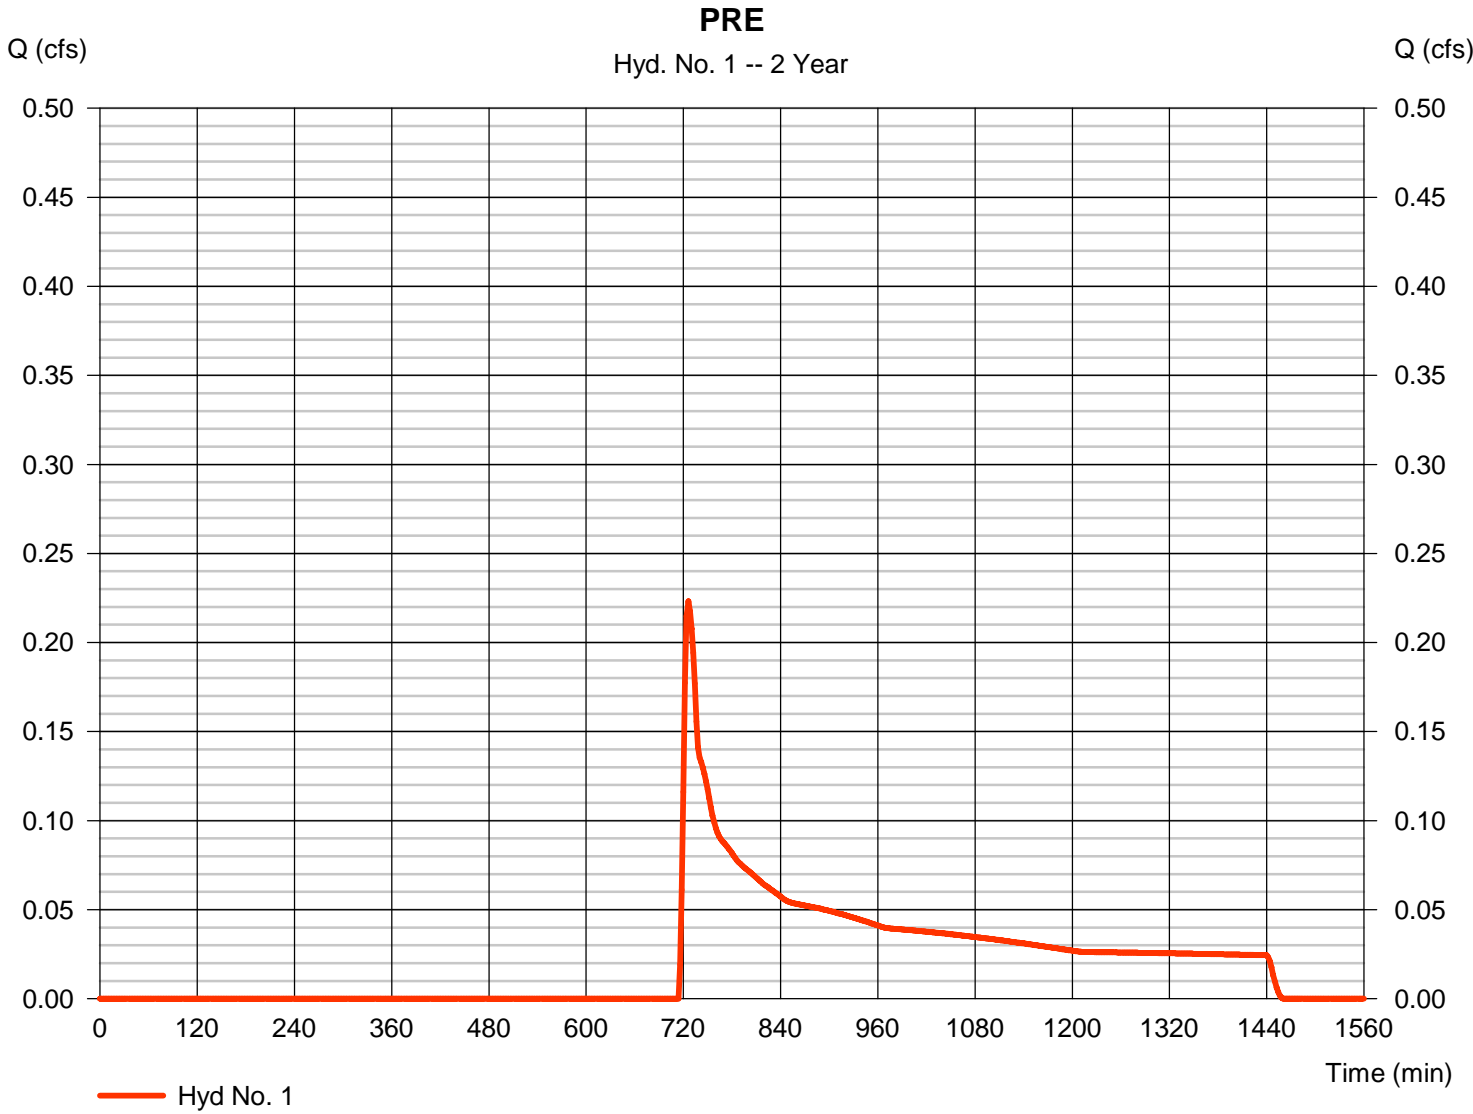

# TR55 Tc Worksheet

Hydraflow Hydrographs Extension for AutoCAD® Civil 3D® 2015 by Autodesk, Inc. v10.4

## Hyd. No. 1

PRE

<u>Description</u>	<u>A</u>	<u>B</u>	<u>C</u>	<u>Totals</u>
<b>Sheet Flow</b>				
Manning's n-value	= 0.240	0.011	0.011	
Flow length (ft)	= 50.0	0.0	0.0	
Two-year 24-hr precip. (in)	= 2.67	0.00	0.00	
Land slope (%)	= 2.50	0.00	0.00	
<b>Travel Time (min)</b>	<b>= 8.21</b>	<b>+ 0.00</b>	<b>+ 0.00</b>	<b>= 8.21</b>
<b>Shallow Concentrated Flow</b>				
Flow length (ft)	= 913.00	0.00	0.00	
Watercourse slope (%)	= 4.80	0.00	0.00	
Surface description	= Unpaved	Paved	Paved	
Average velocity (ft/s)	=3.53	0.00	0.00	
<b>Travel Time (min)</b>	<b>= 4.30</b>	<b>+ 0.00</b>	<b>+ 0.00</b>	<b>= 4.30</b>
<b>Channel Flow</b>				
X sectional flow area (sqft)	= 0.00	0.00	0.00	
Wetted perimeter (ft)	= 0.00	0.00	0.00	
Channel slope (%)	= 0.00	0.00	0.00	
Manning's n-value	= 0.015	0.015	0.015	
Velocity (ft/s)	=0.00	0.00	0.00	
Flow length (ft)	{{0}}0.0	0.0	0.0	
<b>Travel Time (min)</b>	<b>= 0.00</b>	<b>+ 0.00</b>	<b>+ 0.00</b>	<b>= 0.00</b>
<b>Total Travel Time, Tc .....</b>				<b>12.50 min</b>

# Hydrograph Report

Hydraflow Hydrographs Extension for AutoCAD® Civil 3D® 2015 by Autodesk, Inc. v10.4


Tuesday, 11 / 1 / 2016

## Hyd. No. 2

### POST UNDETAINED

Hydrograph type	= SCS Runoff	Peak discharge	= 0.129 cfs
Storm frequency	= 2 yrs	Time to peak	= 726 min
Time interval	= 2 min	Hyd. volume	= 1,125 cuft
Drainage area	= 1.710 ac	Curve number	= 58*
Basin Slope	= 0.0 %	Hydraulic length	= 0 ft
Tc method	= TR55	Time of conc. (Tc)	= 11.10 min
Total precip.	= 2.67 in	Distribution	= Type II
Storm duration	= 24 hrs	Shape factor	= 484

\* Composite (Area/CN) = [(1.700 x 58) + (0.010 x 85)] / 1.710

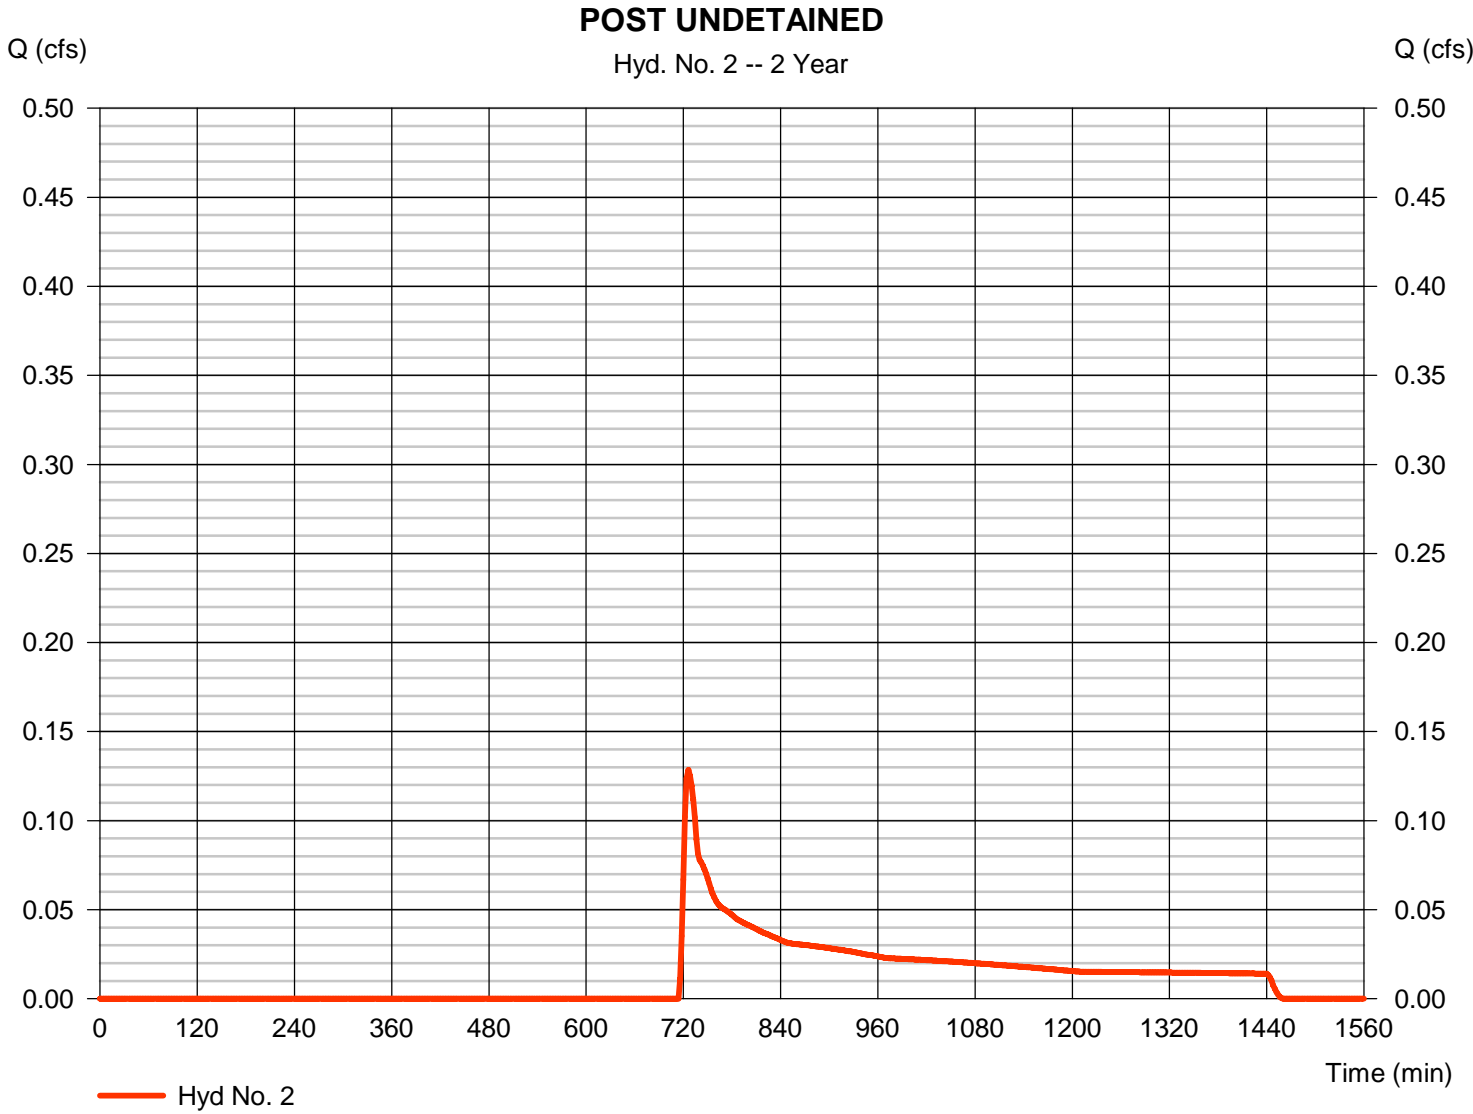

# TR55 Tc Worksheet

Hydraflow Hydrographs Extension for AutoCAD® Civil 3D® 2015 by Autodesk, Inc. v10.4

## Hyd. No. 2

POST UNDETAINED

<u>Description</u>	<u>A</u>	<u>B</u>	<u>C</u>	<u>Totals</u>
<b>Sheet Flow</b>				
Manning's n-value	= 0.240	0.011	0.011	
Flow length (ft)	= 50.0	0.0	0.0	
Two-year 24-hr precip. (in)	= 2.67	0.00	0.00	
Land slope (%)	= 4.00	0.00	0.00	
<b>Travel Time (min)</b>	<b>= 6.80</b>	<b>+</b> <b>0.00</b>	<b>+</b> <b>0.00</b>	<b>= 6.80</b>
<b>Shallow Concentrated Flow</b>				
Flow length (ft)	= 672.00	60.00	133.00	
Watercourse slope (%)	= 4.30	4.00	8.30	
Surface description	= Unpaved	Paved	Unpaved	
Average velocity (ft/s)	=3.35	4.07	4.65	
<b>Travel Time (min)</b>	<b>= 3.35</b>	<b>+</b> <b>0.25</b>	<b>+</b> <b>0.48</b>	<b>= 4.07</b>
<b>Channel Flow</b>				
X sectional flow area (sqft)	= 2.00	0.00	0.00	
Wetted perimeter (ft)	= 4.47	0.00	0.00	
Channel slope (%)	= 2.10	0.00	0.00	
Manning's n-value	= 0.015	0.015	0.015	
Velocity (ft/s)	=8.40	0.00	0.00	
Flow length (ft)	{{0}}96.0	0.0	0.0	
<b>Travel Time (min)</b>	<b>= 0.19</b>	<b>+</b> <b>0.00</b>	<b>+</b> <b>0.00</b>	<b>= 0.19</b>
<b>Total Travel Time, Tc .....</b>				<b>11.10 min</b>

# Hydrograph Report

Hydraflow Hydrographs Extension for AutoCAD® Civil 3D® 2015 by Autodesk, Inc. v10.4

Tuesday, 11 / 1 / 2016

## Hyd. No. 3


### POST DETAINED

Hydrograph type	= SCS Runoff	Peak discharge	= 0.223 cfs
Storm frequency	= 2 yrs	Time to peak	= 724 min
Time interval	= 2 min	Hyd. volume	= 1,172 cuft
Drainage area	= 1.260 ac	Curve number	= 61*
Basin Slope	= 0.0 %	Hydraulic length	= 0 ft
Tc method	= TR55	Time of conc. (Tc)	= 11.70 min
Total precip.	= 2.67 in	Distribution	= Type II
Storm duration	= 24 hrs	Shape factor	= 484

\* Composite (Area/CN) = [(0.137 x 85) + (1.123 x 58)] / 1.260

### POST DETAINED

Hyd. No. 3 -- 2 Year

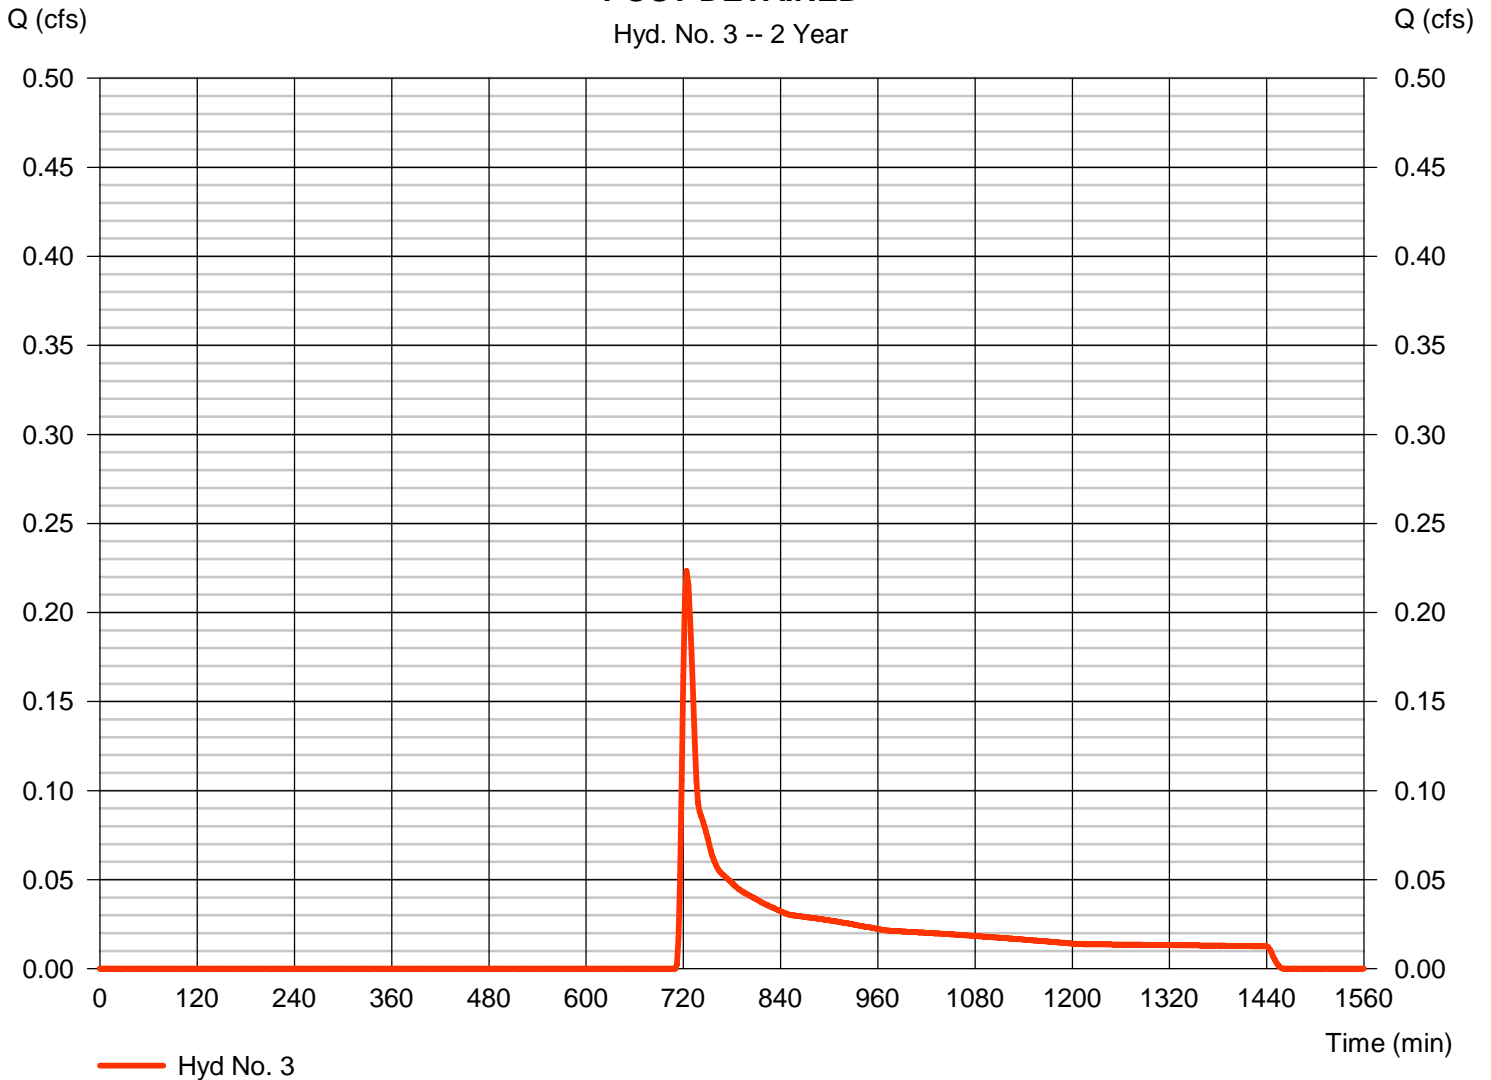



# TR55 Tc Worksheet

Hydraflow Hydrographs Extension for AutoCAD® Civil 3D® 2015 by Autodesk, Inc. v10.4

## Hyd. No. 3

POST DETAINED

<u>Description</u>	<u>A</u>	<u>B</u>	<u>C</u>	<u>Totals</u>
<b>Sheet Flow</b>				
Manning's n-value	= 0.240	0.011	0.011	
Flow length (ft)	= 50.0	0.0	0.0	
Two-year 24-hr precip. (in)	= 2.67	0.00	0.00	
Land slope (%)	= 2.50	0.00	0.00	
<b>Travel Time (min)</b>	<b>= 8.21</b>	<b>+ 0.00</b>	<b>+ 0.00</b>	<b>= 8.21</b>
<b>Shallow Concentrated Flow</b>				
Flow length (ft)	= 782.00	0.00	0.00	
Watercourse slope (%)	= 5.20	0.00	0.00	
Surface description	= Unpaved	Paved	Paved	
Average velocity (ft/s)	=3.68	0.00	0.00	
<b>Travel Time (min)</b>	<b>= 3.54</b>	<b>+ 0.00</b>	<b>+ 0.00</b>	<b>= 3.54</b>
<b>Channel Flow</b>				
X sectional flow area (sqft)	= 0.00	0.00	0.00	
Wetted perimeter (ft)	= 0.00	0.00	0.00	
Channel slope (%)	= 0.00	0.00	0.00	
Manning's n-value	= 0.015	0.015	0.015	
Velocity (ft/s)	=0.00	0.00	0.00	
Flow length (ft)	0.0	0.0	0.0	
<b>Travel Time (min)</b>	<b>= 0.00</b>	<b>+ 0.00</b>	<b>+ 0.00</b>	<b>= 0.00</b>
<b>Total Travel Time, Tc .....</b>				<b>11.70 min</b>

# Hydrograph Report


Hydraflow Hydrographs Extension for AutoCAD® Civil 3D® 2015 by Autodesk, Inc. v10.4

Tuesday, 11 / 1 / 2016

## Hyd. No. 4

### VOLUME ABSTRACTION

Hydrograph type	= Diversion1	Peak discharge	= 0.223 cfs
Storm frequency	= 2 yrs	Time to peak	= 724 min
Time interval	= 2 min	Hyd. volume	= 1,172 cuft
Inflow hydrograph	= 3 - POST DETAINED	2nd diverted hyd.	= 5
Diversion method	= First Flush Volume	Volume Up To	= 2,700 cuft

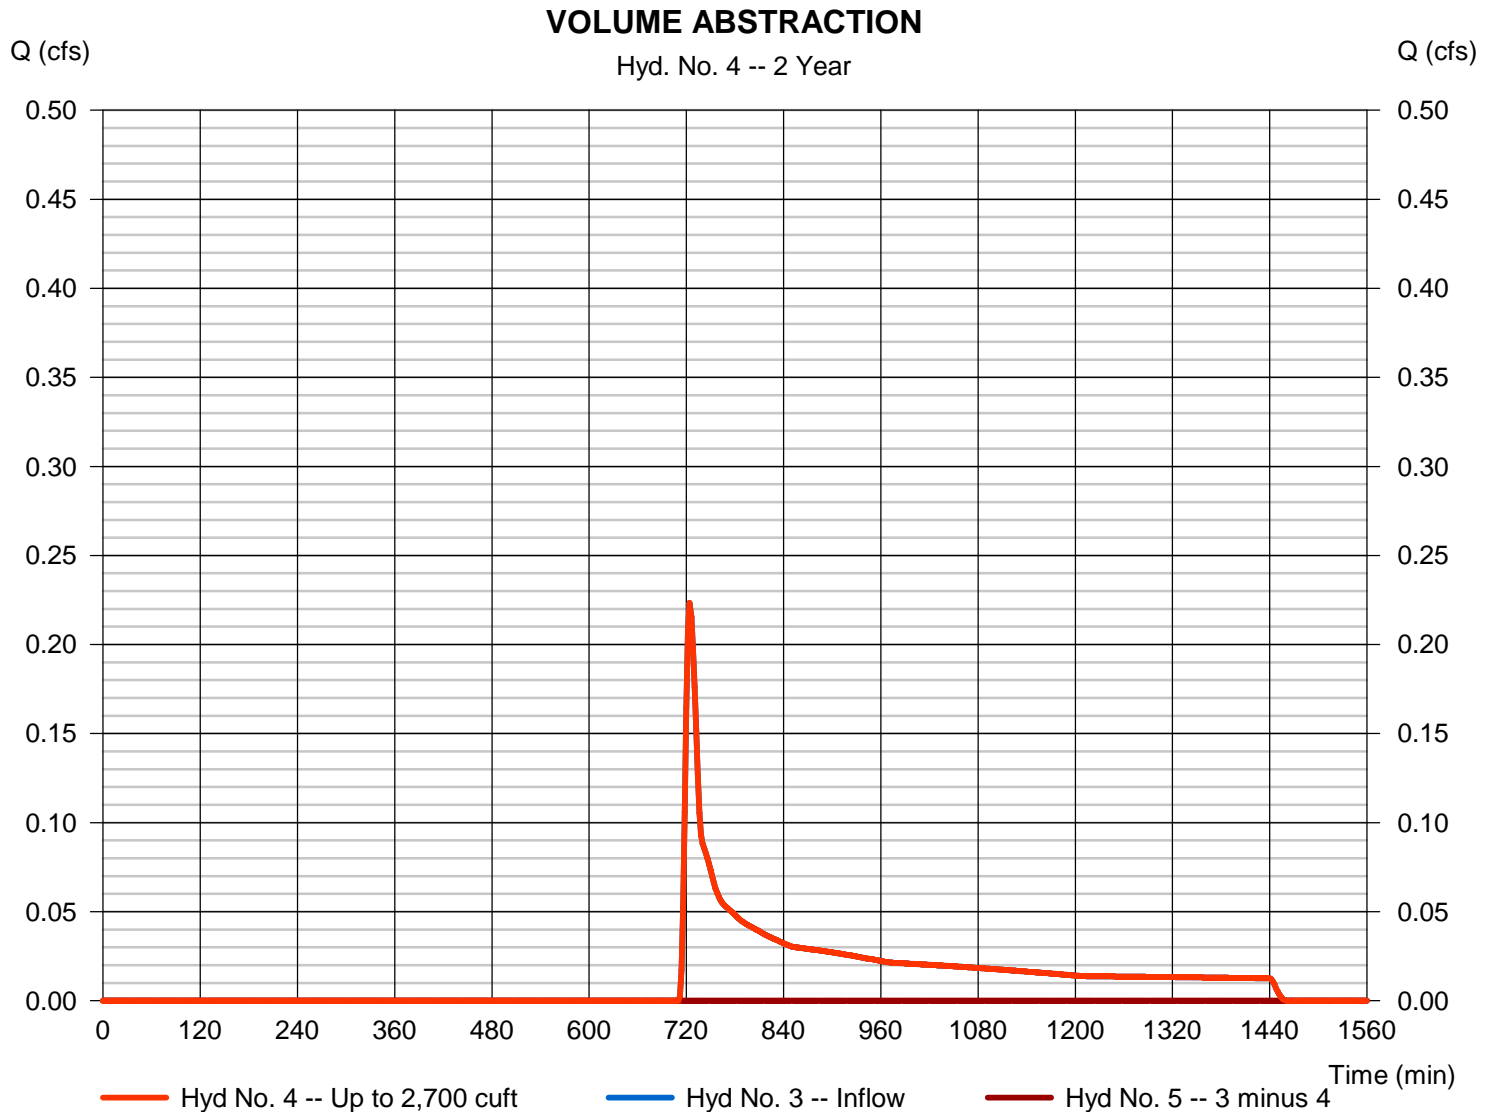


# Hydrograph Report

## Hyd. No. 5

### POST AFTER BMP

Hydrograph type	= Diversion2	Peak discharge	= 0.000 cfs
Storm frequency	= 2 yrs	Time to peak	= n/a
Time interval	= 2 min	Hyd. volume	= 0 cuft
Inflow hydrograph	= 3 - POST DETAINED	2nd diverted hyd.	= 4
Diversion method	= First Flush Volume	Volume Up To	= 2,700 cuft

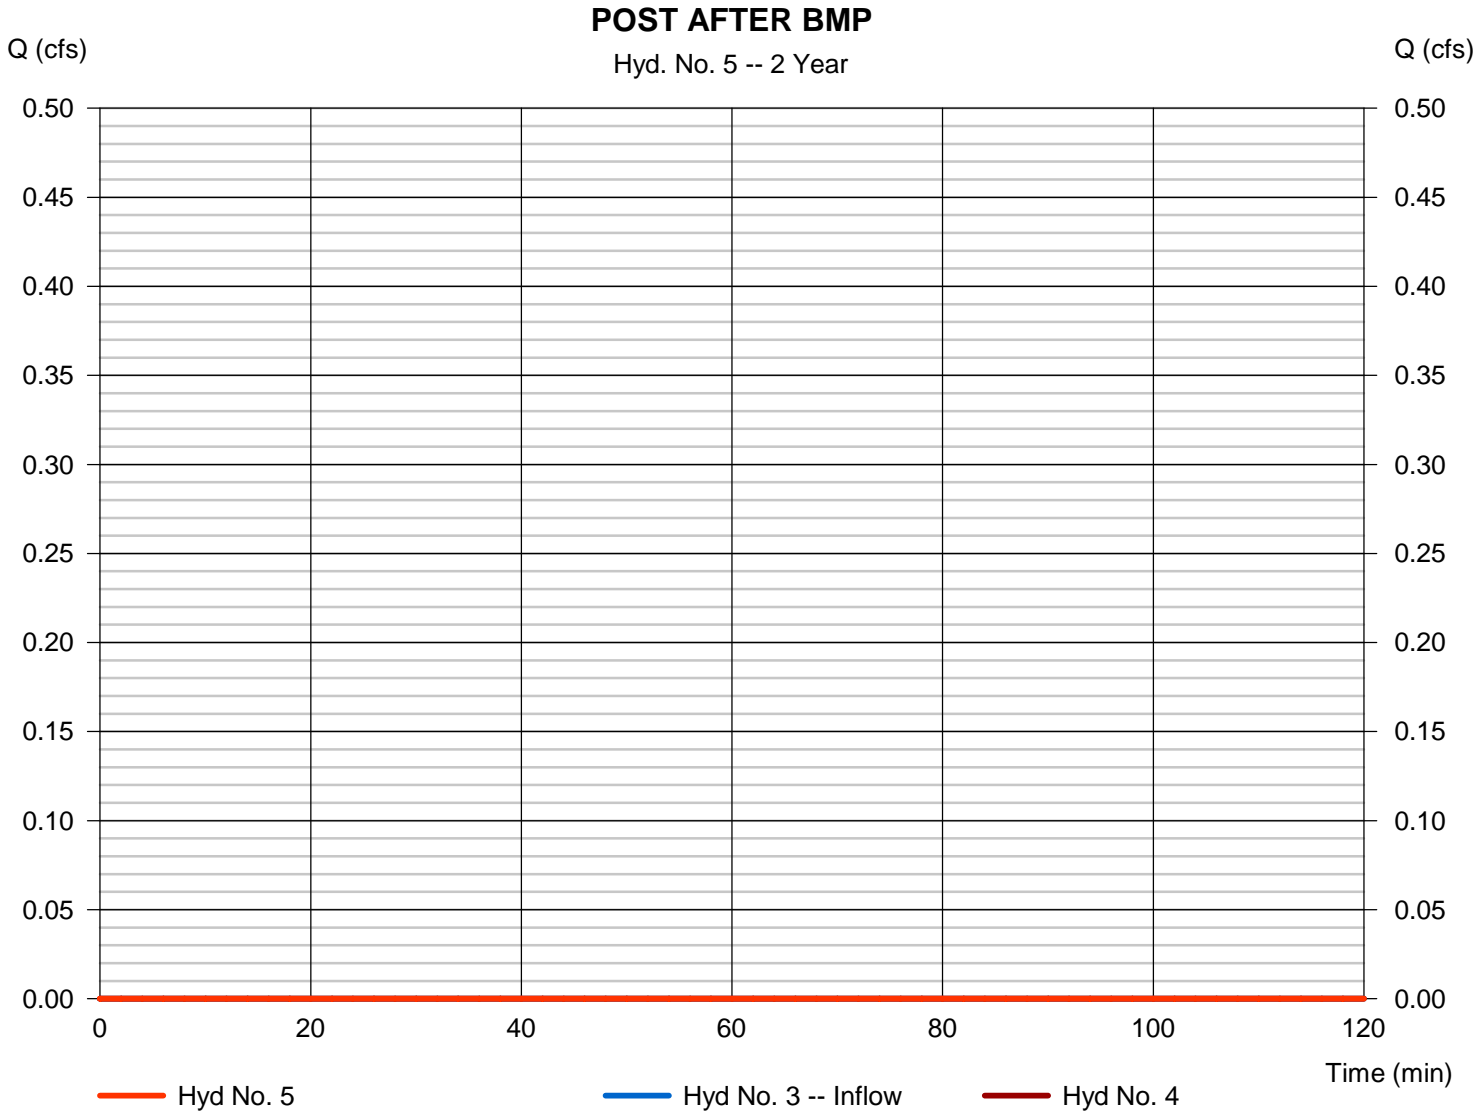

# Hydrograph Report

Hydraflow Hydrographs Extension for AutoCAD® Civil 3D® 2015 by Autodesk, Inc. v10.4


Tuesday, 11 / 1 / 2016

## Hyd. No. 6

POST AT POI

Hydrograph type = Combine  
Storm frequency = 2 yrs  
Time interval = 2 min  
Inflow hyds. = 2, 5

Peak discharge = 0.129 cfs  
Time to peak = 726 min  
Hyd. volume = 1,125 cuft  
Contrib. drain. area = 1.710 ac

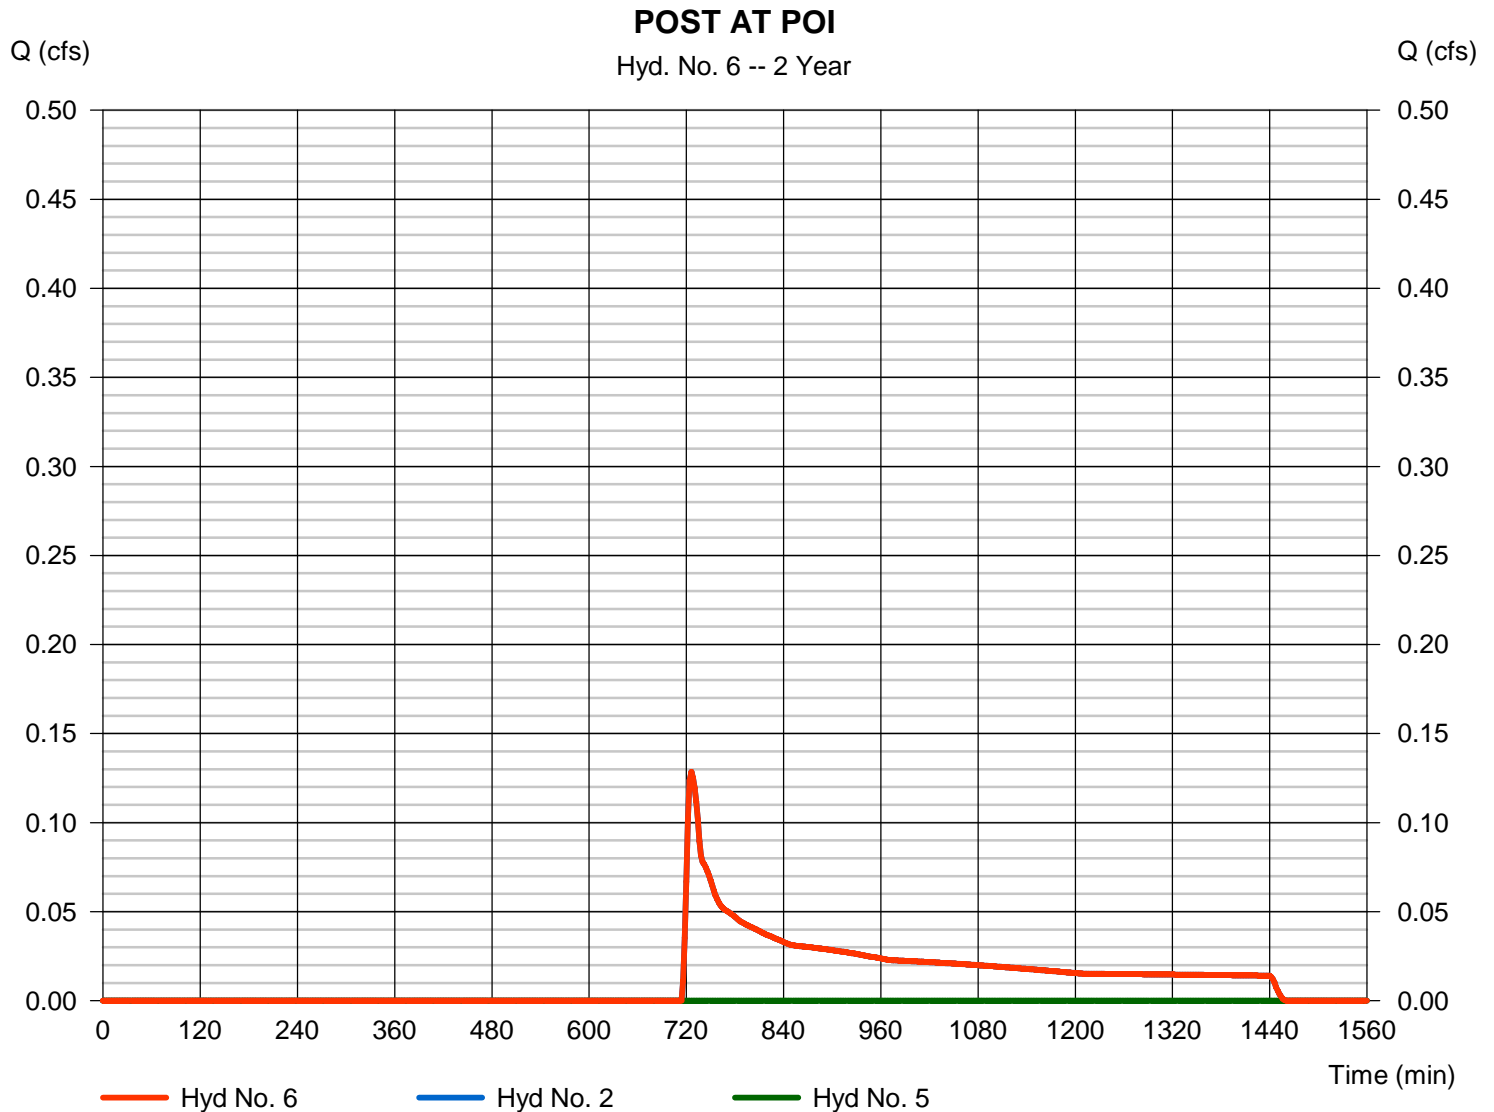

# Hydrograph Summary Report

Hydraflow Hydrographs Extension for AutoCAD® Civil 3D® 2015 by Autodesk, Inc. v10.4

Hyd. No.	Hydrograph type (origin)	Peak flow (cfs)	Time interval (min)	Time to Peak (min)	Hyd. volume (cuft)	Inflow hyd(s)	Maximum elevation (ft)	Total strge used (cuft)	Hydrograph Description	
1	SCS Runoff	1.984	2	722	6,748	-----	-----	-----	PRE	
2	SCS Runoff	1.142	2	722	3,885	-----	-----	-----	POST UNDETAINED	
3	SCS Runoff	1.157	2	722	3,525	-----	-----	-----	POST DETAINED	
4	Diversion1	1.157	2	722	2,702	3	-----	-----	VOLUME ABSTRACTION	
5	Diversion2	0.046	2	1038	823	3	-----	-----	POST AFTER BMP	
6	Combine	1.142	2	722	4,708	2, 5	-----	-----	POST AT POI	
High Street.gpw					Return Period: 10 Year			Tuesday, 11 / 1 / 2016		

# Hydrograph Report

Hydraflow Hydrographs Extension for AutoCAD® Civil 3D® 2015 by Autodesk, Inc. v10.4


Tuesday, 11 / 1 / 2016

## Hyd. No. 1

PRE

Hydrograph type	= SCS Runoff	Peak discharge	= 1.984 cfs
Storm frequency	= 10 yrs	Time to peak	= 722 min
Time interval	= 2 min	Hyd. volume	= 6,748 cuft
Drainage area	= 2.970 ac	Curve number	= 58*
Basin Slope	= 0.0 %	Hydraulic length	= 0 ft
Tc method	= TR55	Time of conc. (Tc)	= 12.50 min
Total precip.	= 3.87 in	Distribution	= Type II
Storm duration	= 24 hrs	Shape factor	= 484

\* Composite (Area/CN) = [(2.966 x 58)] / 2.970

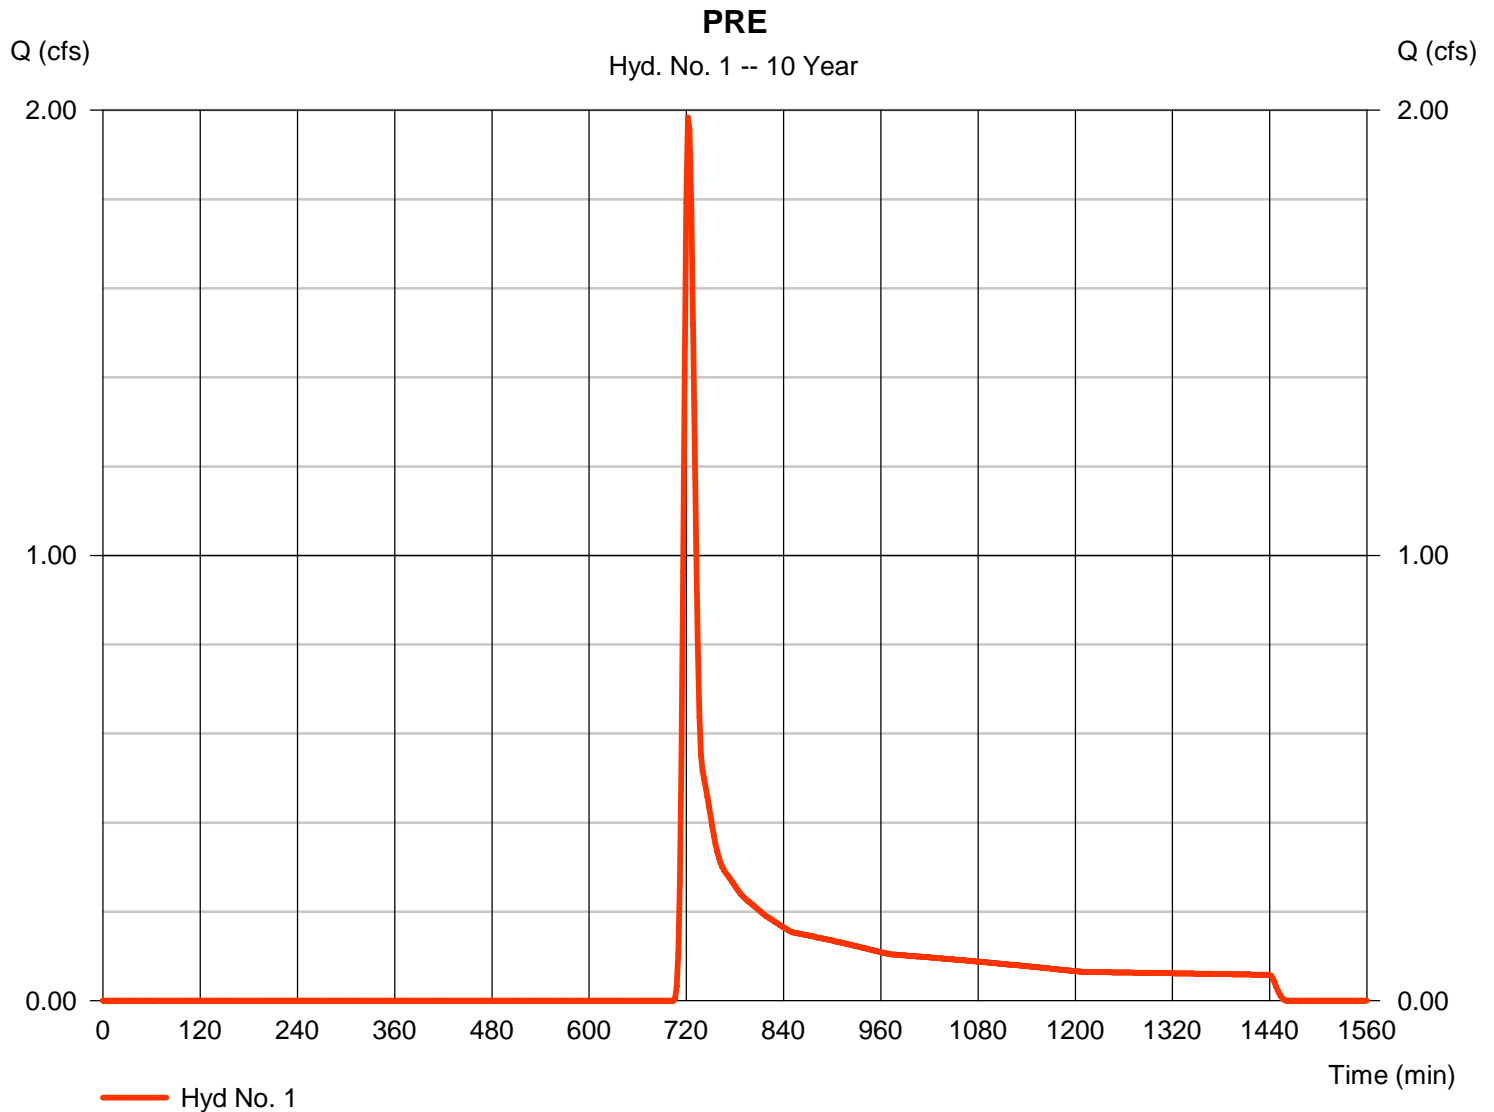

# Hydrograph Report

Hydraflow Hydrographs Extension for AutoCAD® Civil 3D® 2015 by Autodesk, Inc. v10.4


Tuesday, 11 / 1 / 2016

## Hyd. No. 2

### POST UNDETAINED

Hydrograph type	= SCS Runoff	Peak discharge	= 1.142 cfs
Storm frequency	= 10 yrs	Time to peak	= 722 min
Time interval	= 2 min	Hyd. volume	= 3,885 cuft
Drainage area	= 1.710 ac	Curve number	= 58*
Basin Slope	= 0.0 %	Hydraulic length	= 0 ft
Tc method	= TR55	Time of conc. (Tc)	= 11.10 min
Total precip.	= 3.87 in	Distribution	= Type II
Storm duration	= 24 hrs	Shape factor	= 484

\* Composite (Area/CN) = [(1.700 x 58) + (0.010 x 85)] / 1.710

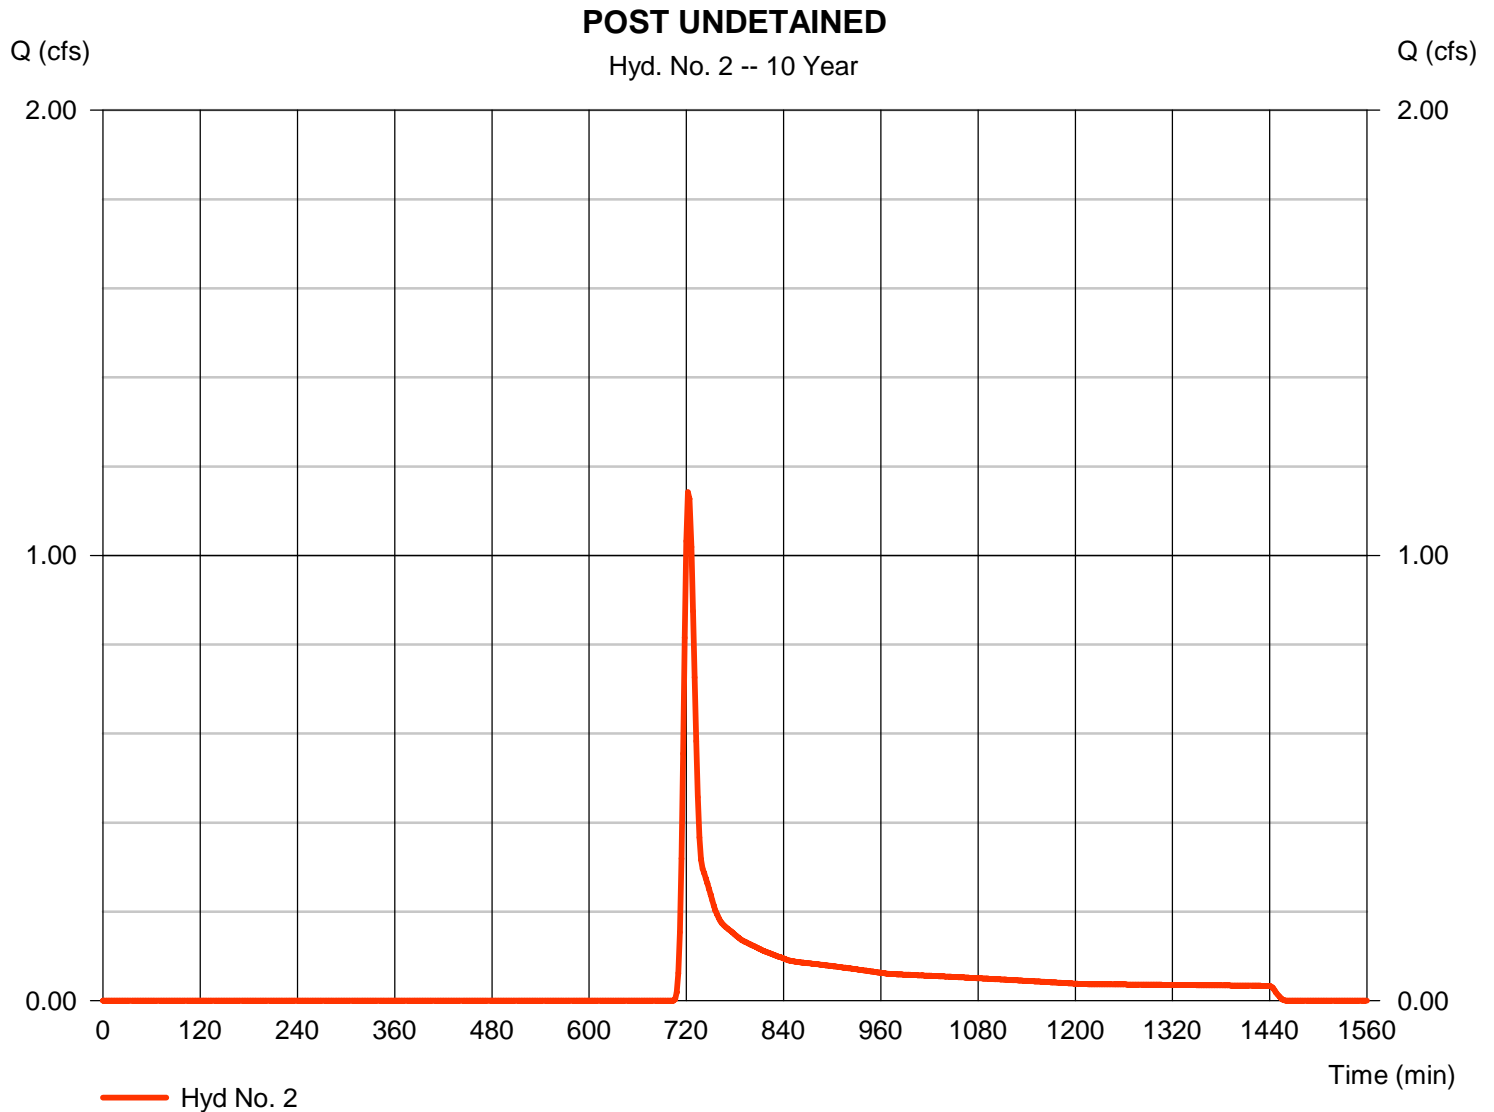



# Hydrograph Report

Hydraflow Hydrographs Extension for AutoCAD® Civil 3D® 2015 by Autodesk, Inc. v10.4


Tuesday, 11 / 1 / 2016

## Hyd. No. 3

### POST DETAINED

Hydrograph type	= SCS Runoff	Peak discharge	= 1.157 cfs
Storm frequency	= 10 yrs	Time to peak	= 722 min
Time interval	= 2 min	Hyd. volume	= 3,525 cuft
Drainage area	= 1.260 ac	Curve number	= 61*
Basin Slope	= 0.0 %	Hydraulic length	= 0 ft
Tc method	= TR55	Time of conc. (Tc)	= 11.70 min
Total precip.	= 3.87 in	Distribution	= Type II
Storm duration	= 24 hrs	Shape factor	= 484

\* Composite (Area/CN) = [(0.137 x 85) + (1.123 x 58)] / 1.260

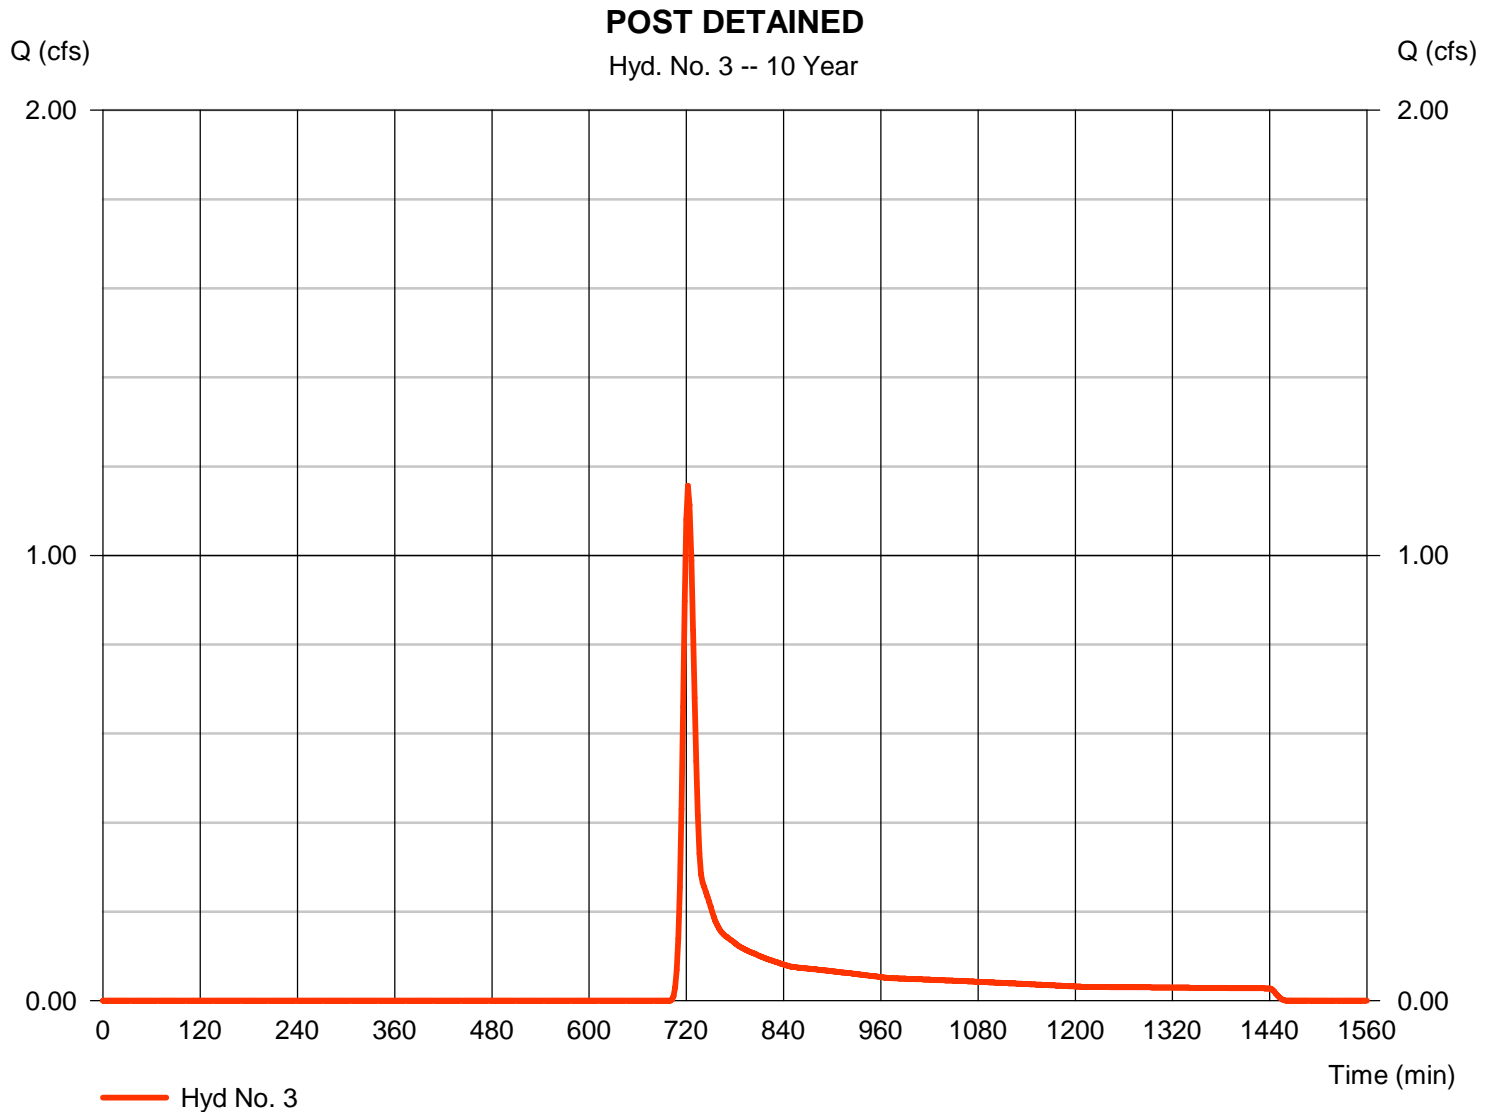

# Hydrograph Report


Hydraflow Hydrographs Extension for AutoCAD® Civil 3D® 2015 by Autodesk, Inc. v10.4

Tuesday, 11 / 1 / 2016

## Hyd. No. 4

### VOLUME ABSTRACTION

Hydrograph type	= Diversion1	Peak discharge	= 1.157 cfs
Storm frequency	= 10 yrs	Time to peak	= 722 min
Time interval	= 2 min	Hyd. volume	= 2,702 cuft
Inflow hydrograph	= 3 - POST DETAINED	2nd diverted hyd.	= 5
Diversion method	= First Flush Volume	Volume Up To	= 2,700 cuft

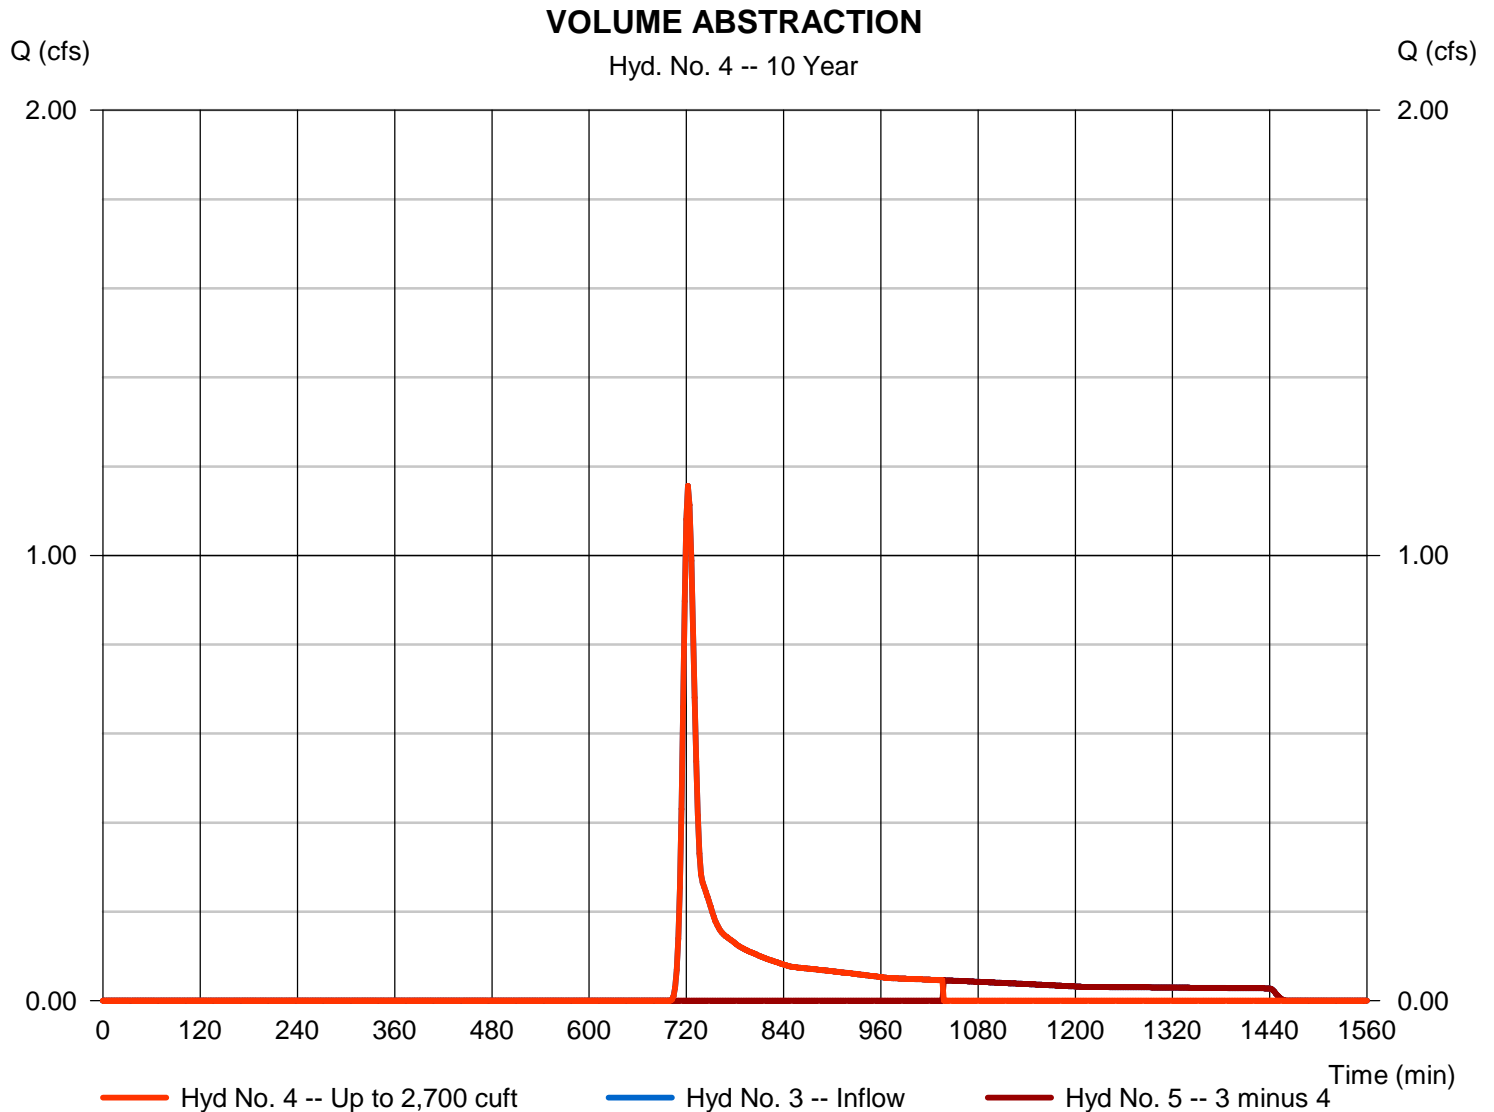

# Hydrograph Report


Hydraflow Hydrographs Extension for AutoCAD® Civil 3D® 2015 by Autodesk, Inc. v10.4

Tuesday, 11 / 1 / 2016

## Hyd. No. 5

POST AFTER BMP

Hydrograph type	= Diversion2	Peak discharge	= 0.046 cfs
Storm frequency	= 10 yrs	Time to peak	= 1038 min
Time interval	= 2 min	Hyd. volume	= 823 cuft
Inflow hydrograph	= 3 - POST DETAINED	2nd diverted hyd.	= 4
Diversion method	= First Flush Volume	Volume Up To	= 2,700 cuft

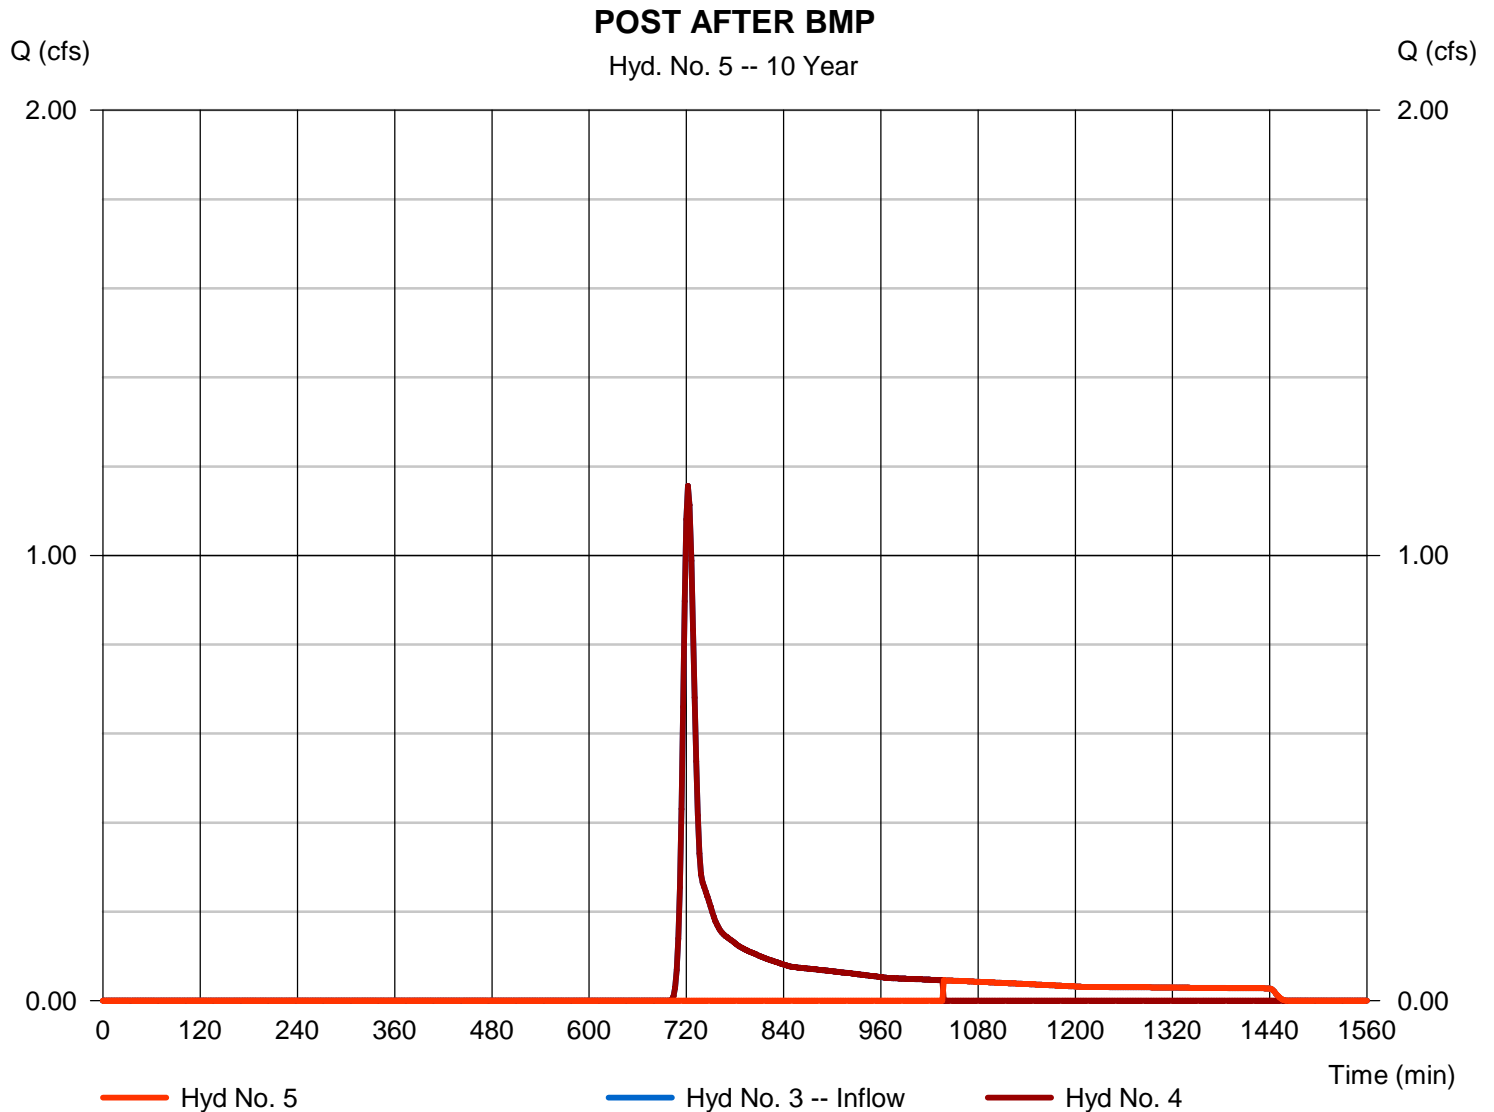

# Hydrograph Report

Hydraflow Hydrographs Extension for AutoCAD® Civil 3D® 2015 by Autodesk, Inc. v10.4


Tuesday, 11 / 1 / 2016

## Hyd. No. 6

POST AT POI

Hydrograph type = Combine  
 Storm frequency = 10 yrs  
 Time interval = 2 min  
 Inflow hyds. = 2, 5

Peak discharge = 1.142 cfs  
 Time to peak = 722 min  
 Hyd. volume = 4,708 cuft  
 Contrib. drain. area = 1.710 ac

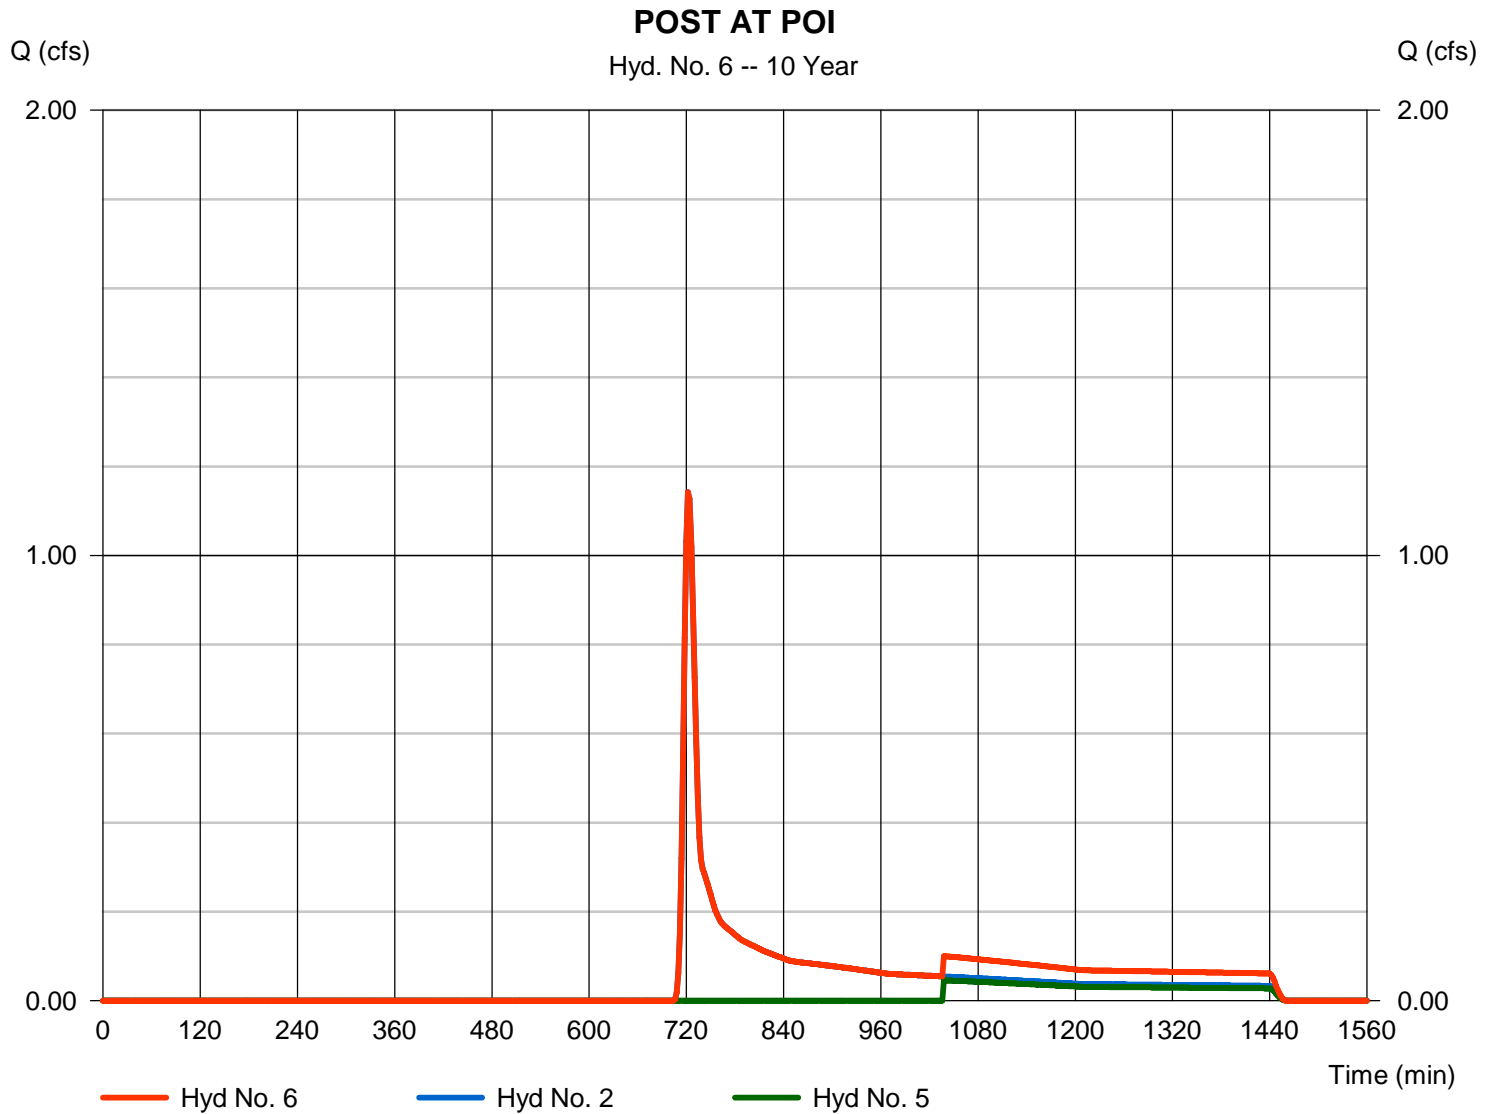

# Hydrograph Summary Report

Hydraflow Hydrographs Extension for AutoCAD® Civil 3D® 2015 by Autodesk, Inc. v10.4

Hyd. No.	Hydrograph type (origin)	Peak flow (cfs)	Time interval (min)	Time to Peak (min)	Hyd. volume (cuft)	Inflow hyd(s)	Maximum elevation (ft)	Total strge used (cuft)	Hydrograph Description
1	SCS Runoff	5.319	2	722	14,869	-----	-----	-----	PRE
2	SCS Runoff	3.063	2	722	8,561	-----	-----	-----	POST UNDETAINED
3	SCS Runoff	2.700	2	722	7,324	-----	-----	-----	POST DETAINED
4	Diversion1	2.700	2	722	2,827	3	-----	-----	VOLUME ABSTRACTION
5	Diversion2	0.842	2	734	4,497	3	-----	-----	POST AFTER BMP
6	Combine	3.063	2	722	13,058	2, 5	-----	-----	POST AT POI
High Street.gpw					Return Period: 50 Year			Tuesday, 11 / 1 / 2016	

# Hydrograph Report

Hydraflow Hydrographs Extension for AutoCAD® Civil 3D® 2015 by Autodesk, Inc. v10.4


Tuesday, 11 / 1 / 2016

## Hyd. No. 1

PRE

Hydrograph type	= SCS Runoff	Peak discharge	= 5.319 cfs
Storm frequency	= 50 yrs	Time to peak	= 722 min
Time interval	= 2 min	Hyd. volume	= 14,869 cuft
Drainage area	= 2.970 ac	Curve number	= 58*
Basin Slope	= 0.0 %	Hydraulic length	= 0 ft
Tc method	= TR55	Time of conc. (Tc)	= 12.50 min
Total precip.	= 5.30 in	Distribution	= Type II
Storm duration	= 24 hrs	Shape factor	= 484

\* Composite (Area/CN) = [(2.966 x 58)] / 2.970

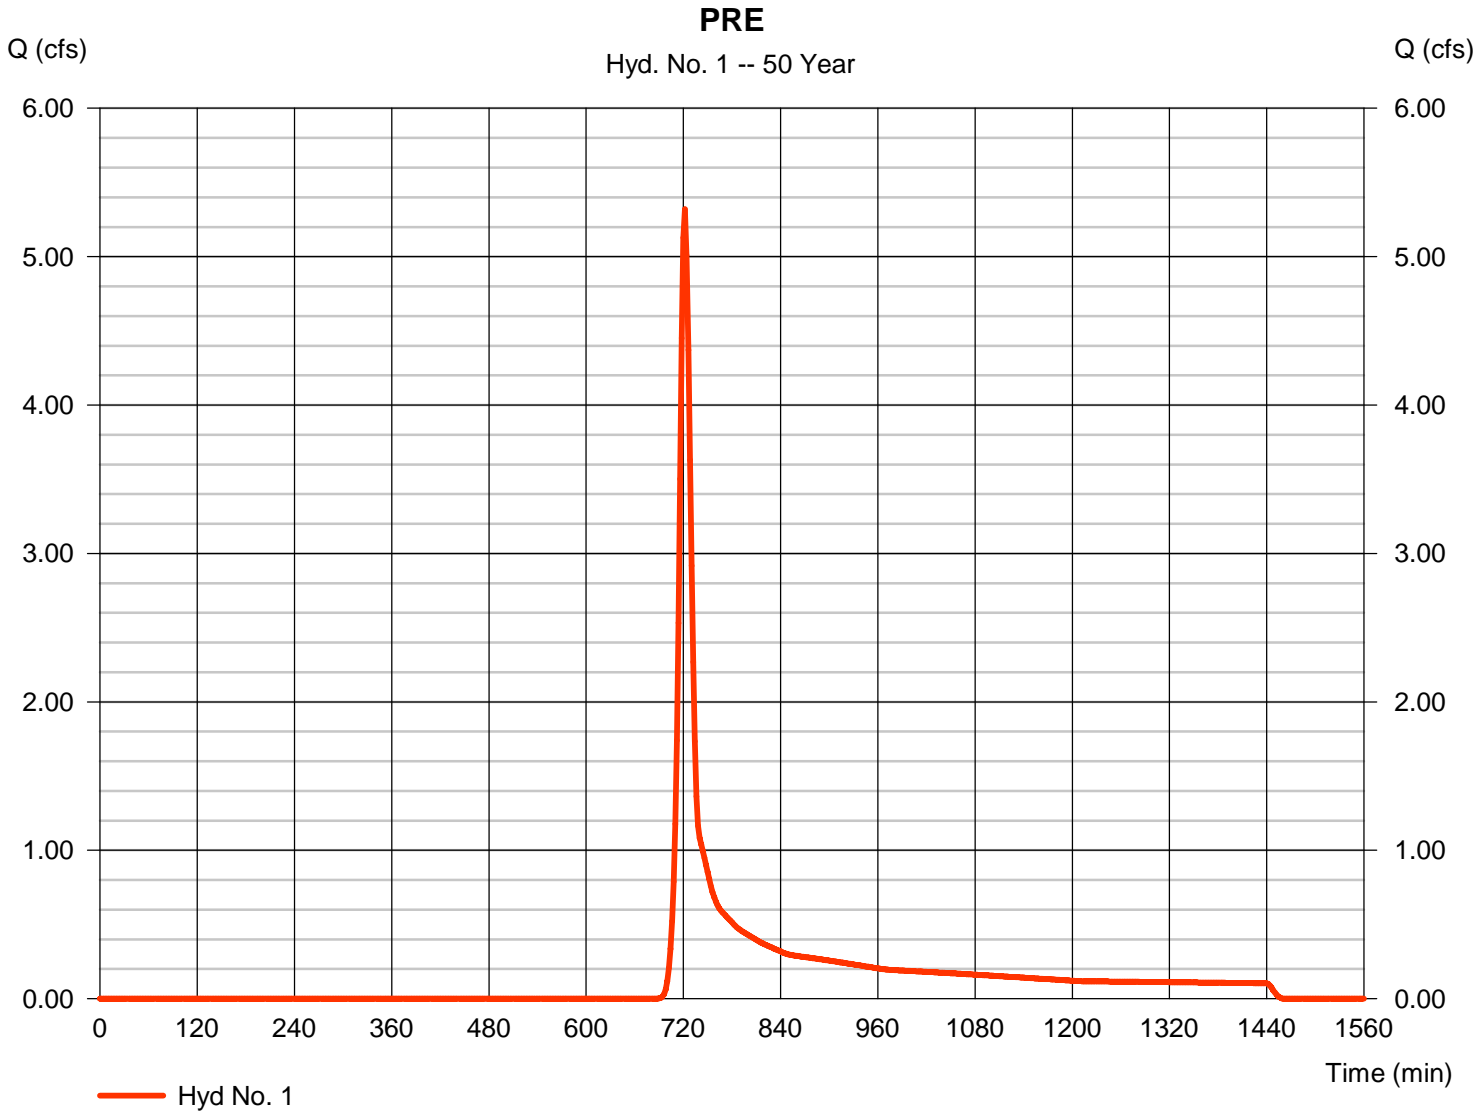


# Hydrograph Report

## Hyd. No. 2

### POST UNDETAINED

Hydrograph type	= SCS Runoff	Peak discharge	= 3.063 cfs
Storm frequency	= 50 yrs	Time to peak	= 722 min
Time interval	= 2 min	Hyd. volume	= 8,561 cuft
Drainage area	= 1.710 ac	Curve number	= 58*
Basin Slope	= 0.0 %	Hydraulic length	= 0 ft
Tc method	= TR55	Time of conc. (Tc)	= 11.10 min
Total precip.	= 5.30 in	Distribution	= Type II
Storm duration	= 24 hrs	Shape factor	= 484

\* Composite (Area/CN) = [(1.700 x 58) + (0.010 x 85)] / 1.710

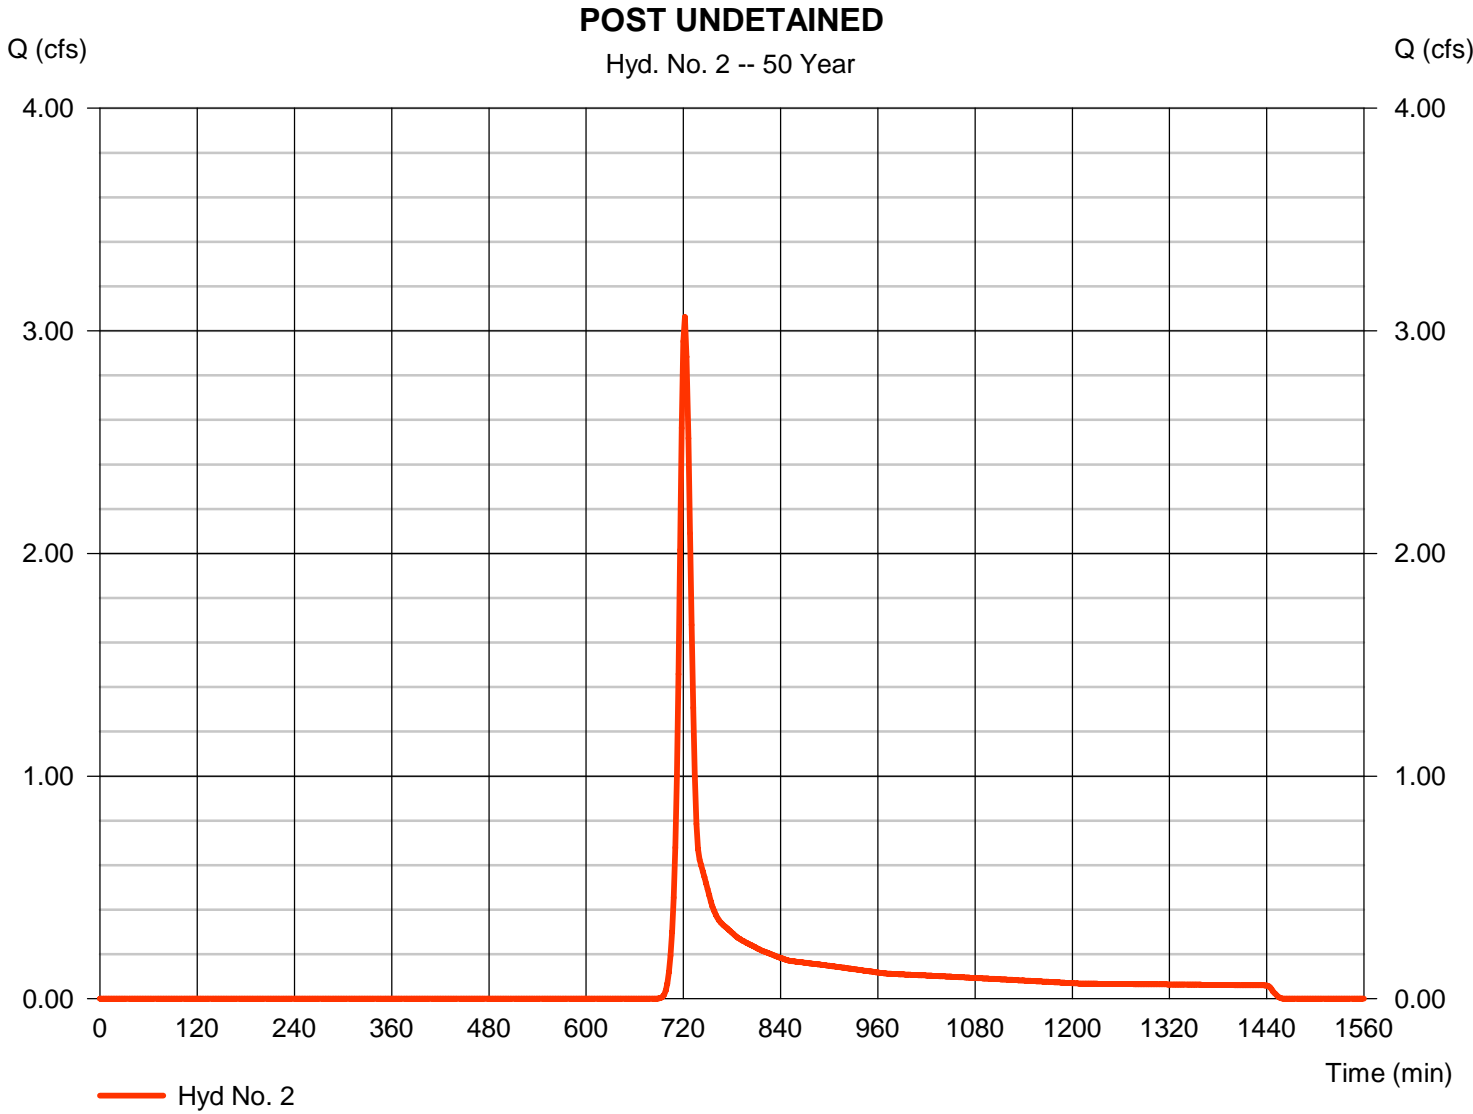




# Hydrograph Report

## Hyd. No. 3

### POST DETAINED

Hydrograph type	= SCS Runoff	Peak discharge	= 2.700 cfs
Storm frequency	= 50 yrs	Time to peak	= 722 min
Time interval	= 2 min	Hyd. volume	= 7,324 cuft
Drainage area	= 1.260 ac	Curve number	= 61*
Basin Slope	= 0.0 %	Hydraulic length	= 0 ft
Tc method	= TR55	Time of conc. (Tc)	= 11.70 min
Total precip.	= 5.30 in	Distribution	= Type II
Storm duration	= 24 hrs	Shape factor	= 484

\* Composite (Area/CN) = [(0.137 x 85) + (1.123 x 58)] / 1.260

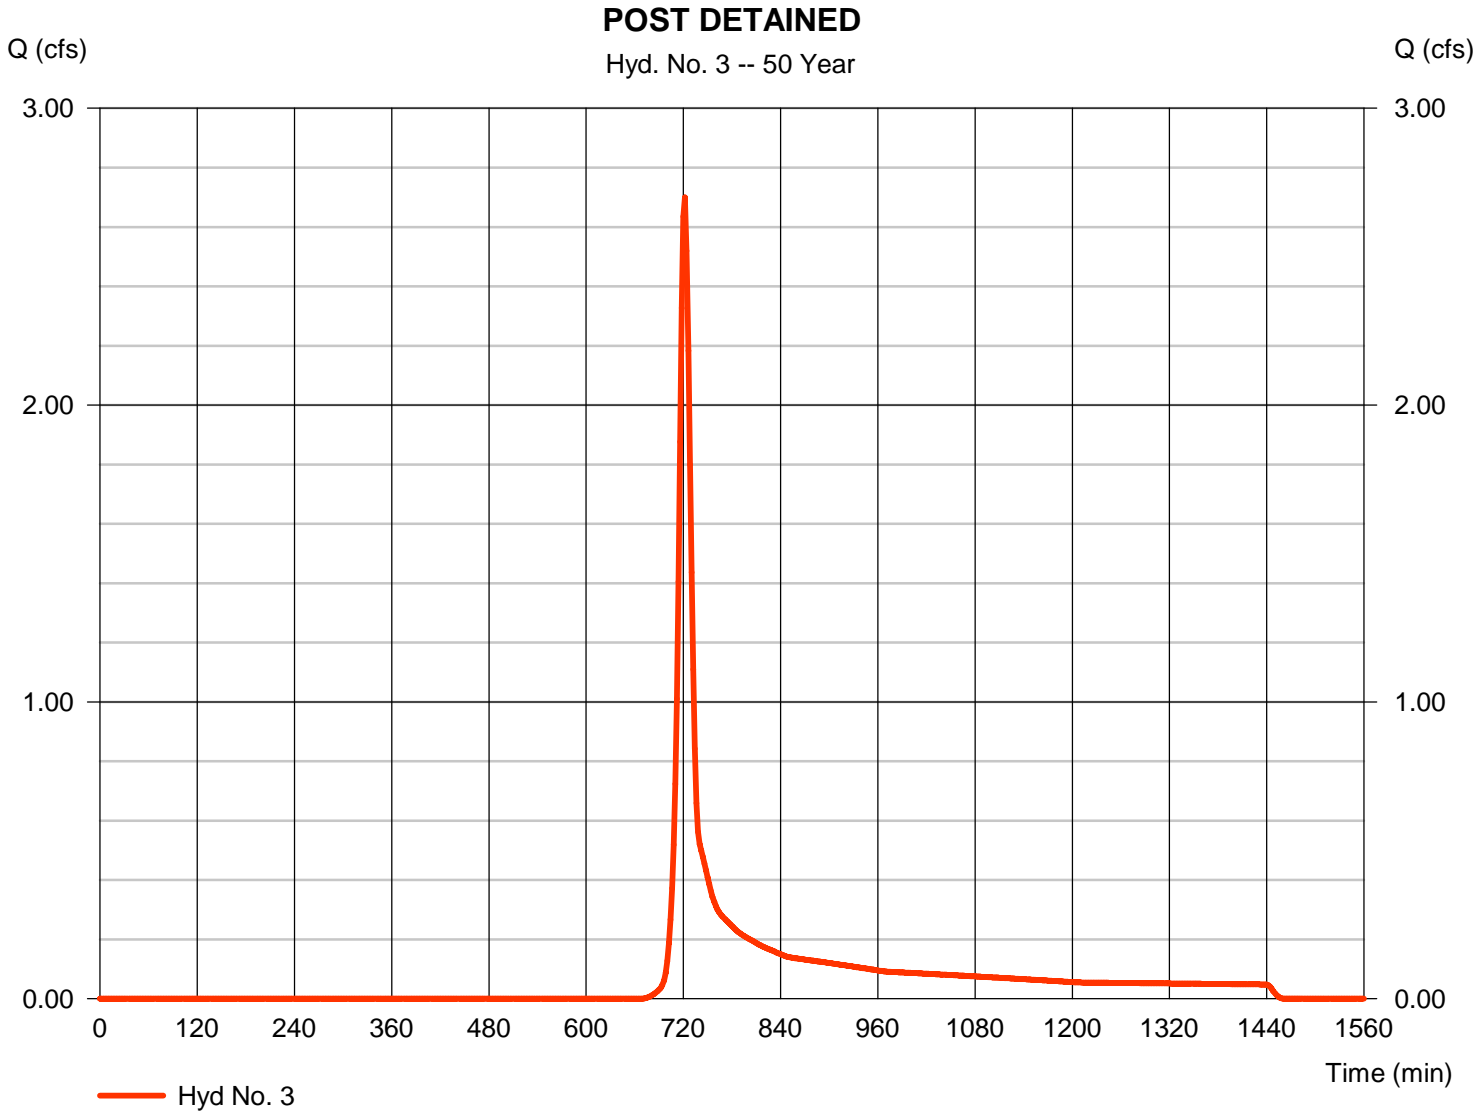

# Hydrograph Report


Hydraflow Hydrographs Extension for AutoCAD® Civil 3D® 2015 by Autodesk, Inc. v10.4

Tuesday, 11 / 1 / 2016

## Hyd. No. 4

### VOLUME ABSTRACTION

Hydrograph type	= Diversion1	Peak discharge	= 2.700 cfs
Storm frequency	= 50 yrs	Time to peak	= 722 min
Time interval	= 2 min	Hyd. volume	= 2,827 cuft
Inflow hydrograph	= 3 - POST DETAINED	2nd diverted hyd.	= 5
Diversion method	= First Flush Volume	Volume Up To	= 2,700 cuft

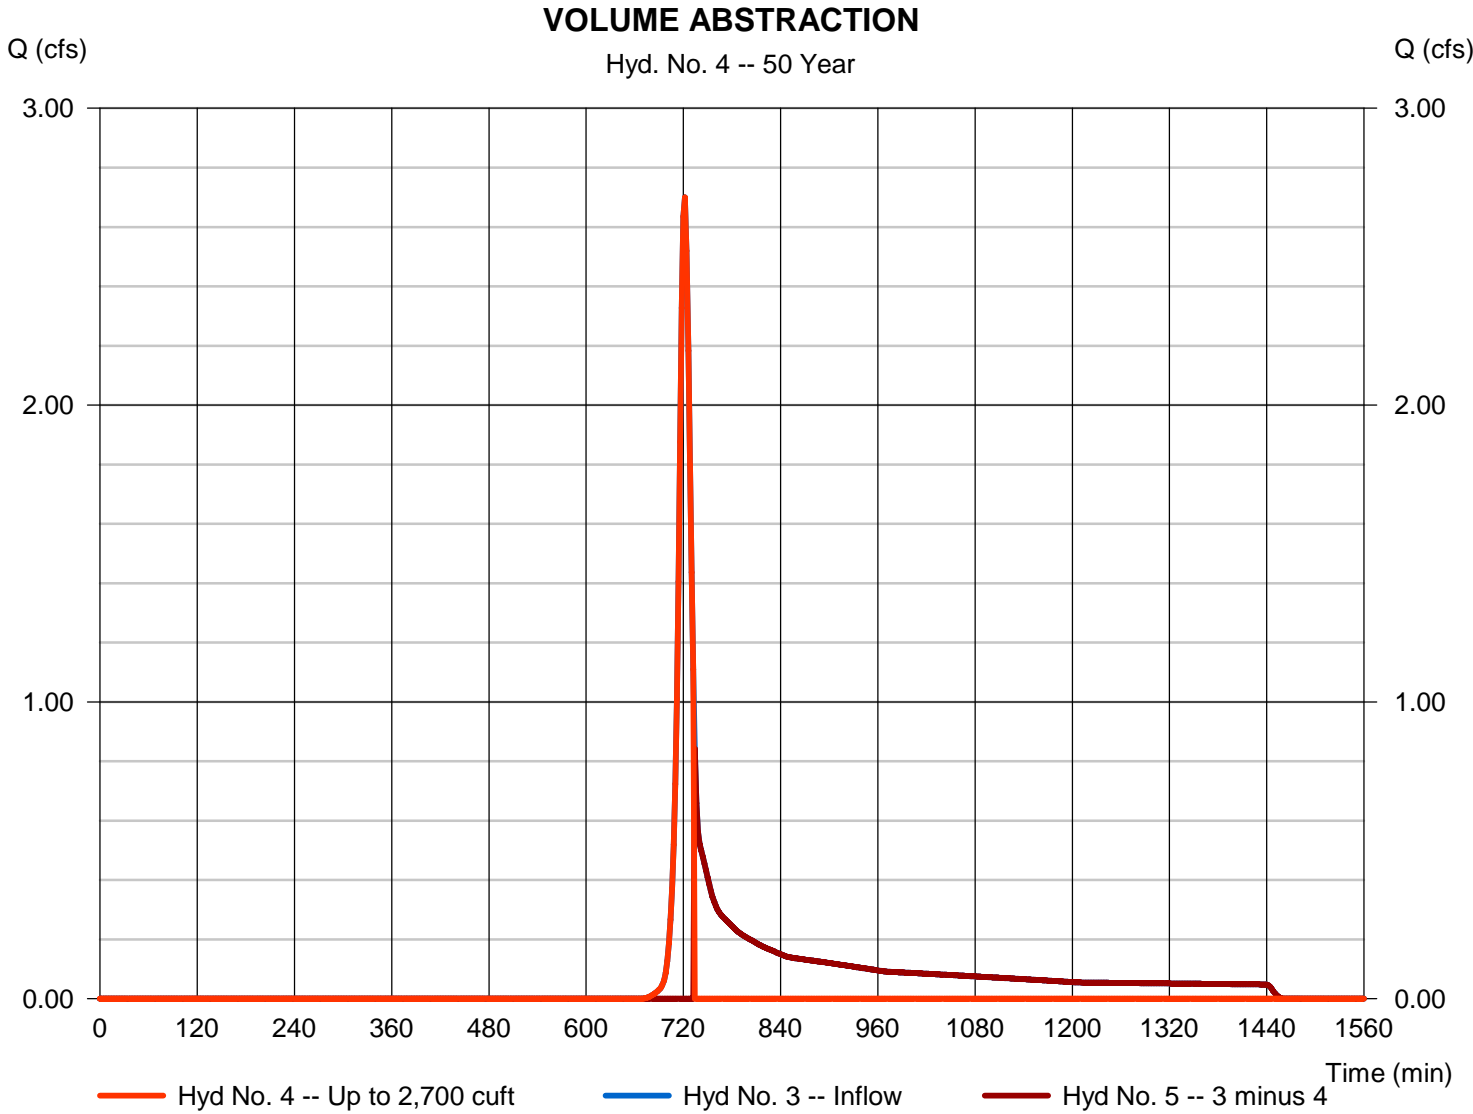

# Hydrograph Report


Hydraflow Hydrographs Extension for AutoCAD® Civil 3D® 2015 by Autodesk, Inc. v10.4

Tuesday, 11 / 1 / 2016

## Hyd. No. 5

POST AFTER BMP

Hydrograph type	= Diversion2	Peak discharge	= 0.842 cfs
Storm frequency	= 50 yrs	Time to peak	= 734 min
Time interval	= 2 min	Hyd. volume	= 4,497 cuft
Inflow hydrograph	= 3 - POST DETAINED	2nd diverted hyd.	= 4
Diversion method	= First Flush Volume	Volume Up To	= 2,700 cuft

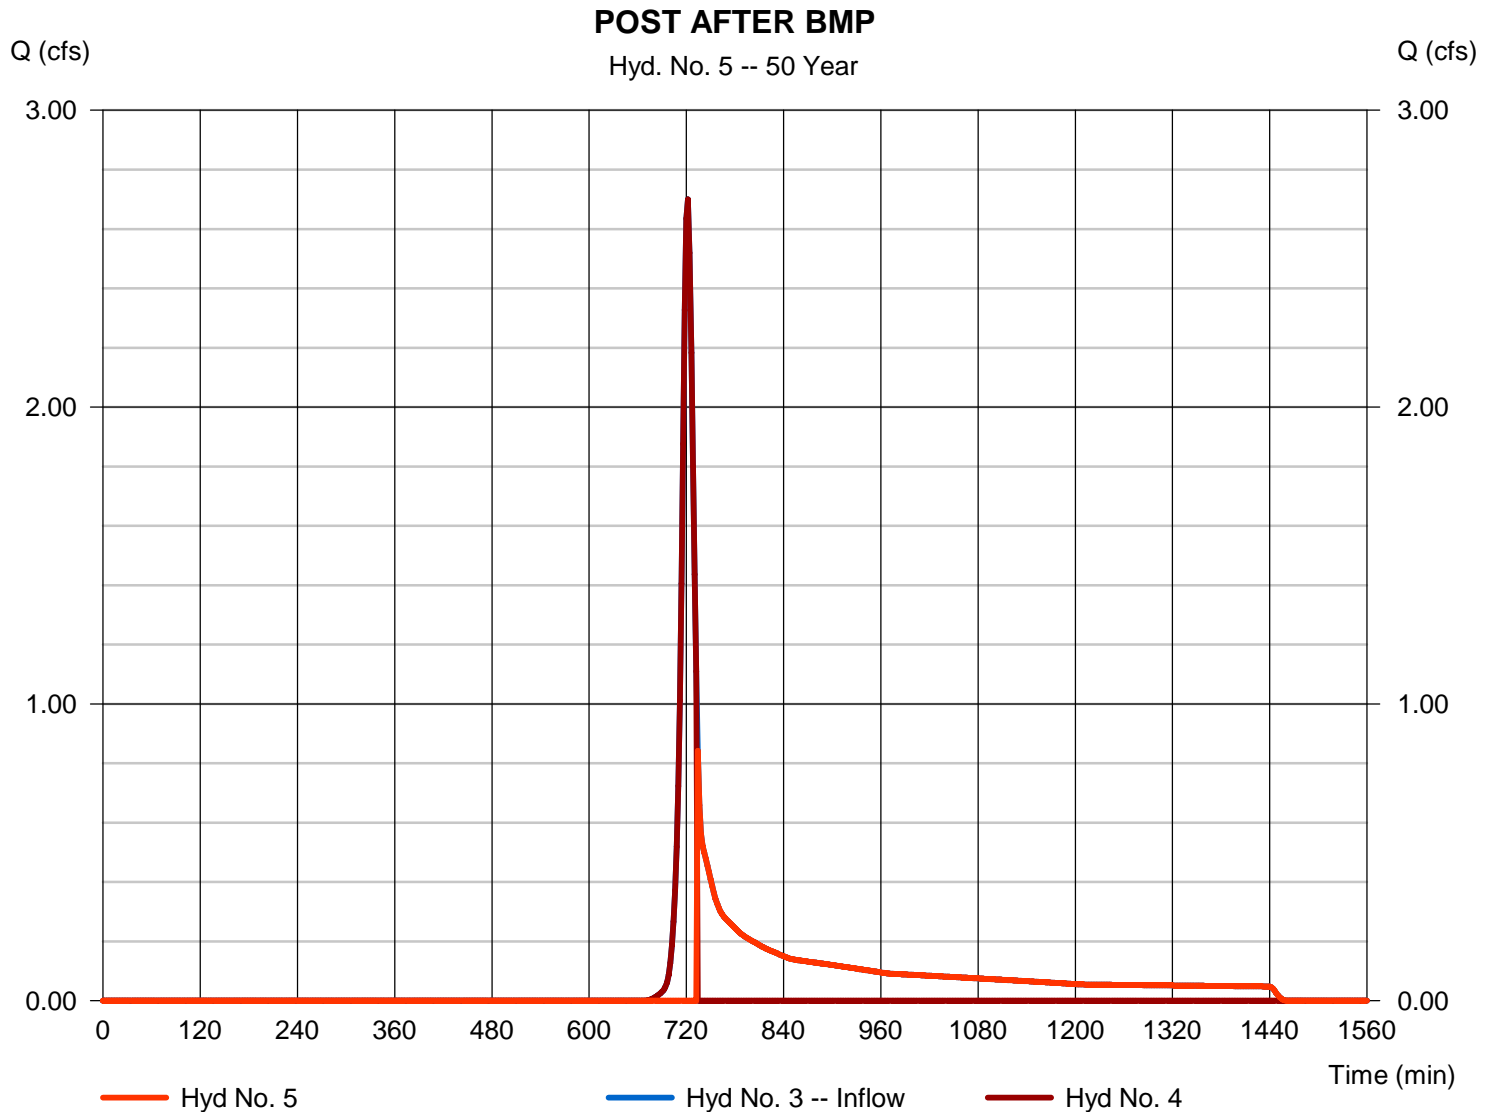

# Hydrograph Report


Hydraflow Hydrographs Extension for AutoCAD® Civil 3D® 2015 by Autodesk, Inc. v10.4

Tuesday, 11 / 1 / 2016

## Hyd. No. 6

POST AT POI

Hydrograph type	= Combine	Peak discharge	= 3.063 cfs
Storm frequency	= 50 yrs	Time to peak	= 722 min
Time interval	= 2 min	Hyd. volume	= 13,058 cuft
Inflow hyds.	= 2, 5	Contrib. drain. area	= 1.710 ac

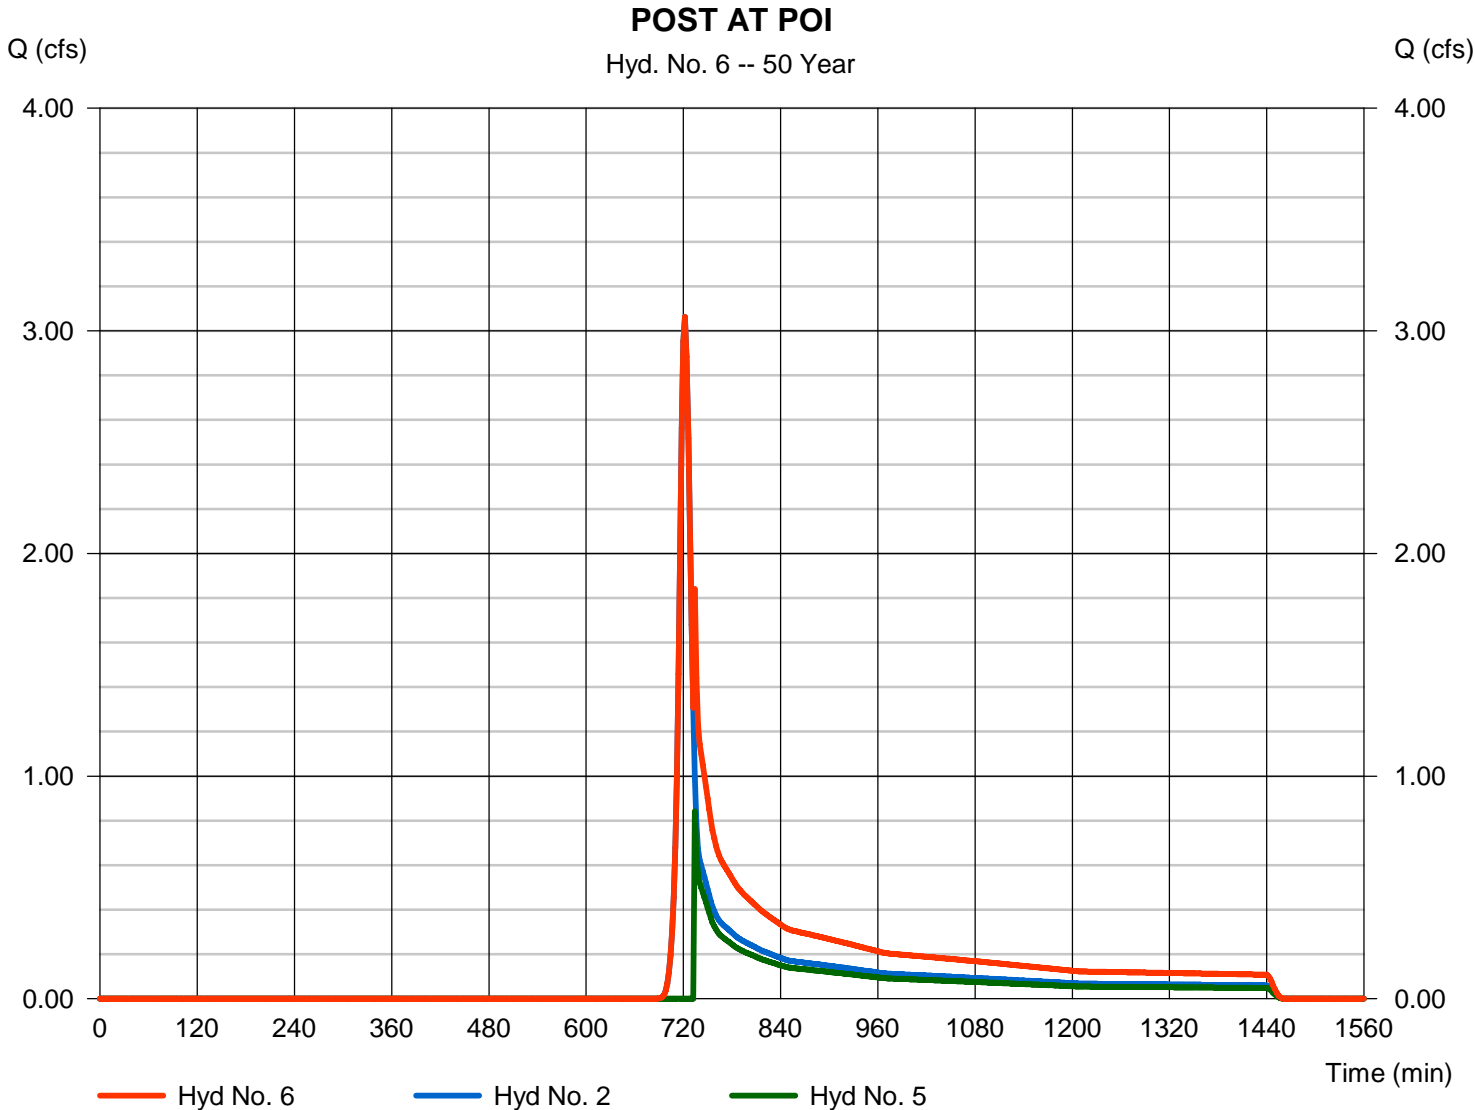

# Hydrograph Summary Report

Hydraflow Hydrographs Extension for AutoCAD® Civil 3D® 2015 by Autodesk, Inc. v10.4

Hyd. No.	Hydrograph type (origin)	Peak flow (cfs)	Time interval (min)	Time to Peak (min)	Hyd. volume (cuft)	Inflow hyd(s)	Maximum elevation (ft)	Total strge used (cuft)	Hydrograph Description	
1	SCS Runoff	7.172	2	722	19,463	-----	-----	-----	PRE	
2	SCS Runoff	4.129	2	722	11,206	-----	-----	-----	POST UNDETAINED	
3	SCS Runoff	3.540	2	722	9,428	-----	-----	-----	POST DETAINED	
4	Diversion1	3.540	2	722	2,877	3	-----	-----	VOLUME ABSTRACTION	
5	Diversion2	2.827	2	726	6,551	3	-----	-----	POST AFTER BMP	
6	Combine	6.166	2	726	17,757	2, 5	-----	-----	POST AT POI	
High Street.gpw					Return Period: 100 Year			Tuesday, 11 / 1 / 2016		

# Hydrograph Report

Hydraflow Hydrographs Extension for AutoCAD® Civil 3D® 2015 by Autodesk, Inc. v10.4


Tuesday, 11 / 1 / 2016

## Hyd. No. 1

PRE

Hydrograph type	= SCS Runoff	Peak discharge	= 7.172 cfs
Storm frequency	= 100 yrs	Time to peak	= 722 min
Time interval	= 2 min	Hyd. volume	= 19,463 cuft
Drainage area	= 2.970 ac	Curve number	= 58*
Basin Slope	= 0.0 %	Hydraulic length	= 0 ft
Tc method	= TR55	Time of conc. (Tc)	= 12.50 min
Total precip.	= 5.99 in	Distribution	= Type II
Storm duration	= 24 hrs	Shape factor	= 484

\* Composite (Area/CN) = [(2.966 x 58)] / 2.970

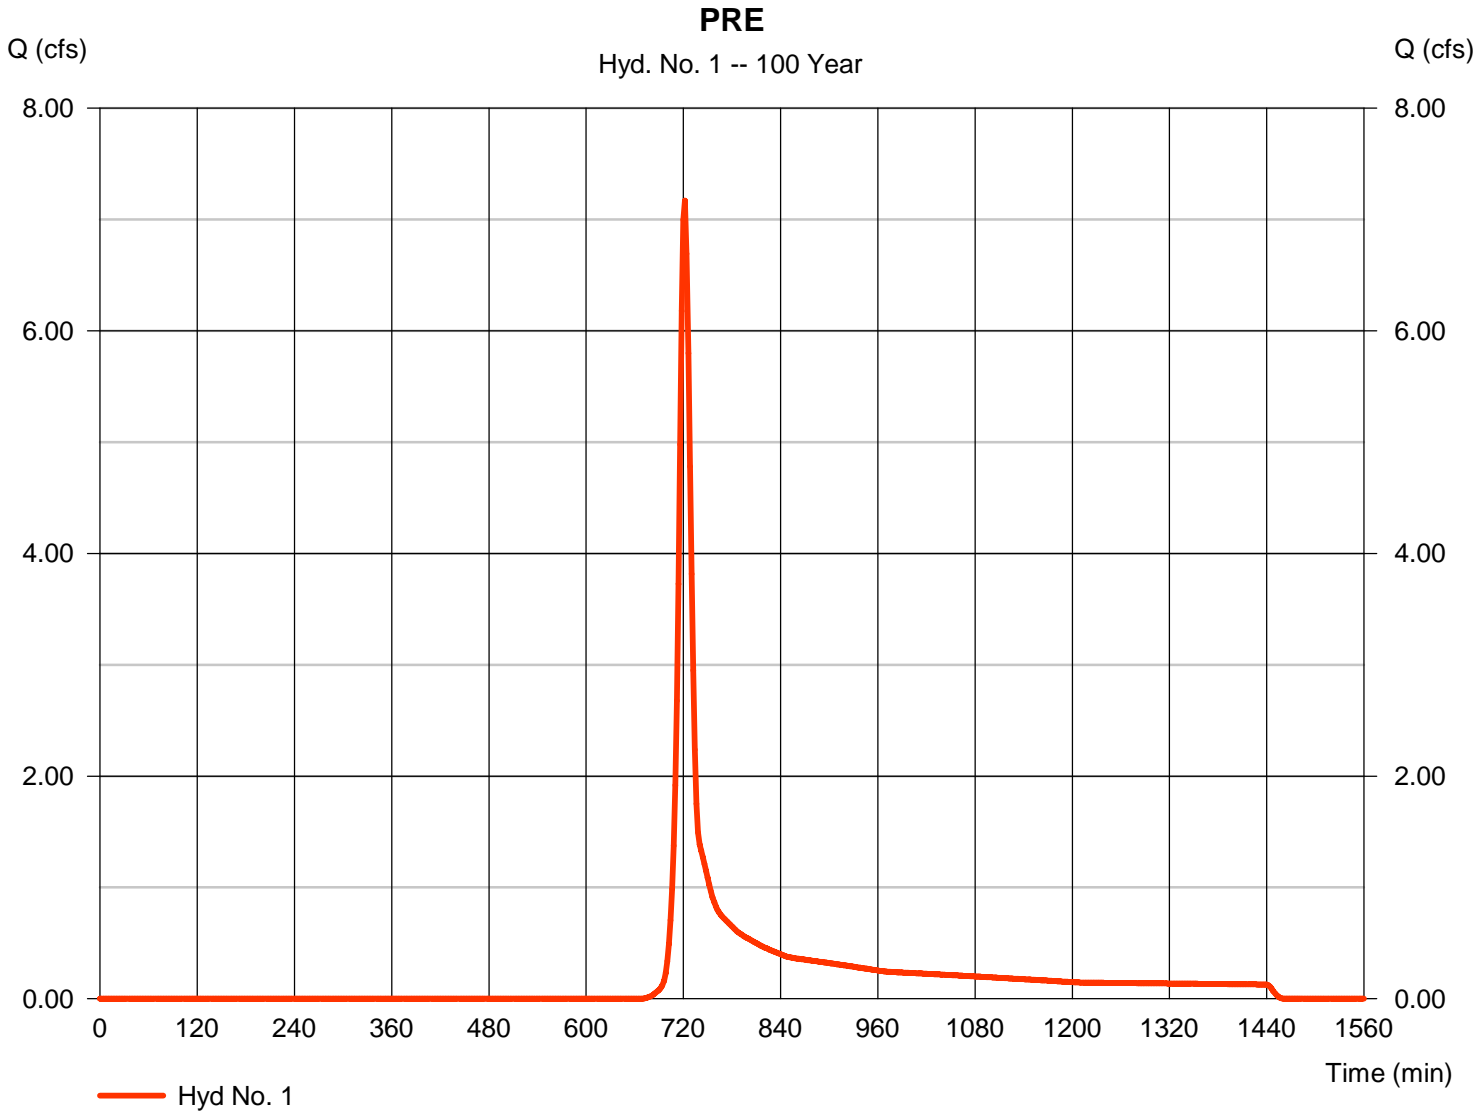

# Hydrograph Report

Hydraflow Hydrographs Extension for AutoCAD® Civil 3D® 2015 by Autodesk, Inc. v10.4


Tuesday, 11 / 1 / 2016

## Hyd. No. 2

### POST UNDETAINED

Hydrograph type	= SCS Runoff	Peak discharge	= 4.129 cfs
Storm frequency	= 100 yrs	Time to peak	= 722 min
Time interval	= 2 min	Hyd. volume	= 11,206 cuft
Drainage area	= 1.710 ac	Curve number	= 58*
Basin Slope	= 0.0 %	Hydraulic length	= 0 ft
Tc method	= TR55	Time of conc. (Tc)	= 11.10 min
Total precip.	= 5.99 in	Distribution	= Type II
Storm duration	= 24 hrs	Shape factor	= 484

\* Composite (Area/CN) = [(1.700 x 58) + (0.010 x 85)] / 1.710

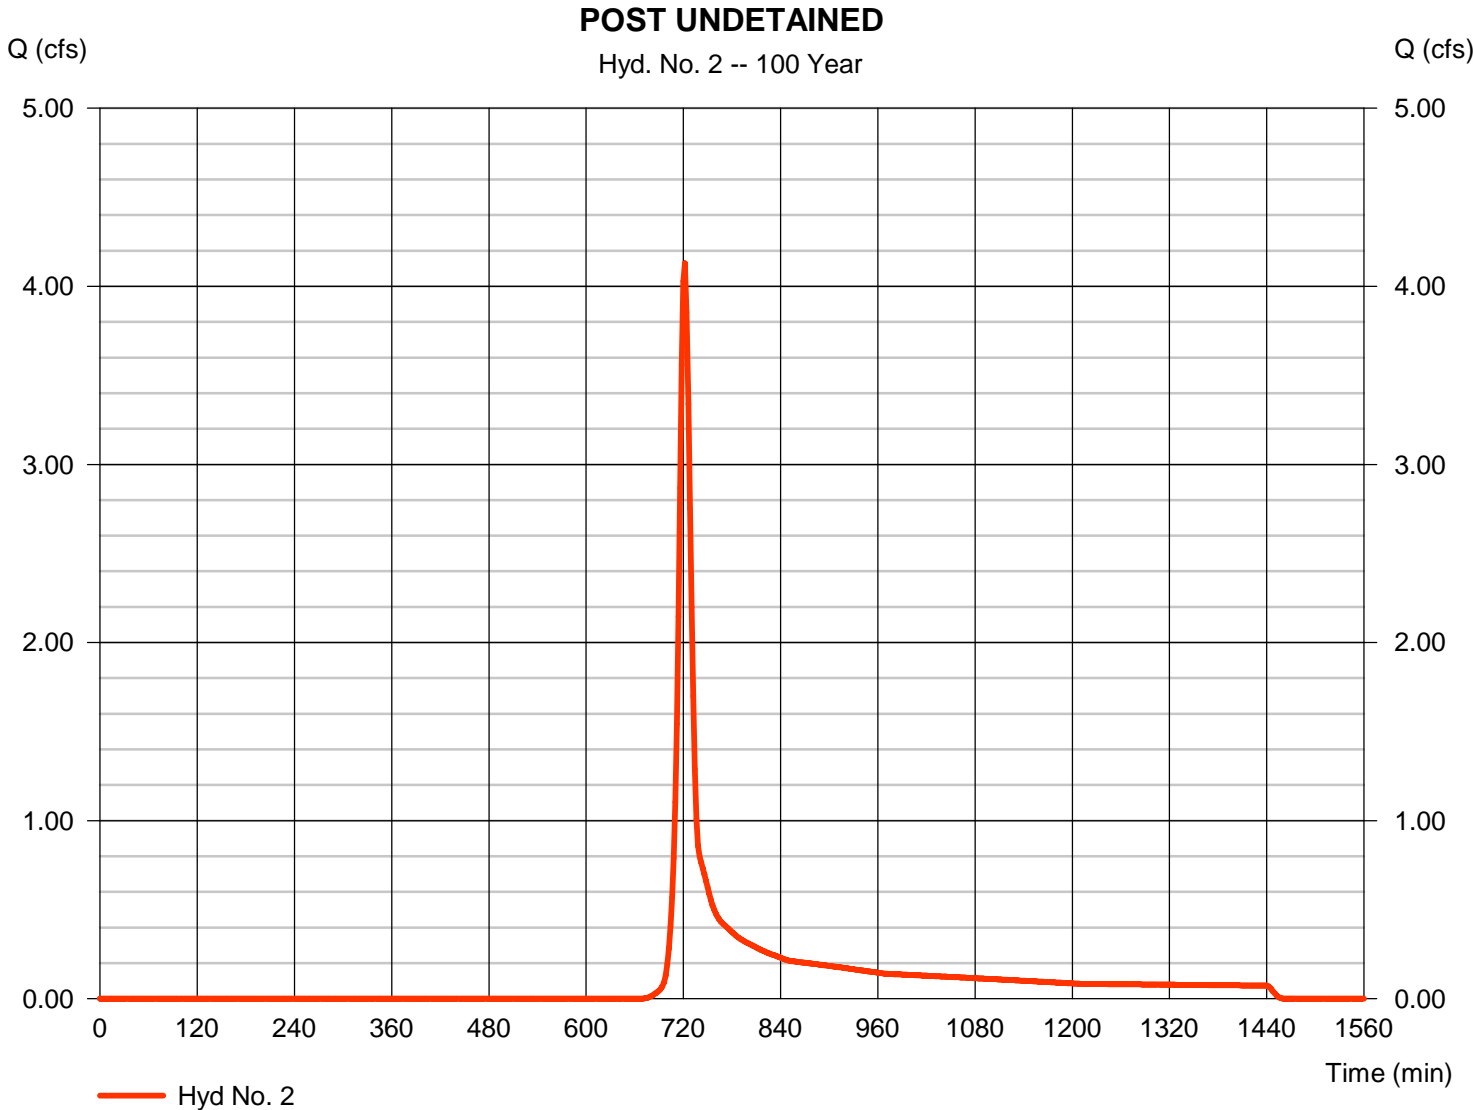




# Hydrograph Report

## Hyd. No. 3

### POST DETAINED

Hydrograph type	= SCS Runoff	Peak discharge	= 3.540 cfs
Storm frequency	= 100 yrs	Time to peak	= 722 min
Time interval	= 2 min	Hyd. volume	= 9,428 cuft
Drainage area	= 1.260 ac	Curve number	= 61*
Basin Slope	= 0.0 %	Hydraulic length	= 0 ft
Tc method	= TR55	Time of conc. (Tc)	= 11.70 min
Total precip.	= 5.99 in	Distribution	= Type II
Storm duration	= 24 hrs	Shape factor	= 484

\* Composite (Area/CN) = [(0.137 x 85) + (1.123 x 58)] / 1.260

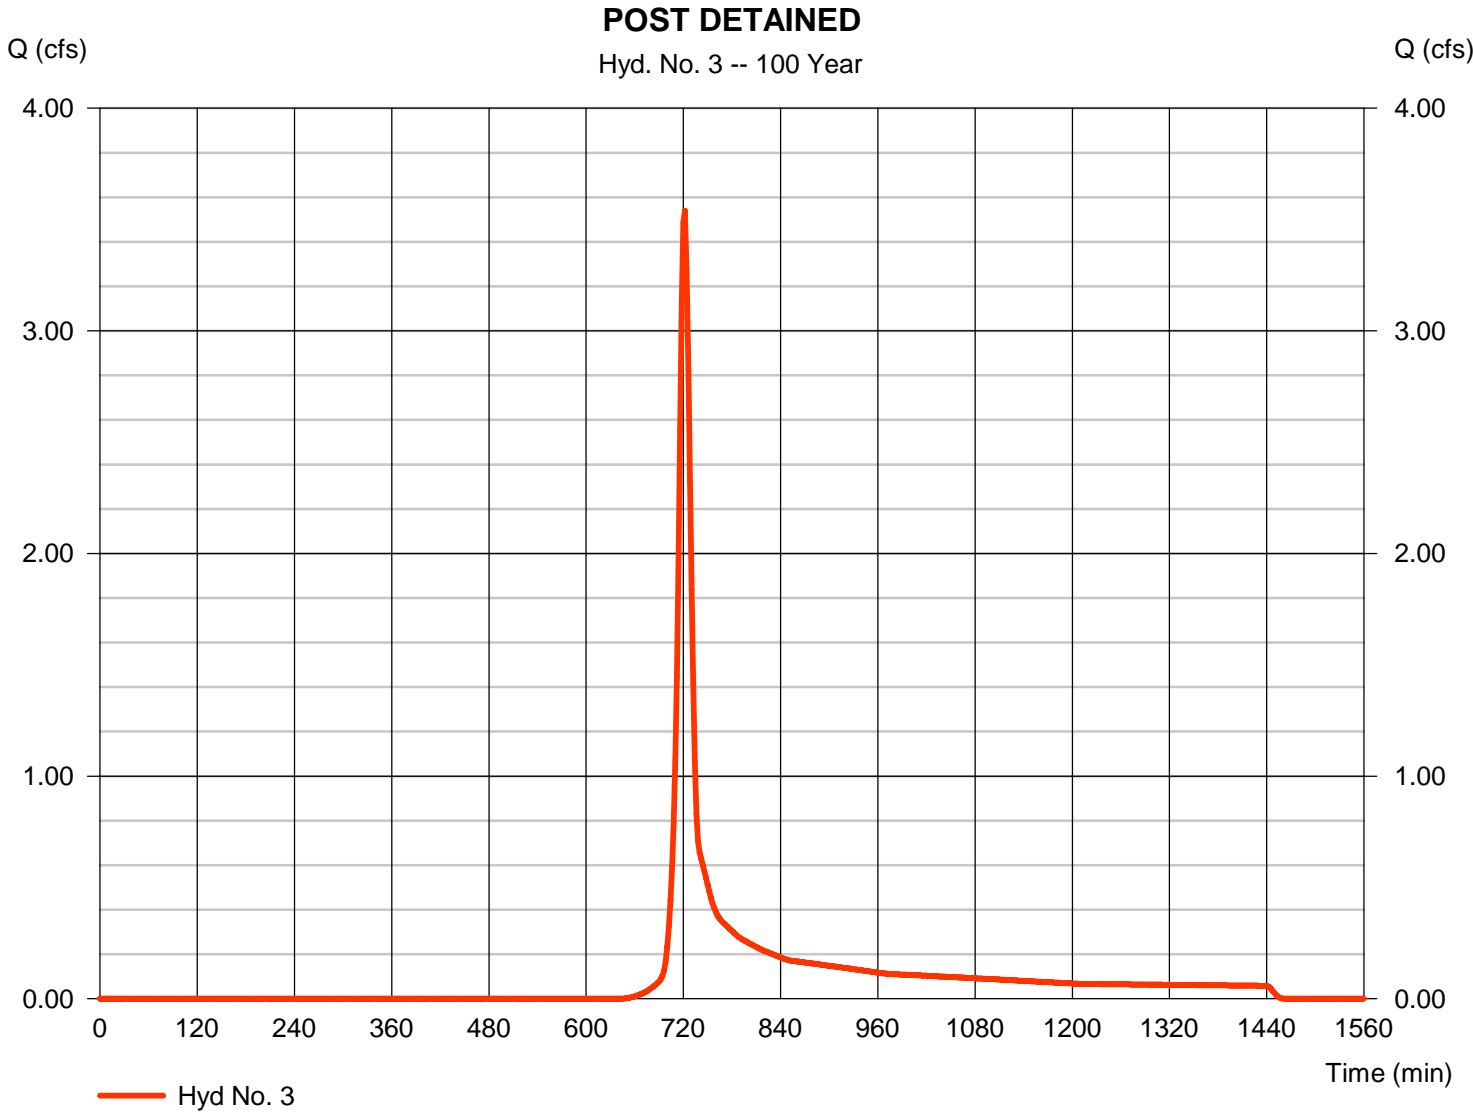

# Hydrograph Report


Hydraflow Hydrographs Extension for AutoCAD® Civil 3D® 2015 by Autodesk, Inc. v10.4

Tuesday, 11 / 1 / 2016

## Hyd. No. 4

### VOLUME ABSTRACTION

Hydrograph type	= Diversion1	Peak discharge	= 3.540 cfs
Storm frequency	= 100 yrs	Time to peak	= 722 min
Time interval	= 2 min	Hyd. volume	= 2,877 cuft
Inflow hydrograph	= 3 - POST DETAINED	2nd diverted hyd.	= 5
Diversion method	= First Flush Volume	Volume Up To	= 2,700 cuft

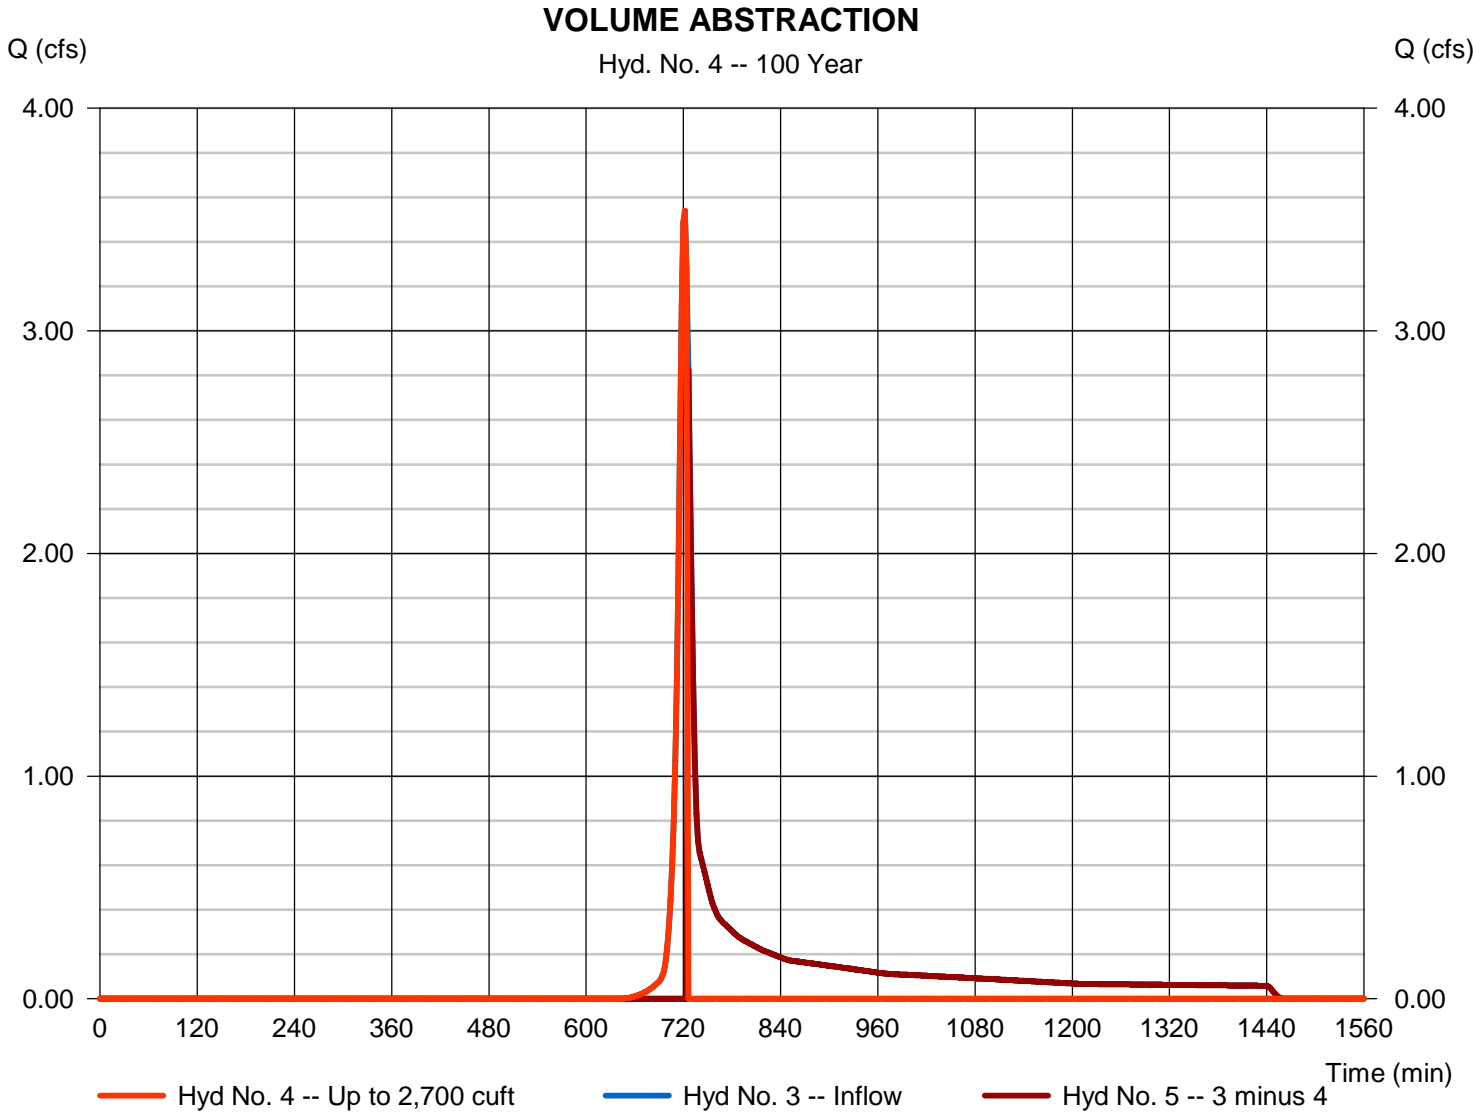

# Hydrograph Report


Hydraflow Hydrographs Extension for AutoCAD® Civil 3D® 2015 by Autodesk, Inc. v10.4

Tuesday, 11 / 1 / 2016

## Hyd. No. 5

POST AFTER BMP

Hydrograph type	= Diversion2	Peak discharge	= 2.827 cfs
Storm frequency	= 100 yrs	Time to peak	= 726 min
Time interval	= 2 min	Hyd. volume	= 6,551 cuft
Inflow hydrograph	= 3 - POST DETAINED	2nd diverted hyd.	= 4
Diversion method	= First Flush Volume	Volume Up To	= 2,700 cuft

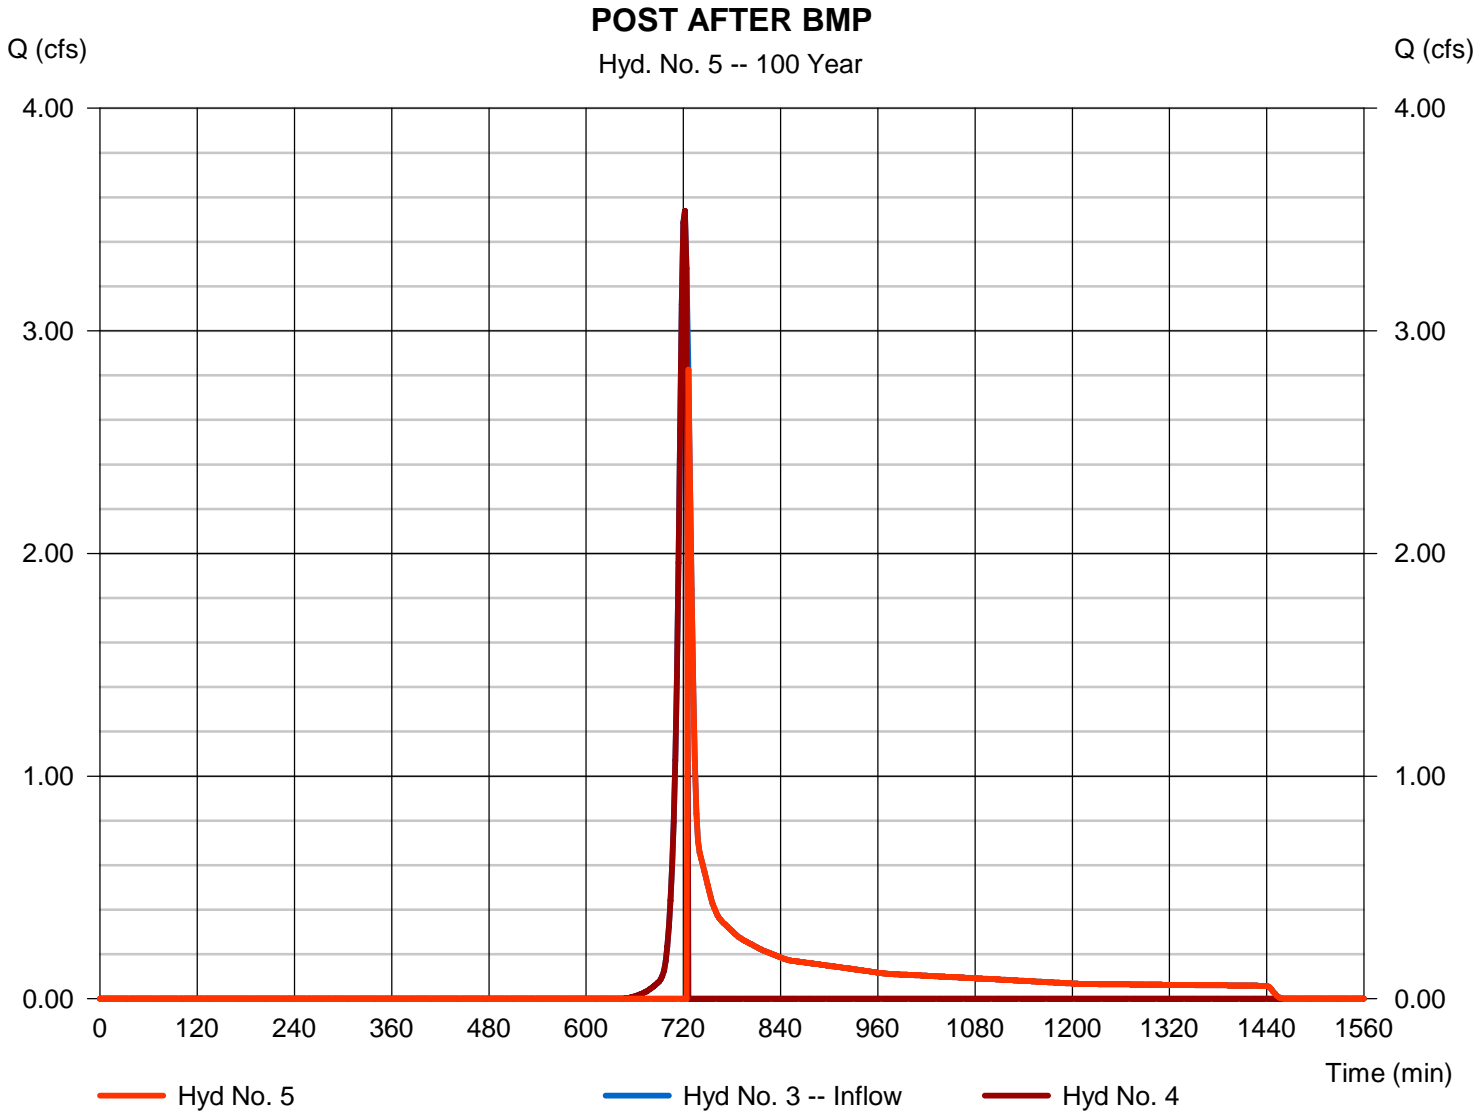

# Hydrograph Report

Hydraflow Hydrographs Extension for AutoCAD® Civil 3D® 2015 by Autodesk, Inc. v10.4


Tuesday, 11 / 1 / 2016

## Hyd. No. 6

POST AT POI

Hydrograph type = Combine  
Storm frequency = 100 yrs  
Time interval = 2 min  
Inflow hyds. = 2, 5


Peak discharge = 6.166 cfs  
Time to peak = 726 min  
Hyd. volume = 17,757 cuft  
Contrib. drain. area = 1.710 ac

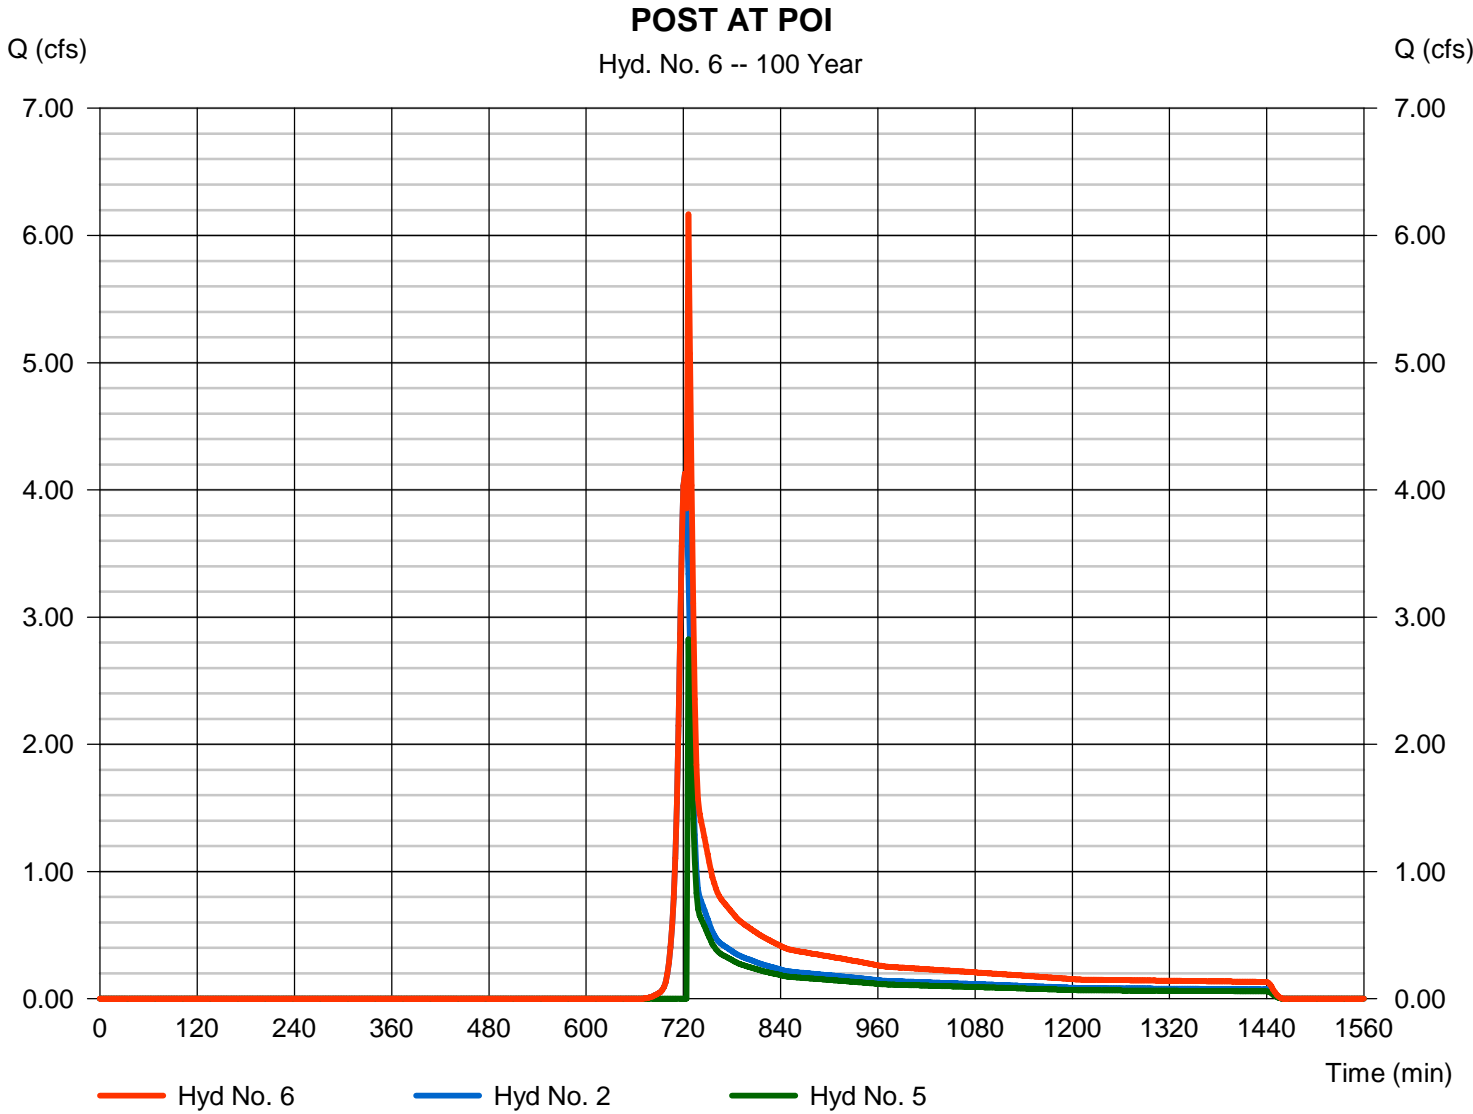



# Watershed Model Schematic

Hydraflow Hydrographs Extension for AutoCAD® Civil 3D® 2015 by Autodesk, Inc. v10.4

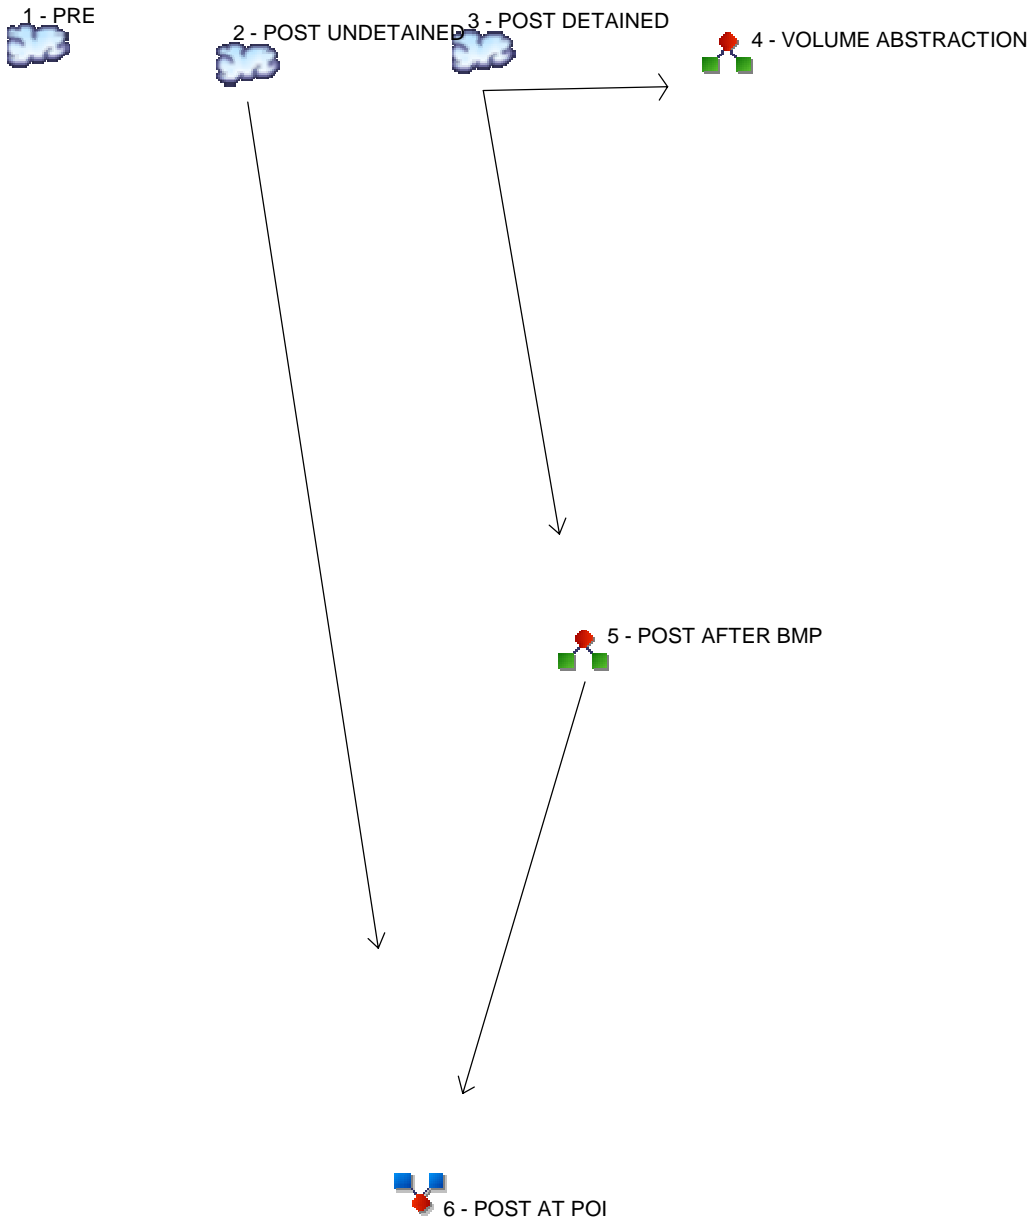

**Legend**

Hyd. Origin	Description
1 SCS Runoff	PRE
2 SCS Runoff	POST UNDETAINED
3 SCS Runoff	POST DETAINED
4 Diversion1	VOLUME ABSTRACTION
5 Diversion2	POST AFTER BMP
6 Combine	POST AT POI

# Hydrograph Return Period Recap

Hydroflow Hydrographs Extension for AutoCAD® Civil 3D® 2015 by Autodesk, Inc. v10.4

Hyd. No.	Hydrograph type (origin)	Inflow hyd(s)	Peak Outflow (cfs)								Hydrograph Description
			1-yr	2-yr	3-yr	5-yr	10-yr	25-yr	50-yr	100-yr	
1	SCS Runoff	-----	-----	0.223	-----	-----	-----	-----	-----	-----	PRE
2	SCS Runoff	-----	-----	0.129	-----	-----	-----	-----	-----	-----	POST UNDETAINED
3	SCS Runoff	-----	-----	0.065	-----	-----	-----	-----	-----	-----	POST DETAINED
4	Diversion1	3	-----	0.065	-----	-----	-----	-----	-----	-----	VOLUME ABSTRACTION
5	Diversion2	3	-----	0.000	-----	-----	-----	-----	-----	-----	POST AFTER BMP
6	Combine	2, 5	-----	0.129	-----	-----	-----	-----	-----	-----	POST AT POI

# Hydrograph Summary Report

Hydraflow Hydrographs Extension for AutoCAD® Civil 3D® 2015 by Autodesk, Inc. v10.4

Hyd. No.	Hydrograph type (origin)	Peak flow (cfs)	Time interval (min)	Time to Peak (min)	Hyd. volume (cuft)	Inflow hyd(s)	Maximum elevation (ft)	Total strge used (cuft)	Hydrograph Description
1	SCS Runoff	0.223	2	726	1,954	-----	-----	-----	PRE
2	SCS Runoff	0.129	2	726	1,125	-----	-----	-----	POST UNDETAINED
3	SCS Runoff	0.065	2	802	1,137	-----	-----	-----	POST DETAINED
4	Diversion1	0.065	2	802	1,137	3	-----	-----	VOLUME ABSTRACTION
5	Diversion2	0.000	2	n/a	0	3	-----	-----	POST AFTER BMP
6	Combine	0.129	2	726	1,125	2, 5	-----	-----	POST AT POI




# Hydrograph Report

## Hyd. No. 1

PRE

Hydrograph type	= SCS Runoff	Peak discharge	= 0.223 cfs
Storm frequency	= 2 yrs	Time to peak	= 726 min
Time interval	= 2 min	Hyd. volume	= 1,954 cuft
Drainage area	= 2.970 ac	Curve number	= 58*
Basin Slope	= 0.0 %	Hydraulic length	= 0 ft
Tc method	= TR55	Time of conc. (Tc)	= 12.50 min
Total precip.	= 2.67 in	Distribution	= Type II
Storm duration	= 24 hrs	Shape factor	= 484

\* Composite (Area/CN) = [(2.966 x 58)] / 2.970

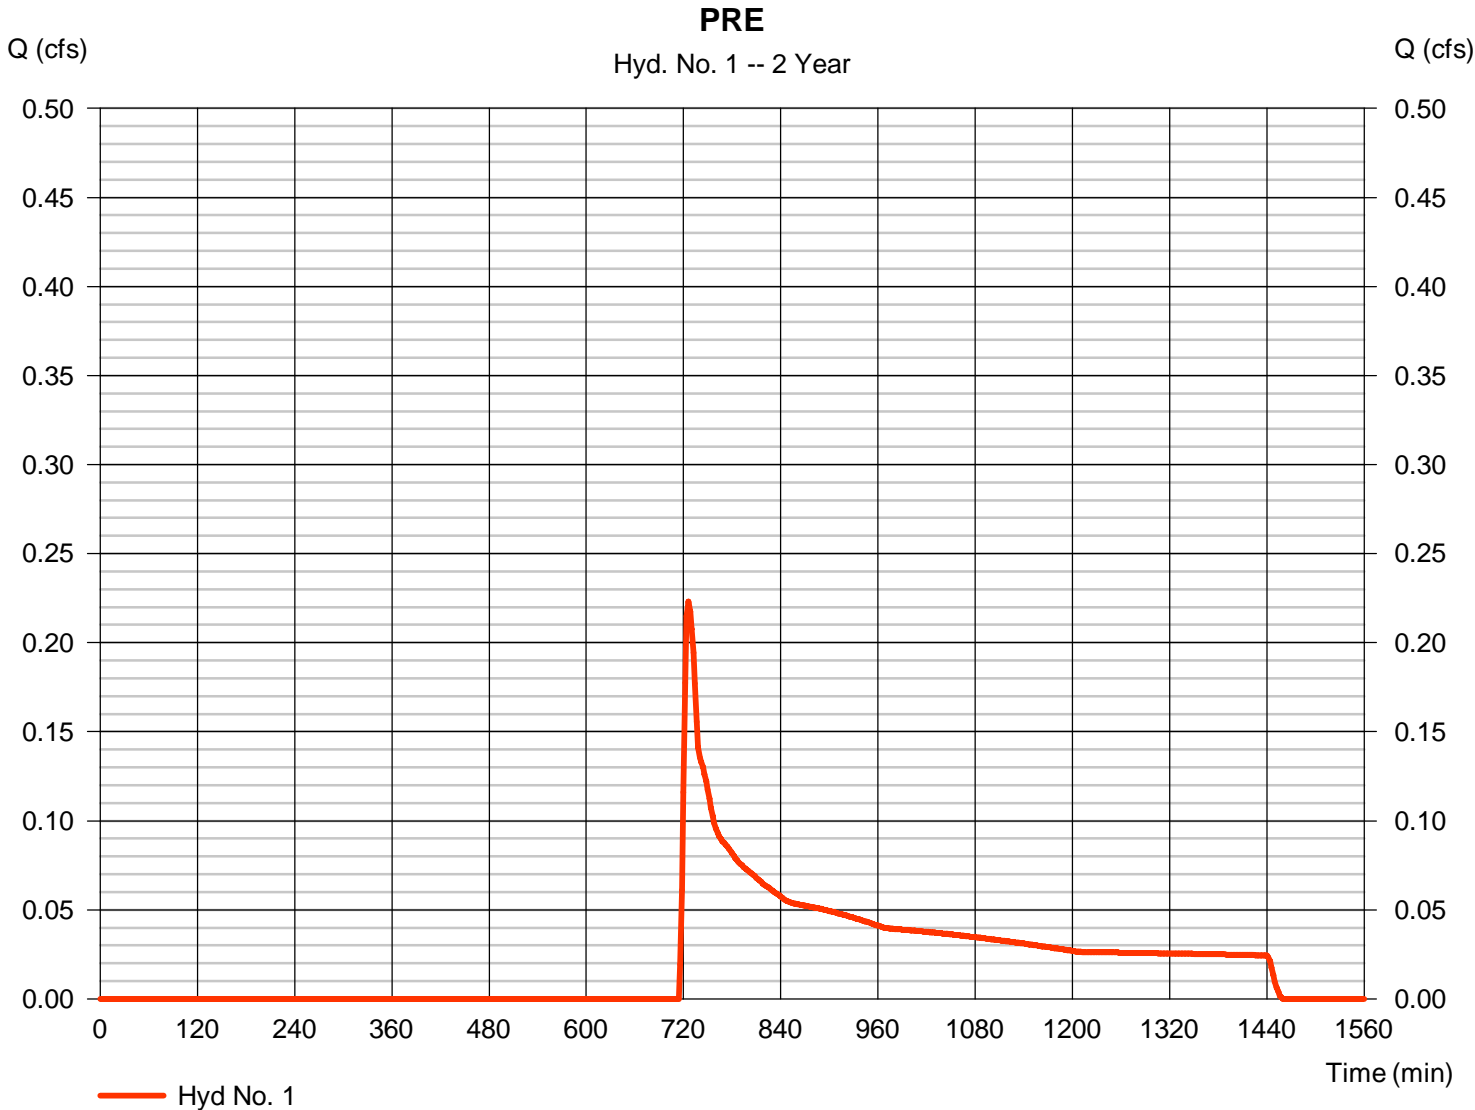

# TR55 Tc Worksheet

Hydraflow Hydrographs Extension for AutoCAD® Civil 3D® 2015 by Autodesk, Inc. v10.4

## Hyd. No. 1

PRE

<u>Description</u>	<u>A</u>	<u>B</u>	<u>C</u>	<u>Totals</u>
<b>Sheet Flow</b>				
Manning's n-value	= 0.240	0.011	0.011	
Flow length (ft)	= 50.0	0.0	0.0	
Two-year 24-hr precip. (in)	= 2.67	0.00	0.00	
Land slope (%)	= 2.50	0.00	0.00	
<b>Travel Time (min)</b>	<b>= 8.21</b>	<b>+ 0.00</b>	<b>+ 0.00</b>	<b>= 8.21</b>
<b>Shallow Concentrated Flow</b>				
Flow length (ft)	= 913.00	0.00	0.00	
Watercourse slope (%)	= 4.80	0.00	0.00	
Surface description	= Unpaved	Paved	Paved	
Average velocity (ft/s)	=3.53	0.00	0.00	
<b>Travel Time (min)</b>	<b>= 4.30</b>	<b>+ 0.00</b>	<b>+ 0.00</b>	<b>= 4.30</b>
<b>Channel Flow</b>				
X sectional flow area (sqft)	= 0.00	0.00	0.00	
Wetted perimeter (ft)	= 0.00	0.00	0.00	
Channel slope (%)	= 0.00	0.00	0.00	
Manning's n-value	= 0.015	0.015	0.015	
Velocity (ft/s)	=0.00	0.00	0.00	
Flow length (ft)	0.0	0.0	0.0	
<b>Travel Time (min)</b>	<b>= 0.00</b>	<b>+ 0.00</b>	<b>+ 0.00</b>	<b>= 0.00</b>
<b>Total Travel Time, Tc .....</b>				<b>12.50 min</b>

# Hydrograph Report

Hydraflow Hydrographs Extension for AutoCAD® Civil 3D® 2015 by Autodesk, Inc. v10.4


Tuesday, 11 / 1 / 2016

## Hyd. No. 2

### POST UNDETAINED

Hydrograph type	= SCS Runoff	Peak discharge	= 0.129 cfs
Storm frequency	= 2 yrs	Time to peak	= 726 min
Time interval	= 2 min	Hyd. volume	= 1,125 cuft
Drainage area	= 1.710 ac	Curve number	= 58*
Basin Slope	= 0.0 %	Hydraulic length	= 0 ft
Tc method	= TR55	Time of conc. (Tc)	= 11.10 min
Total precip.	= 2.67 in	Distribution	= Type II
Storm duration	= 24 hrs	Shape factor	= 484

\* Composite (Area/CN) = [(1.700 x 58) + (0.010 x 85)] / 1.710

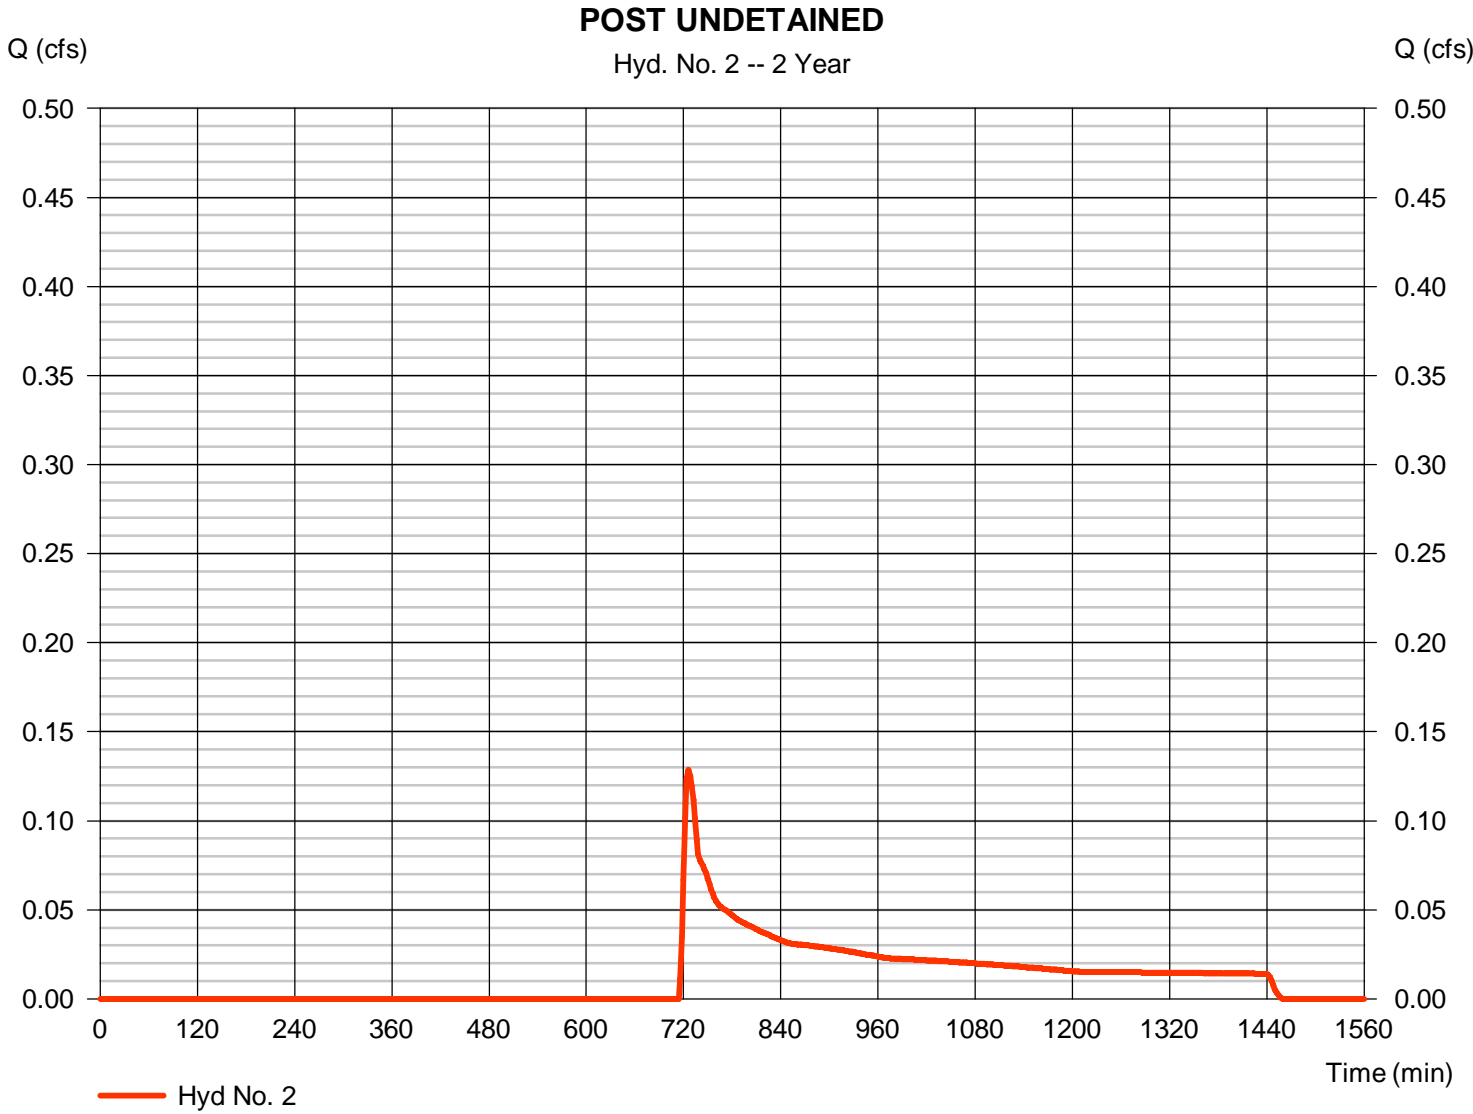

# TR55 Tc Worksheet

Hydraflow Hydrographs Extension for AutoCAD® Civil 3D® 2015 by Autodesk, Inc. v10.4

## Hyd. No. 2

POST UNDETAINED

<u>Description</u>	<u>A</u>	<u>B</u>	<u>C</u>	<u>Totals</u>
<b>Sheet Flow</b>				
Manning's n-value	= 0.240	0.011	0.011	
Flow length (ft)	= 50.0	0.0	0.0	
Two-year 24-hr precip. (in)	= 2.67	0.00	0.00	
Land slope (%)	= 4.00	0.00	0.00	
<b>Travel Time (min)</b>	<b>= 6.80</b>	<b>+</b> <b>0.00</b>	<b>+</b> <b>0.00</b>	<b>= 6.80</b>
<b>Shallow Concentrated Flow</b>				
Flow length (ft)	= 672.00	60.00	133.00	
Watercourse slope (%)	= 4.30	4.00	8.30	
Surface description	= Unpaved	Paved	Unpaved	
Average velocity (ft/s)	=3.35	4.07	4.65	
<b>Travel Time (min)</b>	<b>= 3.35</b>	<b>+</b> <b>0.25</b>	<b>+</b> <b>0.48</b>	<b>= 4.07</b>
<b>Channel Flow</b>				
X sectional flow area (sqft)	= 2.00	0.00	0.00	
Wetted perimeter (ft)	= 4.47	0.00	0.00	
Channel slope (%)	= 2.10	0.00	0.00	
Manning's n-value	= 0.015	0.015	0.015	
Velocity (ft/s)	=8.40	0.00	0.00	
Flow length (ft)	{{0}}96.0	0.0	0.0	
<b>Travel Time (min)</b>	<b>= 0.19</b>	<b>+</b> <b>0.00</b>	<b>+</b> <b>0.00</b>	<b>= 0.19</b>
<b>Total Travel Time, Tc .....</b>				<b>11.10 min</b>

# Hydrograph Report

Hydraflow Hydrographs Extension for AutoCAD® Civil 3D® 2015 by Autodesk, Inc. v10.4


Tuesday, 11 / 1 / 2016

## Hyd. No. 3

### POST DETAINED

Hydrograph type	= SCS Runoff	Peak discharge	= 0.065 cfs
Storm frequency	= 2 yrs	Time to peak	= 802 min
Time interval	= 2 min	Hyd. volume	= 1,137 cuft
Drainage area	= 1.260 ac	Curve number	= 61*
Basin Slope	= 0.0 %	Hydraulic length	= 0 ft
Tc method	= User	Time of conc. (Tc)	= 99.30 min
Total precip.	= 2.67 in	Distribution	= Type II
Storm duration	= 24 hrs	Shape factor	= 484

\* Composite (Area/CN) = [(0.137 x 85) + (1.123 x 58)] / 1.260

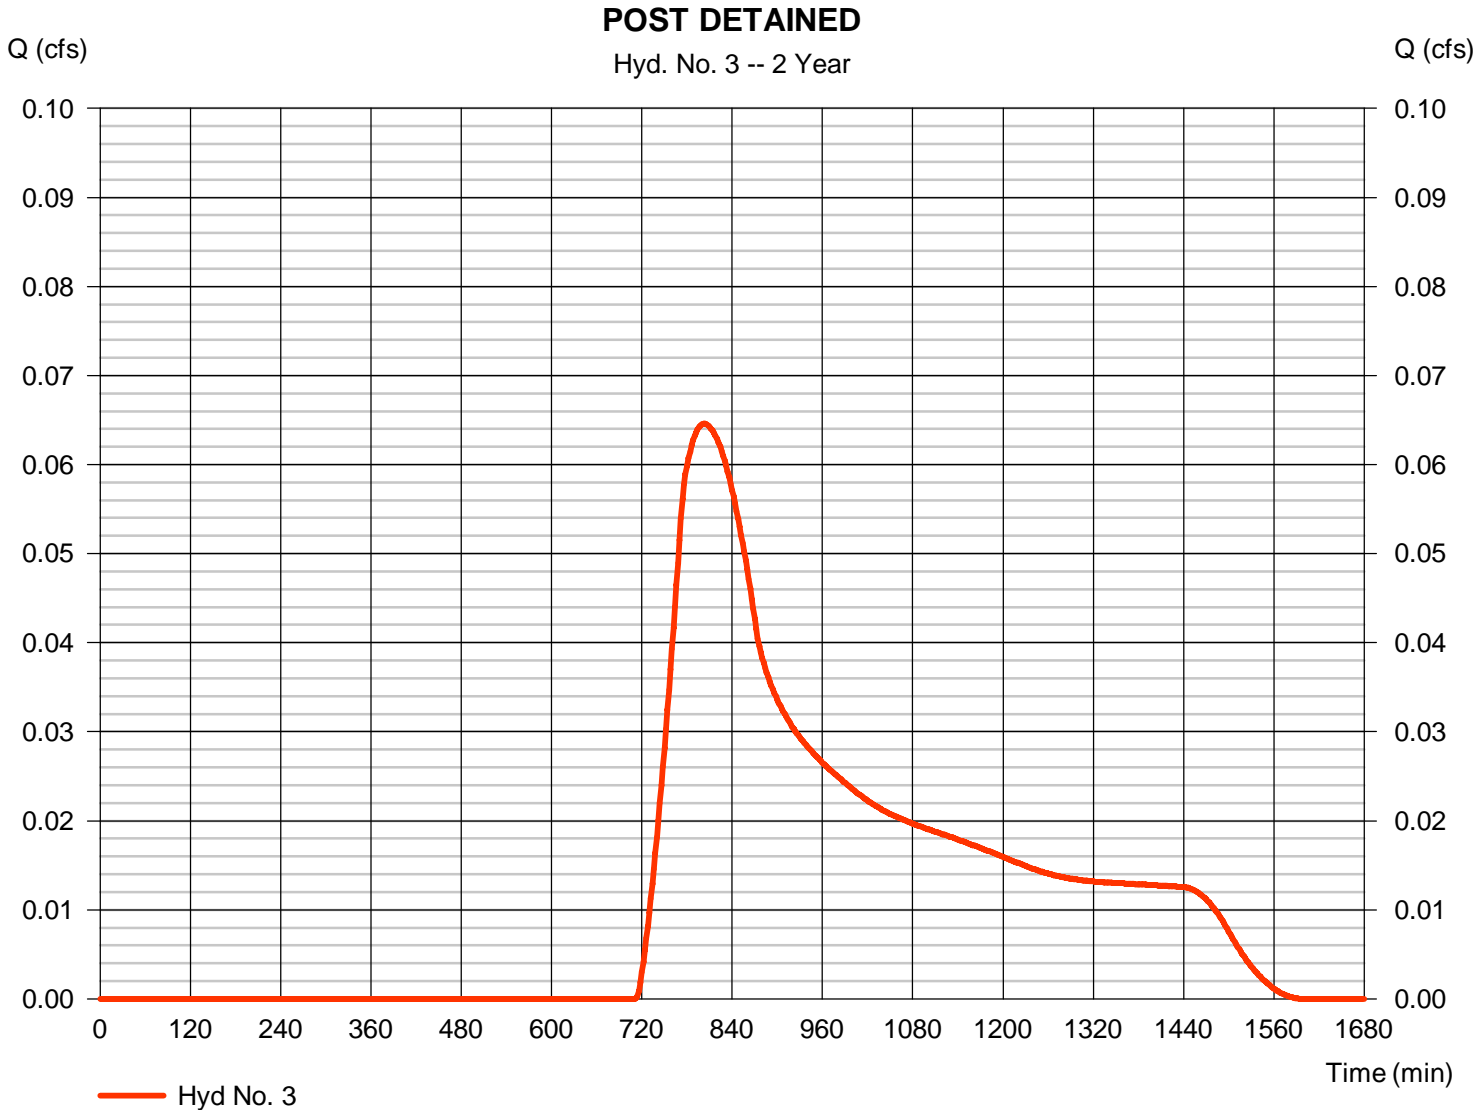

# Hydrograph Report


Hydraflow Hydrographs Extension for AutoCAD® Civil 3D® 2015 by Autodesk, Inc. v10.4

Tuesday, 11 / 1 / 2016

## Hyd. No. 4

### VOLUME ABSTRACTION

Hydrograph type	= Diversion1	Peak discharge	= 0.065 cfs
Storm frequency	= 2 yrs	Time to peak	= 802 min
Time interval	= 2 min	Hyd. volume	= 1,137 cuft
Inflow hydrograph	= 3 - POST DETAINED	2nd diverted hyd.	= 5
Diversion method	= First Flush Volume	Volume Up To	= 2,700 cuft

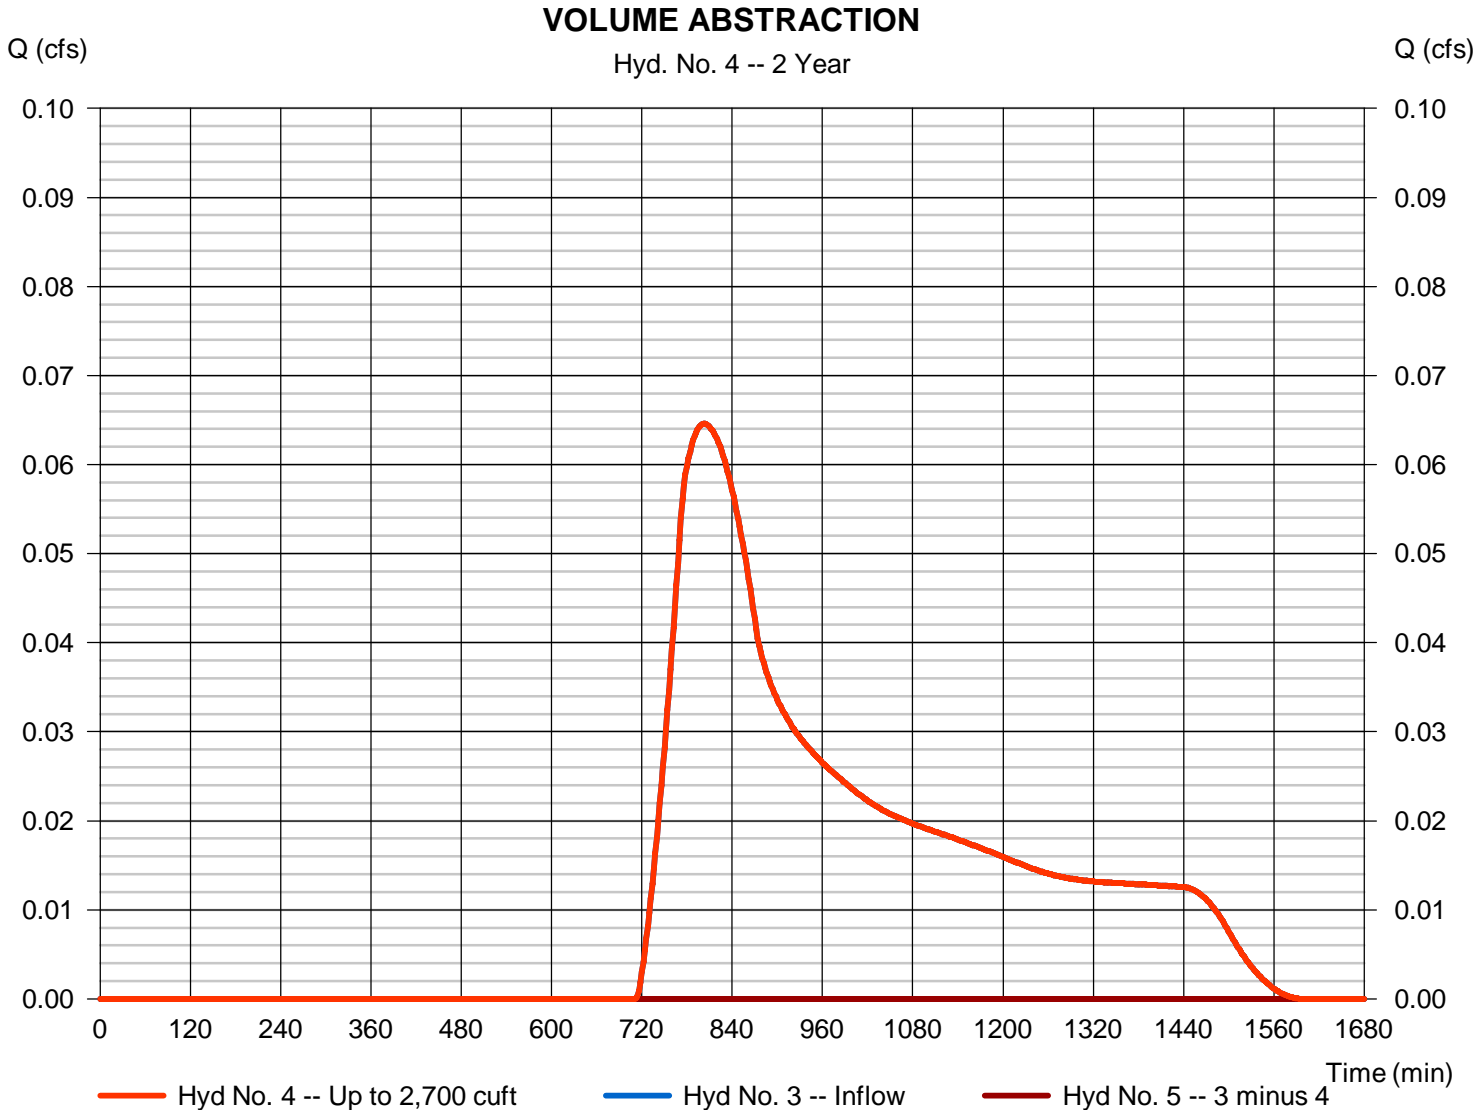

# Hydrograph Report


Hydraflow Hydrographs Extension for AutoCAD® Civil 3D® 2015 by Autodesk, Inc. v10.4

Tuesday, 11 / 1 / 2016

## Hyd. No. 5

POST AFTER BMP

Hydrograph type	= Diversion2	Peak discharge	= 0.000 cfs
Storm frequency	= 2 yrs	Time to peak	= n/a
Time interval	= 2 min	Hyd. volume	= 0 cuft
Inflow hydrograph	= 3 - POST DETAINED	2nd diverted hyd.	= 4
Diversion method	= First Flush Volume	Volume Up To	= 2,700 cuft

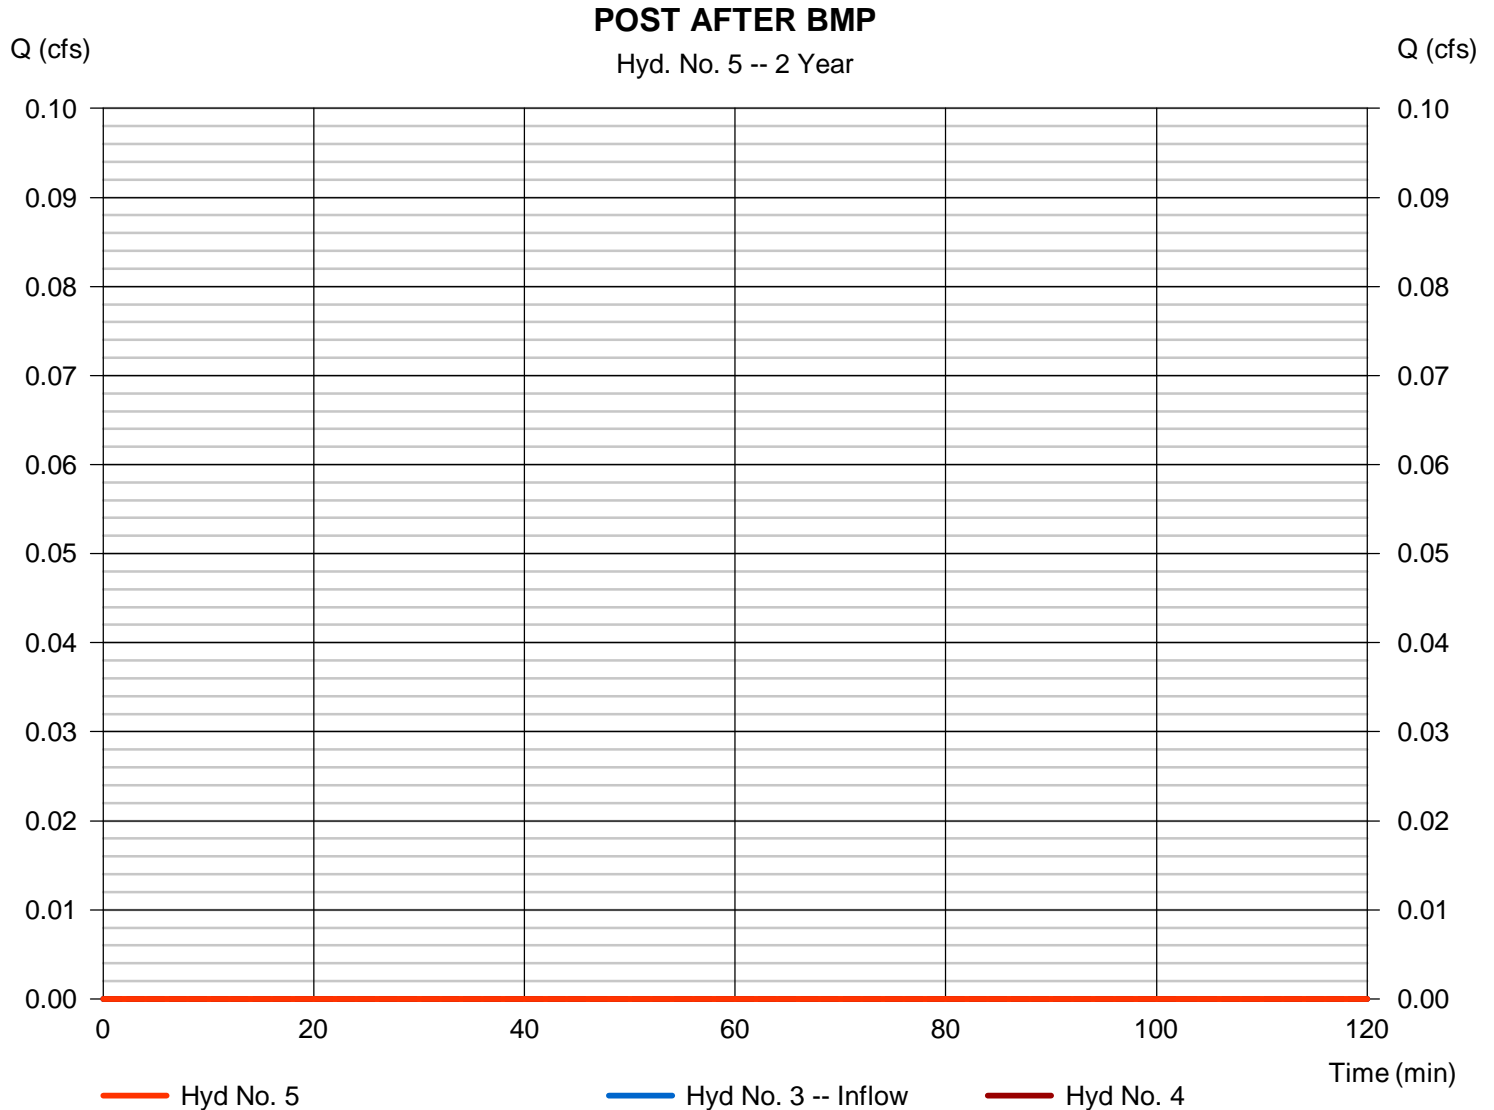

# Hydrograph Report


Hydraflow Hydrographs Extension for AutoCAD® Civil 3D® 2015 by Autodesk, Inc. v10.4

Tuesday, 11 / 1 / 2016

## Hyd. No. 6

POST AT POI

Hydrograph type	= Combine	Peak discharge	= 0.129 cfs
Storm frequency	= 2 yrs	Time to peak	= 726 min
Time interval	= 2 min	Hyd. volume	= 1,125 cuft
Inflow hyds.	= 2, 5	Contrib. drain. area	= 1.710 ac

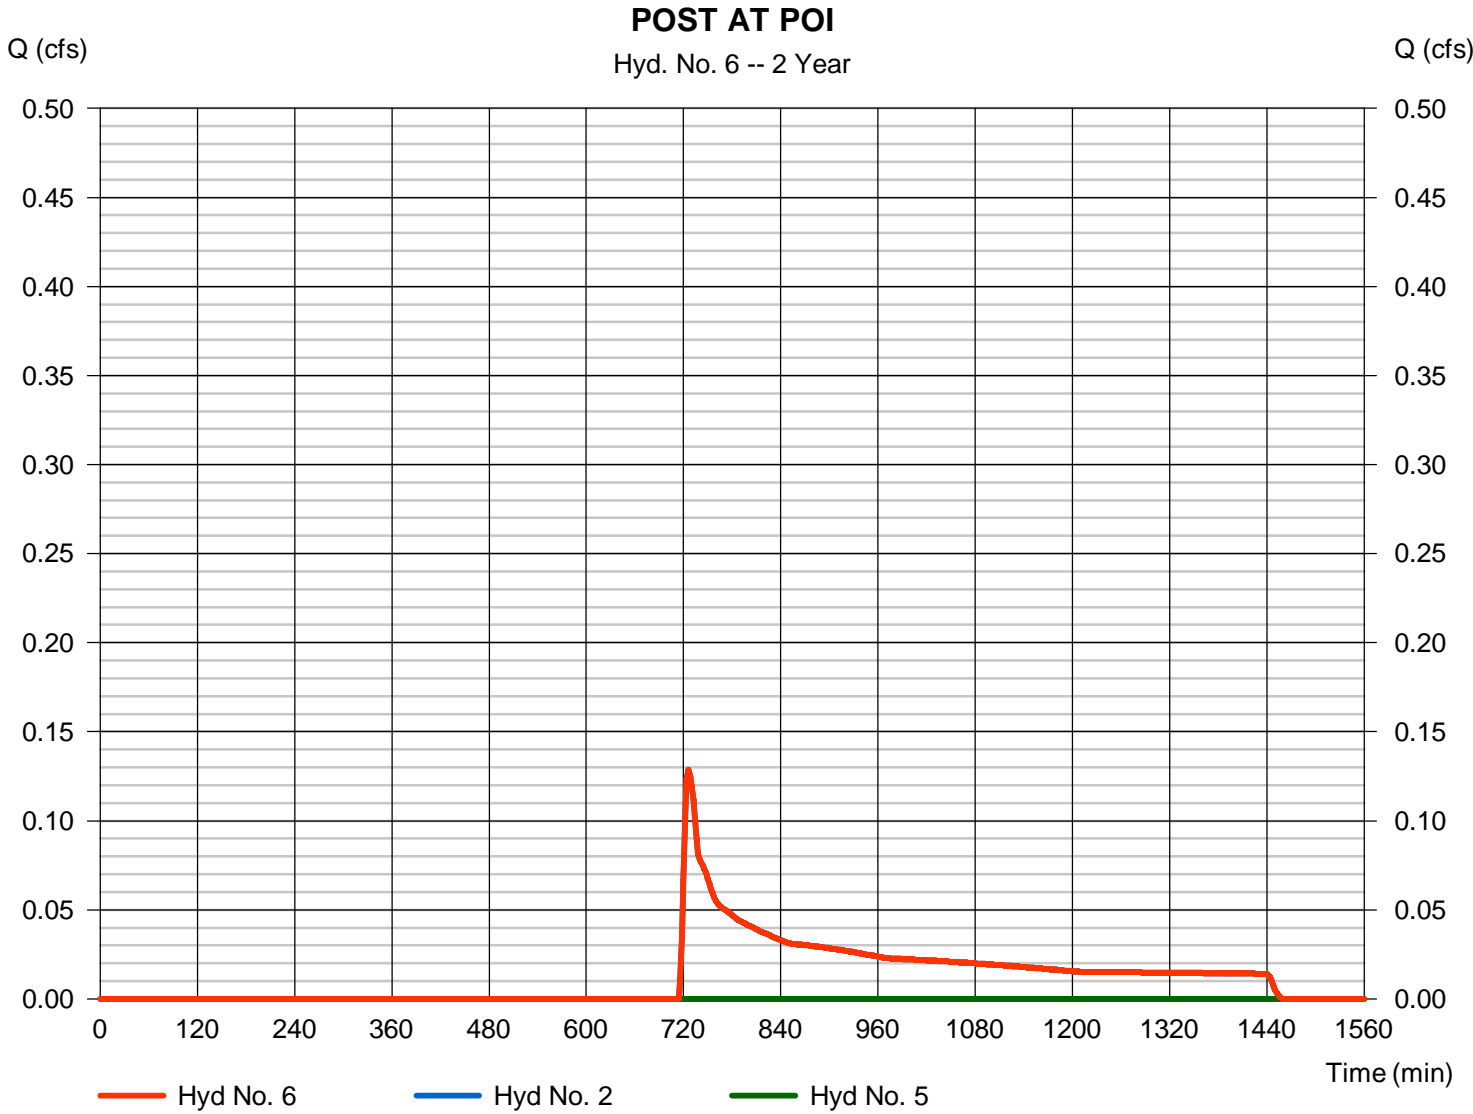






# Watershed Model Schematic

Hydraflow Hydrographs Extension for AutoCAD® Civil 3D® 2015 by Autodesk, Inc. v10.4

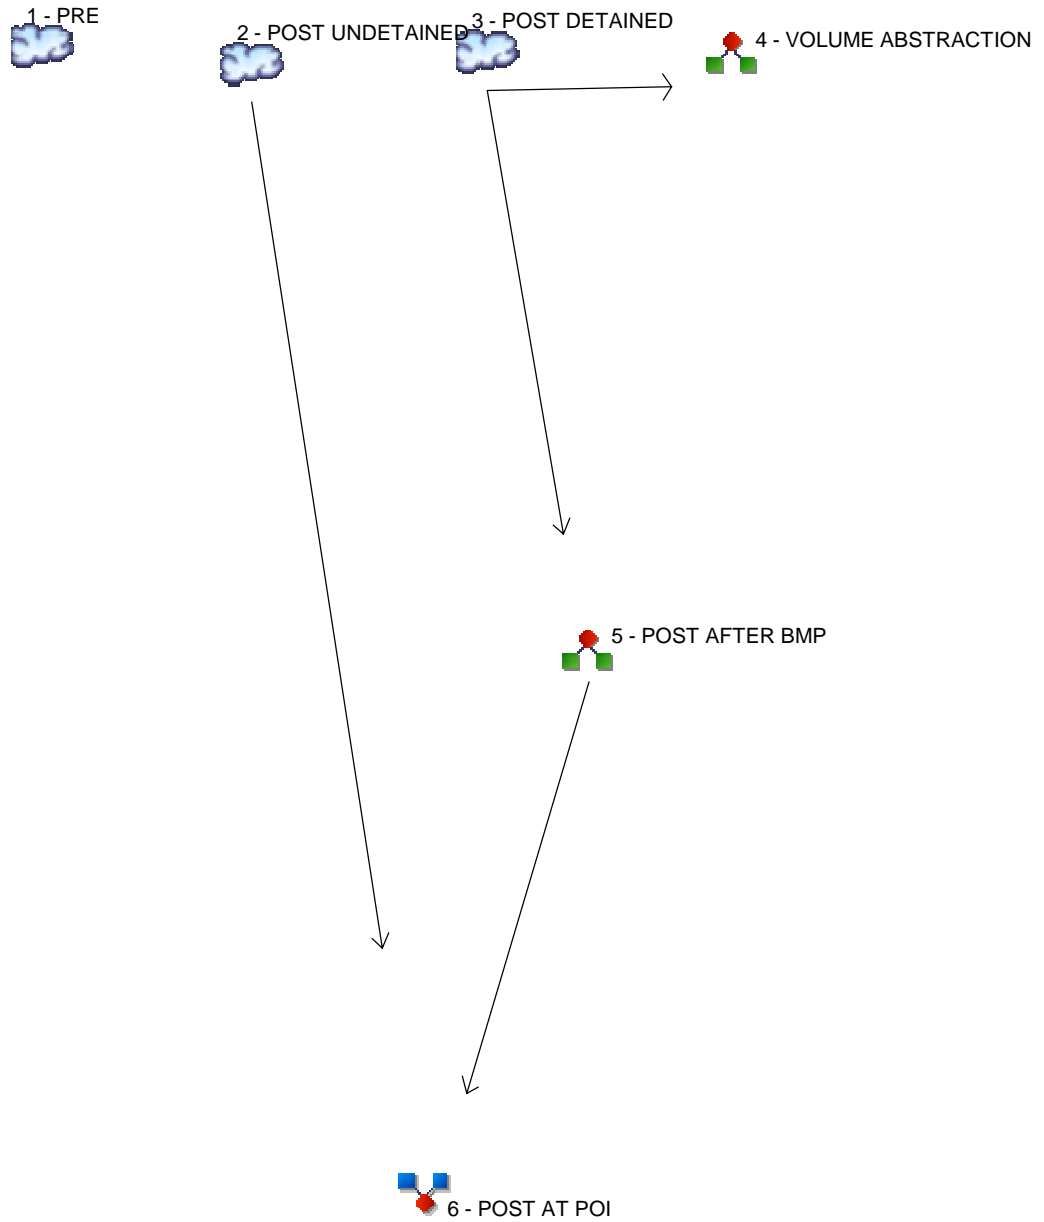

## Legend

Hyd. Origin	Description
1 SCS Runoff	PRE
2 SCS Runoff	POST UNDETAINED
3 SCS Runoff	POST DETAINED
4 Diversion1	VOLUME ABSTRACTION
5 Diversion2	POST AFTER BMP
6 Combine	POST AT POI

# Hydrograph Return Period Recap

Hydroflow Hydrographs Extension for AutoCAD® Civil 3D® 2015 by Autodesk, Inc. v10.4

Hyd. No.	Hydrograph type (origin)	Inflow hyd(s)	Peak Outflow (cfs)								Hydrograph Description
			1-yr	2-yr	3-yr	5-yr	10-yr	25-yr	50-yr	100-yr	
1	SCS Runoff	-----	-----	-----	-----	-----	1.984	-----	-----	-----	PRE
2	SCS Runoff	-----	-----	-----	-----	-----	1.142	-----	-----	-----	POST UNDETAINED
3	SCS Runoff	-----	-----	-----	-----	-----	0.456	-----	-----	-----	POST DETAINED
4	Diversion1	3	-----	-----	-----	-----	0.456	-----	-----	-----	VOLUME ABSTRACTION
5	Diversion2	3	-----	-----	-----	-----	0.042	-----	-----	-----	POST AFTER BMP
6	Combine	2, 5	-----	-----	-----	-----	1.142	-----	-----	-----	POST AT POI

# Hydrograph Summary Report

Hydraflow Hydrographs Extension for AutoCAD® Civil 3D® 2015 by Autodesk, Inc. v10.4

Hyd. No.	Hydrograph type (origin)	Peak flow (cfs)	Time interval (min)	Time to Peak (min)	Hyd. volume (cuft)	Inflow hyd(s)	Maximum elevation (ft)	Total strge used (cuft)	Hydrograph Description
1	SCS Runoff	1.984	2	722	6,748	-----	-----	-----	PRE
2	SCS Runoff	1.142	2	722	3,885	-----	-----	-----	POST UNDETAINED
3	SCS Runoff	0.456	2	746	3,418	-----	-----	-----	POST DETAINED
4	Diversion1	0.456	2	746	2,701	3	-----	-----	VOLUME ABSTRACTION
5	Diversion2	0.042	2	1096	717	3	-----	-----	POST AFTER BMP
6	Combine	1.142	2	722	4,602	2, 5	-----	-----	POST AT POI

# Hydrograph Report

Hydraflow Hydrographs Extension for AutoCAD® Civil 3D® 2015 by Autodesk, Inc. v10.4


Tuesday, 11 / 1 / 2016

## Hyd. No. 1

PRE

Hydrograph type	= SCS Runoff	Peak discharge	= 1.984 cfs
Storm frequency	= 10 yrs	Time to peak	= 722 min
Time interval	= 2 min	Hyd. volume	= 6,748 cuft
Drainage area	= 2.970 ac	Curve number	= 58*
Basin Slope	= 0.0 %	Hydraulic length	= 0 ft
Tc method	= TR55	Time of conc. (Tc)	= 12.50 min
Total precip.	= 3.87 in	Distribution	= Type II
Storm duration	= 24 hrs	Shape factor	= 484

\* Composite (Area/CN) = [(2.966 x 58)] / 2.970

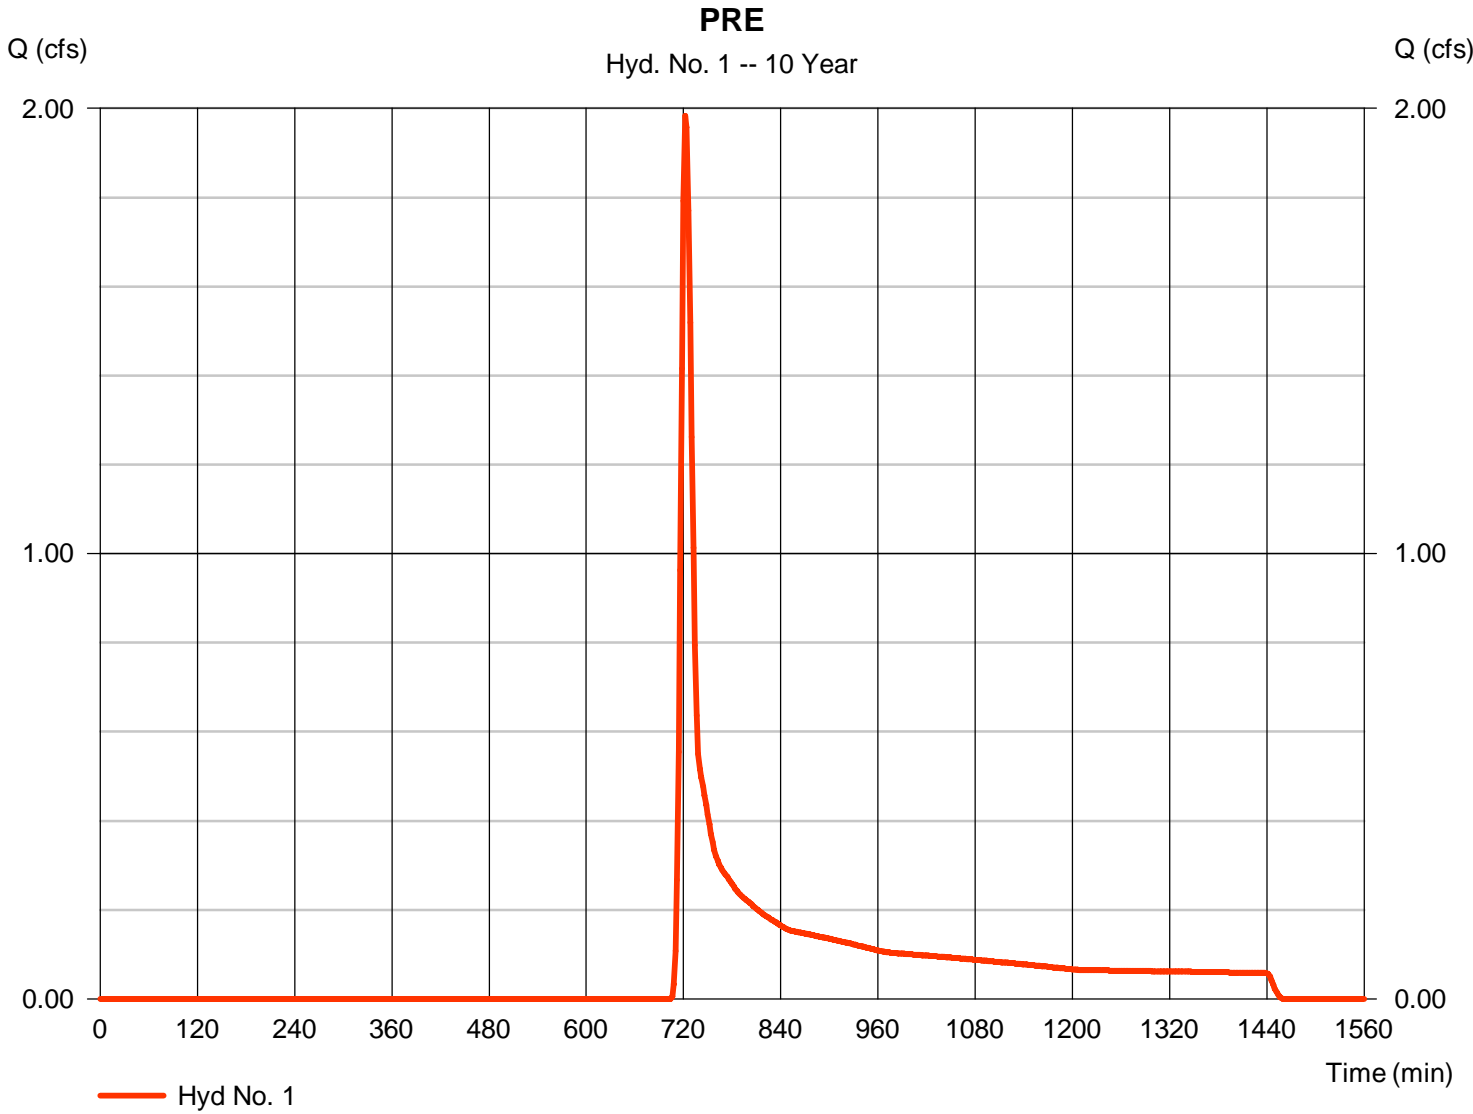

# TR55 Tc Worksheet

Hydraflow Hydrographs Extension for AutoCAD® Civil 3D® 2015 by Autodesk, Inc. v10.4

## Hyd. No. 1

PRE

<u>Description</u>	<u>A</u>	<u>B</u>	<u>C</u>	<u>Totals</u>
<b>Sheet Flow</b>				
Manning's n-value	= 0.240	0.011	0.011	
Flow length (ft)	= 50.0	0.0	0.0	
Two-year 24-hr precip. (in)	= 2.67	0.00	0.00	
Land slope (%)	= 2.50	0.00	0.00	
<b>Travel Time (min)</b>	<b>= 8.21</b>	<b>+ 0.00</b>	<b>+ 0.00</b>	<b>= 8.21</b>
<b>Shallow Concentrated Flow</b>				
Flow length (ft)	= 913.00	0.00	0.00	
Watercourse slope (%)	= 4.80	0.00	0.00	
Surface description	= Unpaved	Paved	Paved	
Average velocity (ft/s)	=3.53	0.00	0.00	
<b>Travel Time (min)</b>	<b>= 4.30</b>	<b>+ 0.00</b>	<b>+ 0.00</b>	<b>= 4.30</b>
<b>Channel Flow</b>				
X sectional flow area (sqft)	= 0.00	0.00	0.00	
Wetted perimeter (ft)	= 0.00	0.00	0.00	
Channel slope (%)	= 0.00	0.00	0.00	
Manning's n-value	= 0.015	0.015	0.015	
Velocity (ft/s)	=0.00	0.00	0.00	
Flow length (ft)	0.0	0.0	0.0	
<b>Travel Time (min)</b>	<b>= 0.00</b>	<b>+ 0.00</b>	<b>+ 0.00</b>	<b>= 0.00</b>
<b>Total Travel Time, Tc .....</b>				<b>12.50 min</b>

# Hydrograph Report

Hydraflow Hydrographs Extension for AutoCAD® Civil 3D® 2015 by Autodesk, Inc. v10.4


Tuesday, 11 / 1 / 2016

## Hyd. No. 2

### POST UNDETAINED

Hydrograph type	= SCS Runoff	Peak discharge	= 1.142 cfs
Storm frequency	= 10 yrs	Time to peak	= 722 min
Time interval	= 2 min	Hyd. volume	= 3,885 cuft
Drainage area	= 1.710 ac	Curve number	= 58*
Basin Slope	= 0.0 %	Hydraulic length	= 0 ft
Tc method	= TR55	Time of conc. (Tc)	= 11.10 min
Total precip.	= 3.87 in	Distribution	= Type II
Storm duration	= 24 hrs	Shape factor	= 484

\* Composite (Area/CN) = [(1.700 x 58) + (0.010 x 85)] / 1.710

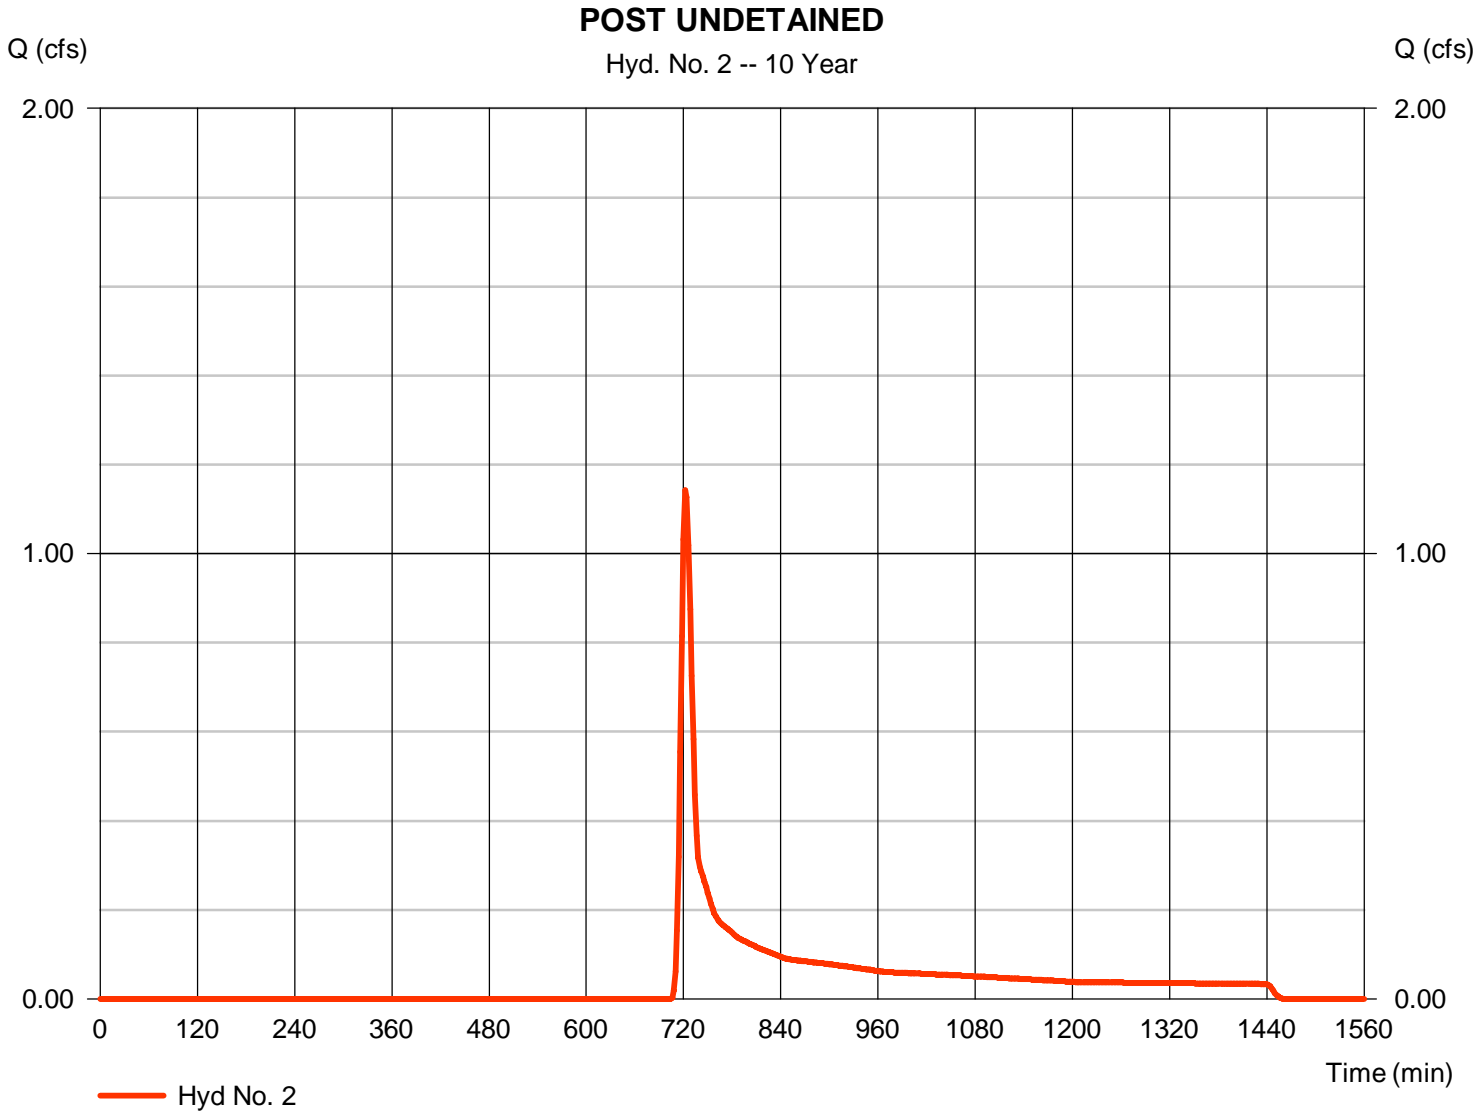

# TR55 Tc Worksheet

Hydraflow Hydrographs Extension for AutoCAD® Civil 3D® 2015 by Autodesk, Inc. v10.4

## Hyd. No. 2

POST UNDETAINED

<u>Description</u>	<u>A</u>	<u>B</u>	<u>C</u>	<u>Totals</u>
<b>Sheet Flow</b>				
Manning's n-value	= 0.240	0.011	0.011	
Flow length (ft)	= 50.0	0.0	0.0	
Two-year 24-hr precip. (in)	= 2.67	0.00	0.00	
Land slope (%)	= 4.00	0.00	0.00	
<b>Travel Time (min)</b>	<b>= 6.80</b>	<b>+</b> <b>0.00</b>	<b>+</b> <b>0.00</b>	<b>= 6.80</b>
<b>Shallow Concentrated Flow</b>				
Flow length (ft)	= 672.00	60.00	133.00	
Watercourse slope (%)	= 4.30	4.00	8.30	
Surface description	= Unpaved	Paved	Unpaved	
Average velocity (ft/s)	=3.35	4.07	4.65	
<b>Travel Time (min)</b>	<b>= 3.35</b>	<b>+</b> <b>0.25</b>	<b>+</b> <b>0.48</b>	<b>= 4.07</b>
<b>Channel Flow</b>				
X sectional flow area (sqft)	= 2.00	0.00	0.00	
Wetted perimeter (ft)	= 4.47	0.00	0.00	
Channel slope (%)	= 2.10	0.00	0.00	
Manning's n-value	= 0.015	0.015	0.015	
Velocity (ft/s)	=8.40	0.00	0.00	
Flow length (ft)	{{0}}96.0	0.0	0.0	
<b>Travel Time (min)</b>	<b>= 0.19</b>	<b>+</b> <b>0.00</b>	<b>+</b> <b>0.00</b>	<b>= 0.19</b>
<b>Total Travel Time, Tc .....</b>				<b>11.10 min</b>




# Hydrograph Report

## Hyd. No. 3

### POST DETAINED

Hydrograph type	= SCS Runoff	Peak discharge	= 0.456 cfs
Storm frequency	= 10 yrs	Time to peak	= 746 min
Time interval	= 2 min	Hyd. volume	= 3,418 cuft
Drainage area	= 1.260 ac	Curve number	= 61*
Basin Slope	= 0.0 %	Hydraulic length	= 0 ft
Tc method	= User	Time of conc. (Tc)	= 50.59 min
Total precip.	= 3.87 in	Distribution	= Type II
Storm duration	= 24 hrs	Shape factor	= 484

\* Composite (Area/CN) = [(0.137 x 85) + (1.123 x 58)] / 1.260

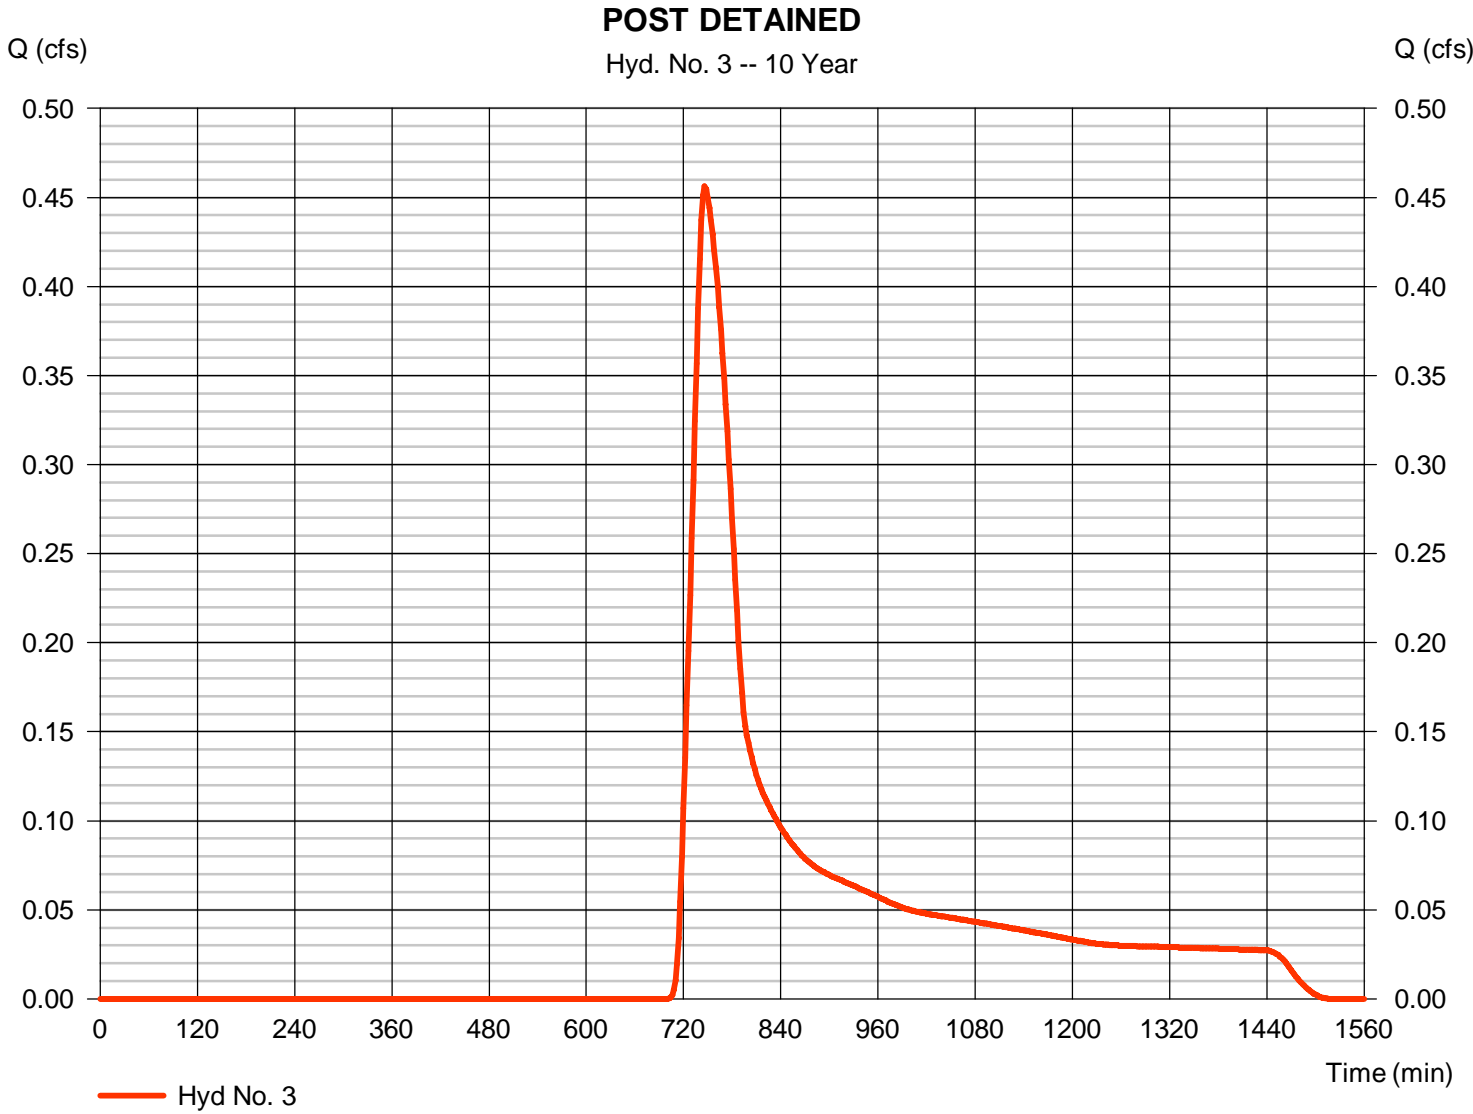

# Hydrograph Report


Hydraflow Hydrographs Extension for AutoCAD® Civil 3D® 2015 by Autodesk, Inc. v10.4

Tuesday, 11 / 1 / 2016

## Hyd. No. 4

### VOLUME ABSTRACTION

Hydrograph type	= Diversion1	Peak discharge	= 0.456 cfs
Storm frequency	= 10 yrs	Time to peak	= 746 min
Time interval	= 2 min	Hyd. volume	= 2,701 cuft
Inflow hydrograph	= 3 - POST DETAINED	2nd diverted hyd.	= 5
Diversion method	= First Flush Volume	Volume Up To	= 2,700 cuft

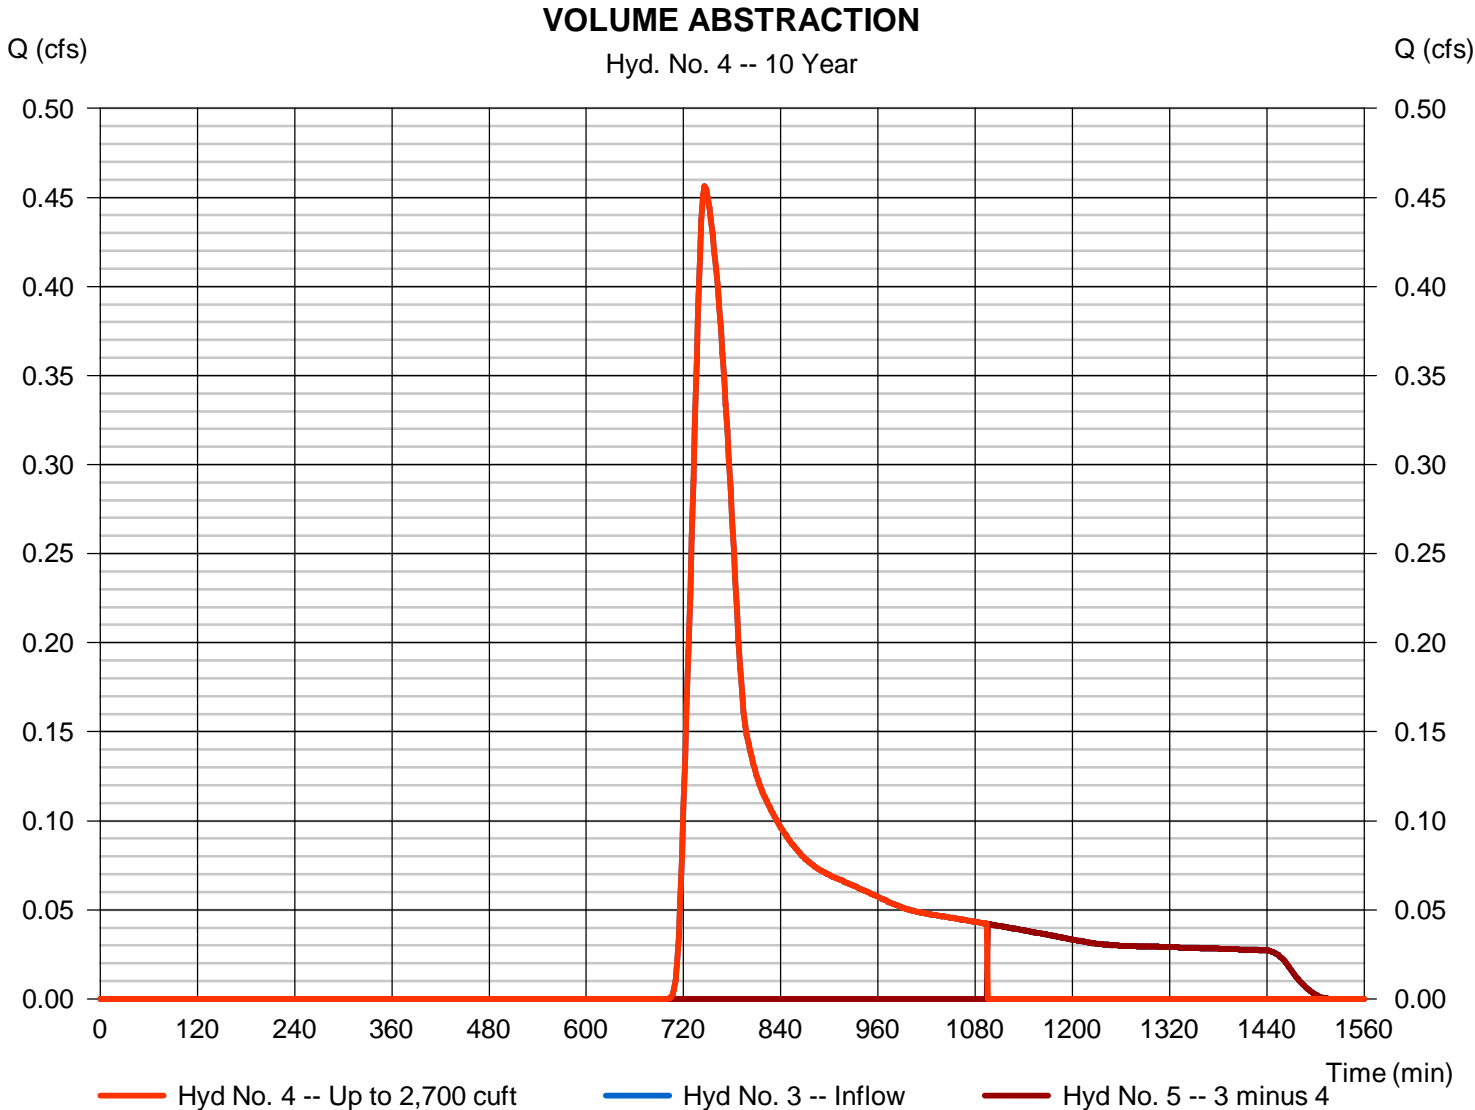

# Hydrograph Report


Hydraflow Hydrographs Extension for AutoCAD® Civil 3D® 2015 by Autodesk, Inc. v10.4

Tuesday, 11 / 1 / 2016

## Hyd. No. 5

### POST AFTER BMP

Hydrograph type	= Diversion2	Peak discharge	= 0.042 cfs
Storm frequency	= 10 yrs	Time to peak	= 1096 min
Time interval	= 2 min	Hyd. volume	= 717 cuft
Inflow hydrograph	= 3 - POST DETAINED	2nd diverted hyd.	= 4
Diversion method	= First Flush Volume	Volume Up To	= 2,700 cuft

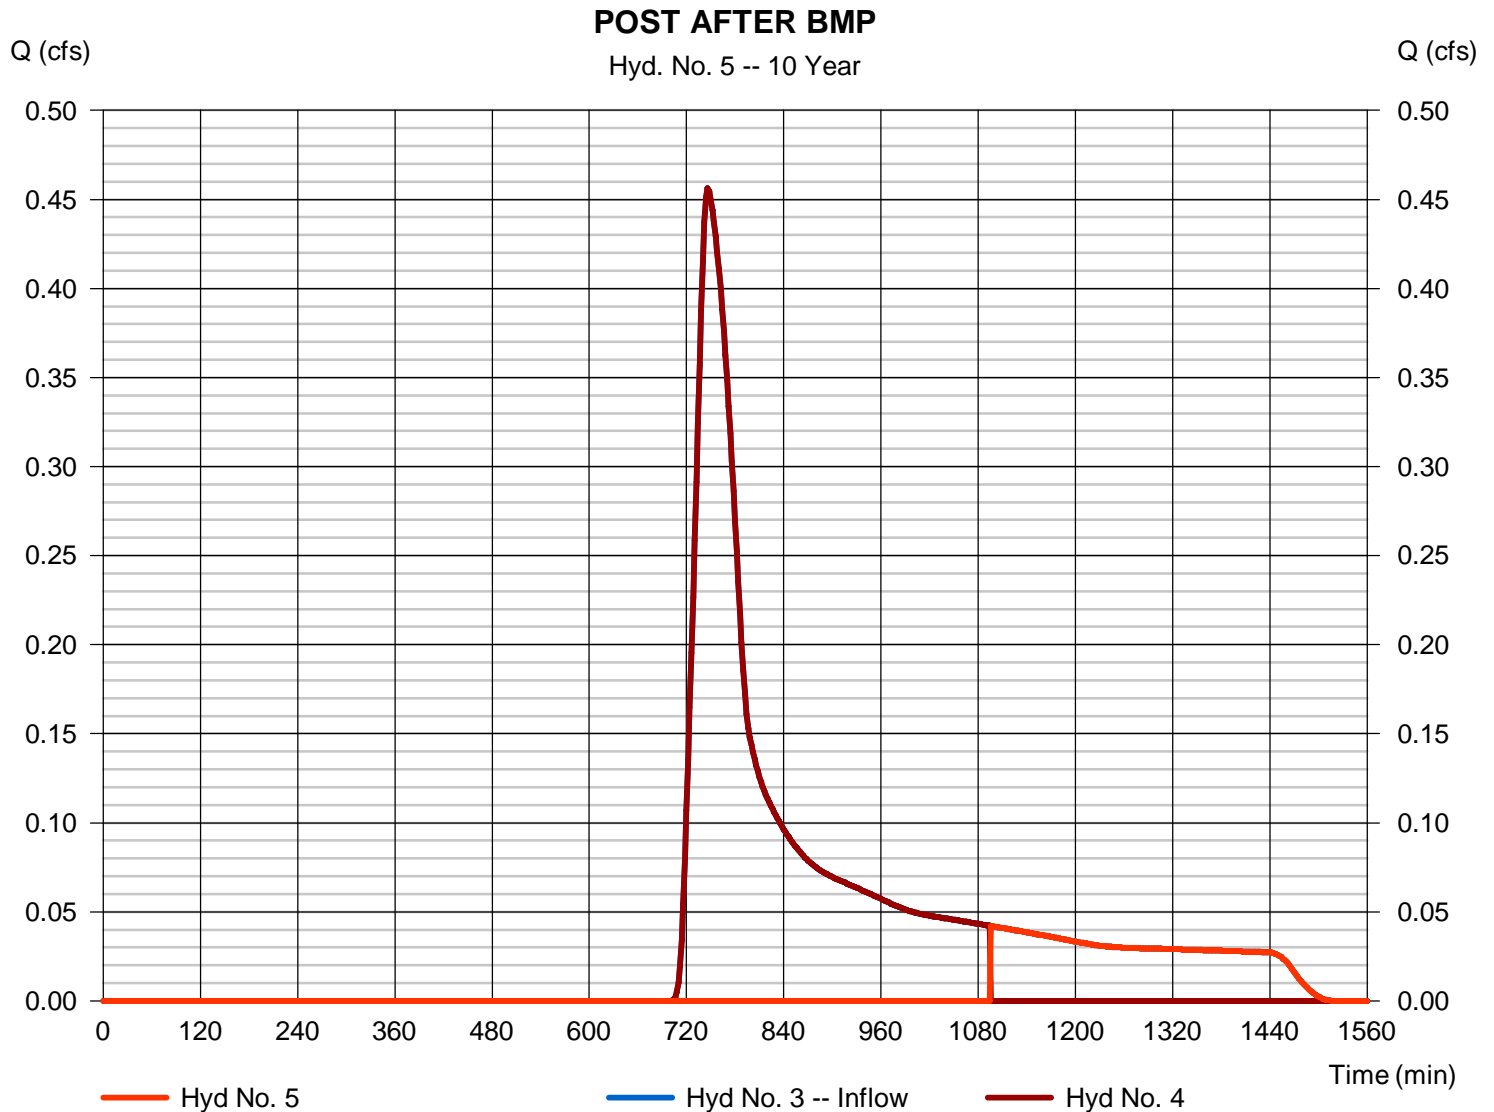

# Hydrograph Report

Hydraflow Hydrographs Extension for AutoCAD® Civil 3D® 2015 by Autodesk, Inc. v10.4


Tuesday, 11 / 1 / 2016

## Hyd. No. 6

POST AT POI

Hydrograph type = Combine  
Storm frequency = 10 yrs  
Time interval = 2 min  
Inflow hyds. = 2, 5


Peak discharge = 1.142 cfs  
Time to peak = 722 min  
Hyd. volume = 4,602 cuft  
Contrib. drain. area = 1.710 ac

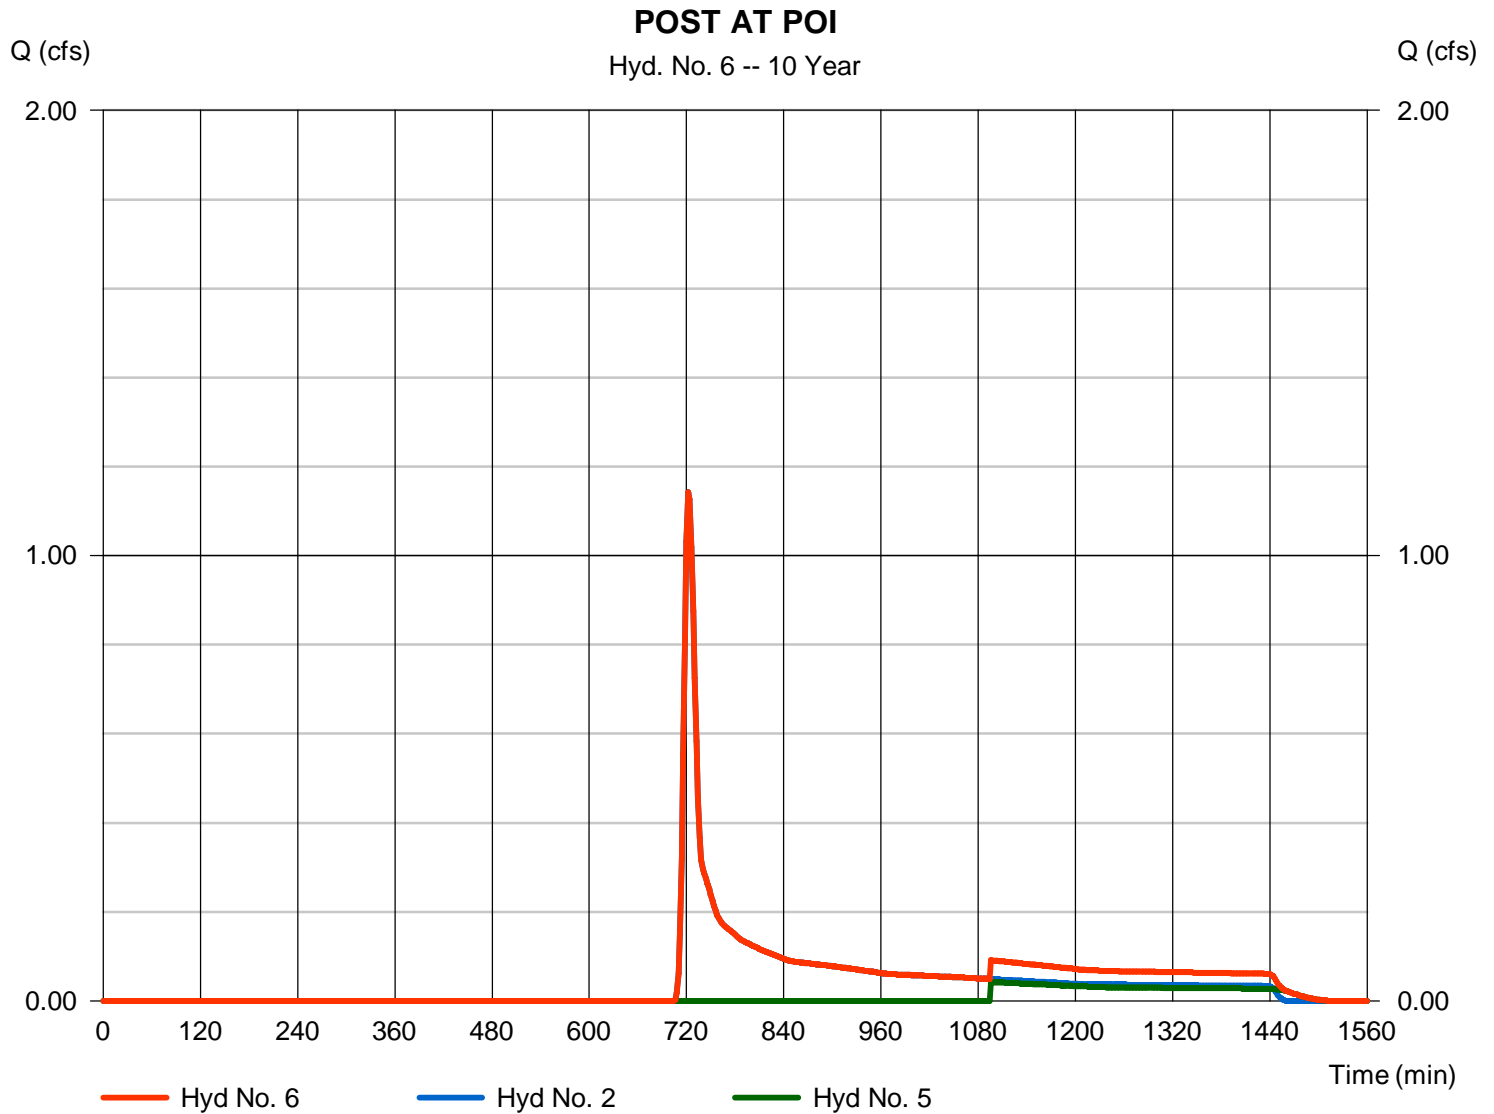



# Watershed Model Schematic

Hydraflow Hydrographs Extension for AutoCAD® Civil 3D® 2015 by Autodesk, Inc. v10.4

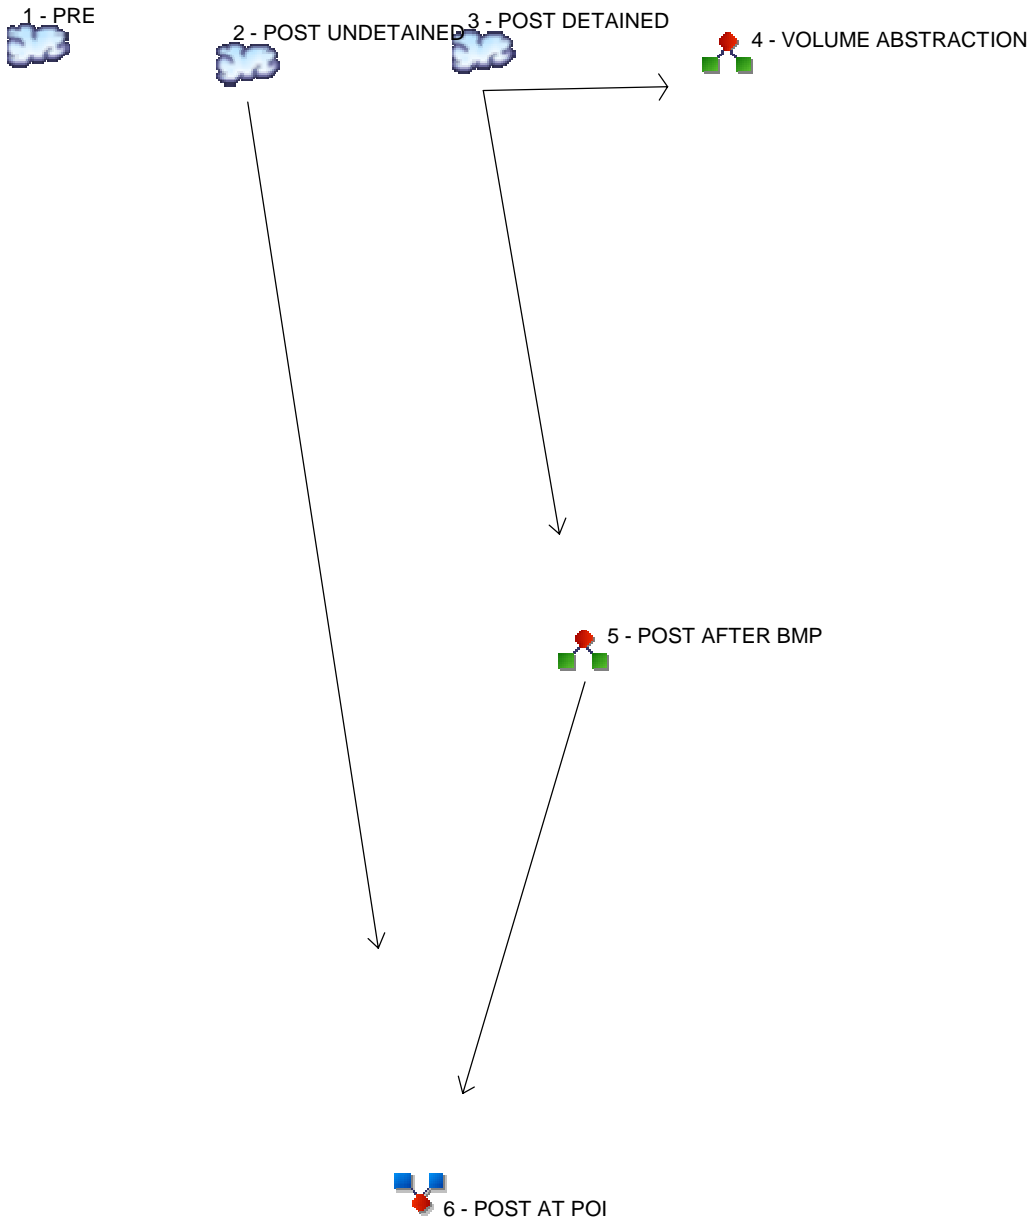

**Legend**

Hyd. Origin	Description
1 SCS Runoff	PRE
2 SCS Runoff	POST UNDETAINED
3 SCS Runoff	POST DETAINED
4 Diversion1	VOLUME ABSTRACTION
5 Diversion2	POST AFTER BMP
6 Combine	POST AT POI

# Hydrograph Return Period Recap

Hydroflow Hydrographs Extension for AutoCAD® Civil 3D® 2015 by Autodesk, Inc. v10.4

Hyd. No.	Hydrograph type (origin)	Inflow hyd(s)	Peak Outflow (cfs)								Hydrograph Description
			1-yr	2-yr	3-yr	5-yr	10-yr	25-yr	50-yr	100-yr	
1	SCS Runoff	-----	-----	-----	-----	-----	-----	-----	5.319	-----	PRE
2	SCS Runoff	-----	-----	-----	-----	-----	-----	-----	3.063	-----	POST UNDETAINED
3	SCS Runoff	-----	-----	-----	-----	-----	-----	-----	1.623	-----	POST DETAINED
4	Diversion1	3	-----	-----	-----	-----	-----	-----	1.623	-----	VOLUME ABSTRACTION
5	Diversion2	3	-----	-----	-----	-----	-----	-----	0.915	-----	POST AFTER BMP
6	Combine	2, 5	-----	-----	-----	-----	-----	-----	3.063	-----	POST AT POI

# Hydrograph Summary Report

Hydraflow Hydrographs Extension for AutoCAD® Civil 3D® 2015 by Autodesk, Inc. v10.4

Hyd. No.	Hydrograph type (origin)	Peak flow (cfs)	Time interval (min)	Time to Peak (min)	Hyd. volume (cuft)	Inflow hyd(s)	Maximum elevation (ft)	Total strge used (cuft)	Hydrograph Description
1	SCS Runoff	5.319	2	722	14,869	-----	-----	-----	PRE
2	SCS Runoff	3.063	2	722	8,561	-----	-----	-----	POST UNDETAINED
3	SCS Runoff	1.623	2	732	7,102	-----	-----	-----	POST DETAINED
4	Diversion1	1.623	2	732	2,739	3	-----	-----	VOLUME ABSTRACTION
5	Diversion2	0.915	2	750	4,363	3	-----	-----	POST AFTER BMP
6	Combine	3.063	2	722	12,924	2, 5	-----	-----	POST AT POI



# Hydrograph Report

Hydraflow Hydrographs Extension for AutoCAD® Civil 3D® 2015 by Autodesk, Inc. v10.4


Tuesday, 11 / 1 / 2016

## Hyd. No. 1

PRE

Hydrograph type	= SCS Runoff	Peak discharge	= 5.319 cfs
Storm frequency	= 50 yrs	Time to peak	= 722 min
Time interval	= 2 min	Hyd. volume	= 14,869 cuft
Drainage area	= 2.970 ac	Curve number	= 58*
Basin Slope	= 0.0 %	Hydraulic length	= 0 ft
Tc method	= TR55	Time of conc. (Tc)	= 12.50 min
Total precip.	= 5.30 in	Distribution	= Type II
Storm duration	= 24 hrs	Shape factor	= 484

\* Composite (Area/CN) = [(2.966 x 58)] / 2.970

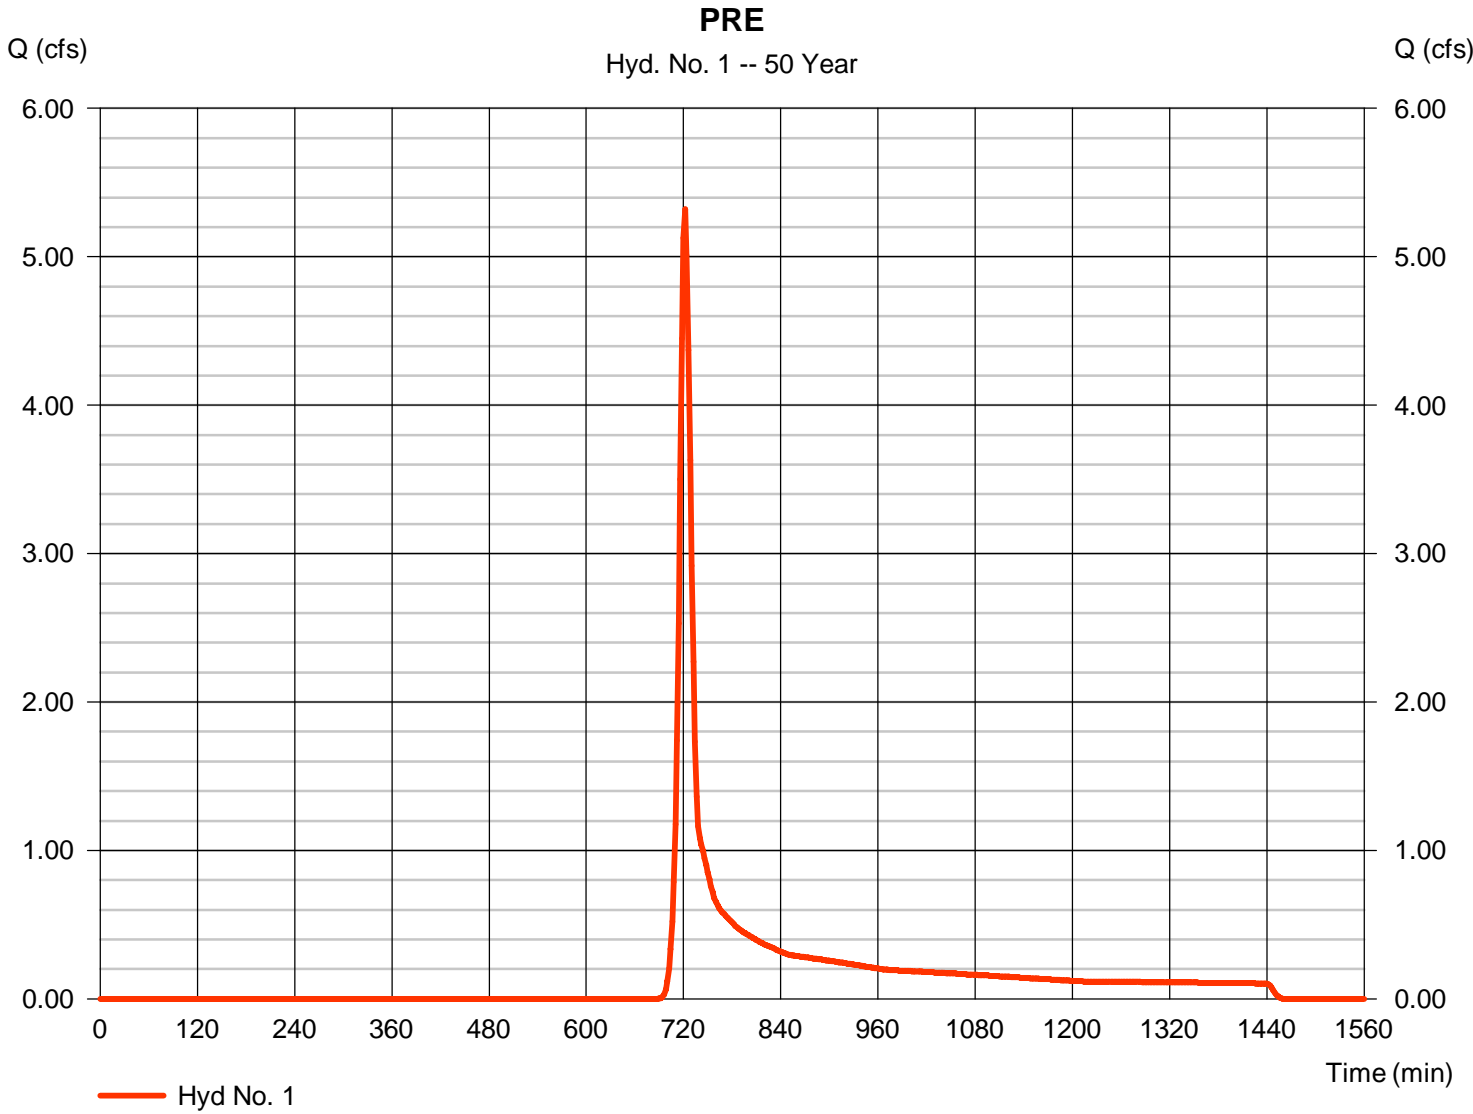

# TR55 Tc Worksheet

Hydraflow Hydrographs Extension for AutoCAD® Civil 3D® 2015 by Autodesk, Inc. v10.4

## Hyd. No. 1

PRE

<u>Description</u>	<u>A</u>	<u>B</u>	<u>C</u>	<u>Totals</u>
<b>Sheet Flow</b>				
Manning's n-value	= 0.240	0.011	0.011	
Flow length (ft)	= 50.0	0.0	0.0	
Two-year 24-hr precip. (in)	= 2.67	0.00	0.00	
Land slope (%)	= 2.50	0.00	0.00	
<b>Travel Time (min)</b>	<b>= 8.21</b>	<b>+ 0.00</b>	<b>+ 0.00</b>	<b>= 8.21</b>
<b>Shallow Concentrated Flow</b>				
Flow length (ft)	= 913.00	0.00	0.00	
Watercourse slope (%)	= 4.80	0.00	0.00	
Surface description	= Unpaved	Paved	Paved	
Average velocity (ft/s)	=3.53	0.00	0.00	
<b>Travel Time (min)</b>	<b>= 4.30</b>	<b>+ 0.00</b>	<b>+ 0.00</b>	<b>= 4.30</b>
<b>Channel Flow</b>				
X sectional flow area (sqft)	= 0.00	0.00	0.00	
Wetted perimeter (ft)	= 0.00	0.00	0.00	
Channel slope (%)	= 0.00	0.00	0.00	
Manning's n-value	= 0.015	0.015	0.015	
Velocity (ft/s)	=0.00	0.00	0.00	
Flow length (ft)	({0})0.0	0.0	0.0	
<b>Travel Time (min)</b>	<b>= 0.00</b>	<b>+ 0.00</b>	<b>+ 0.00</b>	<b>= 0.00</b>
<b>Total Travel Time, Tc .....</b>				<b>12.50 min</b>

# Hydrograph Report

Hydraflow Hydrographs Extension for AutoCAD® Civil 3D® 2015 by Autodesk, Inc. v10.4


Tuesday, 11 / 1 / 2016

## Hyd. No. 2

### POST UNDETAINED

Hydrograph type	= SCS Runoff	Peak discharge	= 3.063 cfs
Storm frequency	= 50 yrs	Time to peak	= 722 min
Time interval	= 2 min	Hyd. volume	= 8,561 cuft
Drainage area	= 1.710 ac	Curve number	= 58*
Basin Slope	= 0.0 %	Hydraulic length	= 0 ft
Tc method	= TR55	Time of conc. (Tc)	= 11.10 min
Total precip.	= 5.30 in	Distribution	= Type II
Storm duration	= 24 hrs	Shape factor	= 484

\* Composite (Area/CN) =  $[(1.700 \times 58) + (0.010 \times 85)] / 1.710$

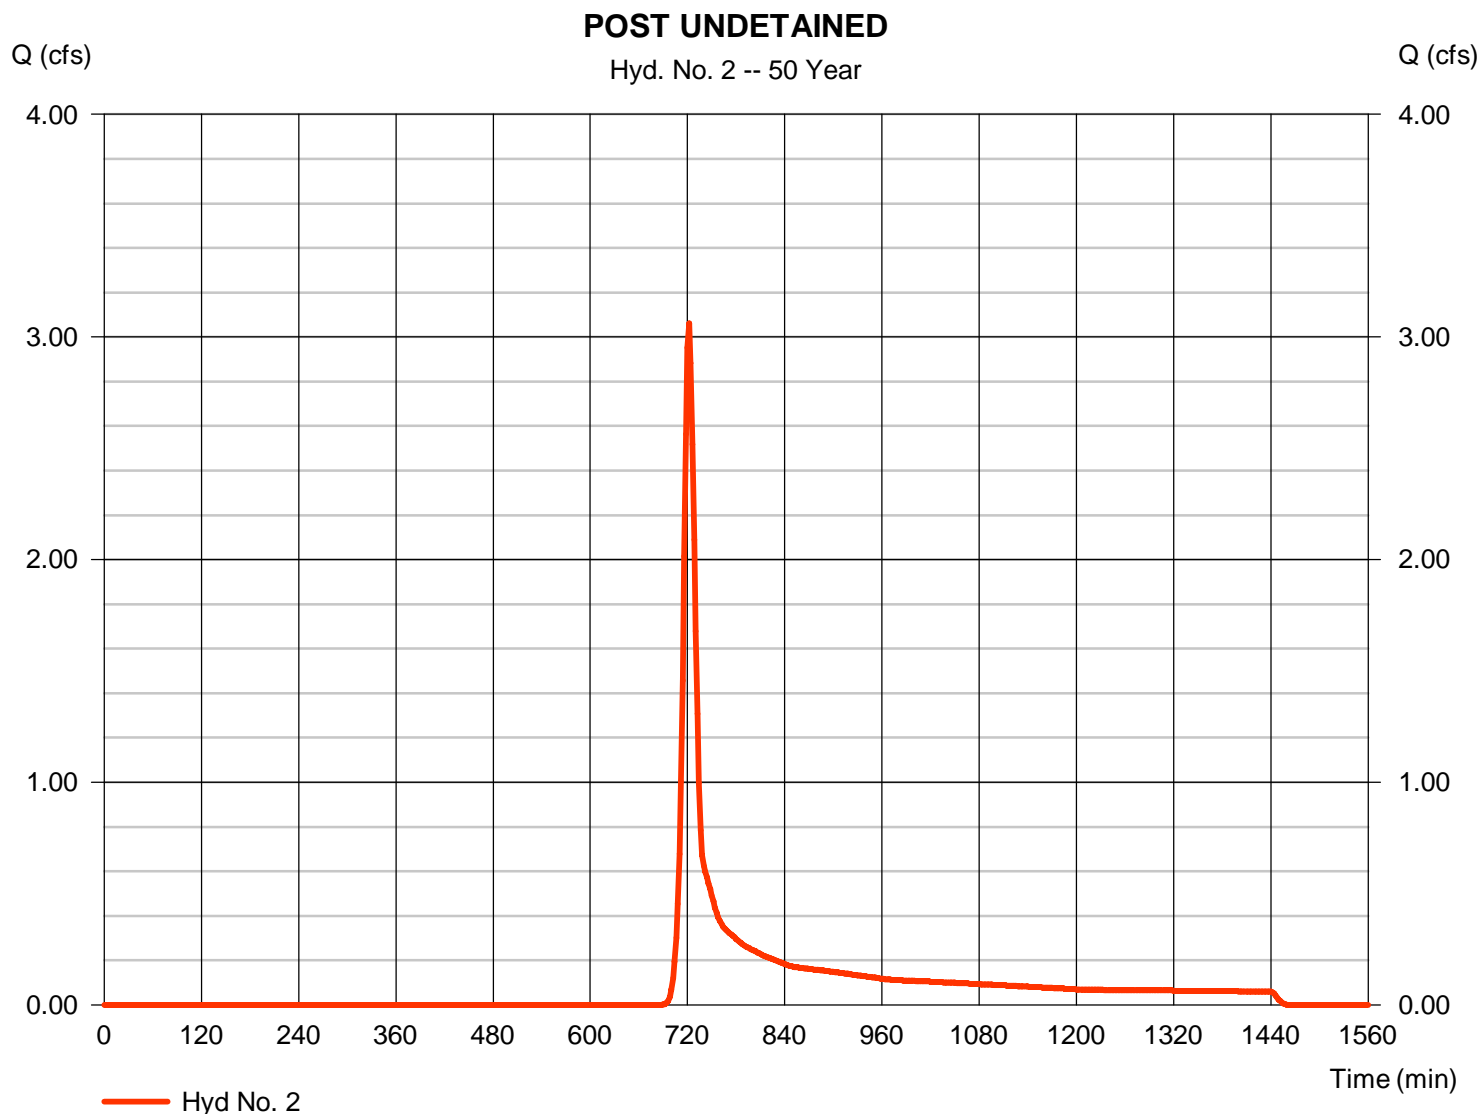

# TR55 Tc Worksheet

Hydraflow Hydrographs Extension for AutoCAD® Civil 3D® 2015 by Autodesk, Inc. v10.4

## Hyd. No. 2

POST UNDETAINED

<u>Description</u>	<u>A</u>		<u>B</u>		<u>C</u>		<u>Totals</u>
<b>Sheet Flow</b>							
Manning's n-value	= 0.240		0.011		0.011		
Flow length (ft)	= 50.0		0.0		0.0		
Two-year 24-hr precip. (in)	= 2.67		0.00		0.00		
Land slope (%)	= 4.00		0.00		0.00		
<b>Travel Time (min)</b>	<b>= 6.80</b>	<b>+</b>	<b>0.00</b>	<b>+</b>	<b>0.00</b>	<b>=</b>	<b>6.80</b>
<b>Shallow Concentrated Flow</b>							
Flow length (ft)	= 672.00		60.00		133.00		
Watercourse slope (%)	= 4.30		4.00		8.30		
Surface description	= Unpaved		Paved		Unpaved		
Average velocity (ft/s)	=3.35		4.07		4.65		
<b>Travel Time (min)</b>	<b>= 3.35</b>	<b>+</b>	<b>0.25</b>	<b>+</b>	<b>0.48</b>	<b>=</b>	<b>4.07</b>
<b>Channel Flow</b>							
X sectional flow area (sqft)	= 2.00		0.00		0.00		
Wetted perimeter (ft)	= 4.47		0.00		0.00		
Channel slope (%)	= 2.10		0.00		0.00		
Manning's n-value	= 0.015		0.015		0.015		
Velocity (ft/s)	=8.40		0.00		0.00		
Flow length (ft)	{{0}}96.0		0.0		0.0		
<b>Travel Time (min)</b>	<b>= 0.19</b>	<b>+</b>	<b>0.00</b>	<b>+</b>	<b>0.00</b>	<b>=</b>	<b>0.19</b>
<b>Total Travel Time, Tc .....</b>							<b>11.10 min</b>


# Hydrograph Report

## Hyd. No. 3

### POST DETAINED

Hydrograph type	= SCS Runoff	Peak discharge	= 1.623 cfs
Storm frequency	= 50 yrs	Time to peak	= 732 min
Time interval	= 2 min	Hyd. volume	= 7,102 cuft
Drainage area	= 1.260 ac	Curve number	= 61*
Basin Slope	= 0.0 %	Hydraulic length	= 0 ft
Tc method	= User	Time of conc. (Tc)	= 28.40 min
Total precip.	= 5.30 in	Distribution	= Type II
Storm duration	= 24 hrs	Shape factor	= 484

\* Composite (Area/CN) = [(0.137 x 85) + (1.123 x 58)] / 1.260

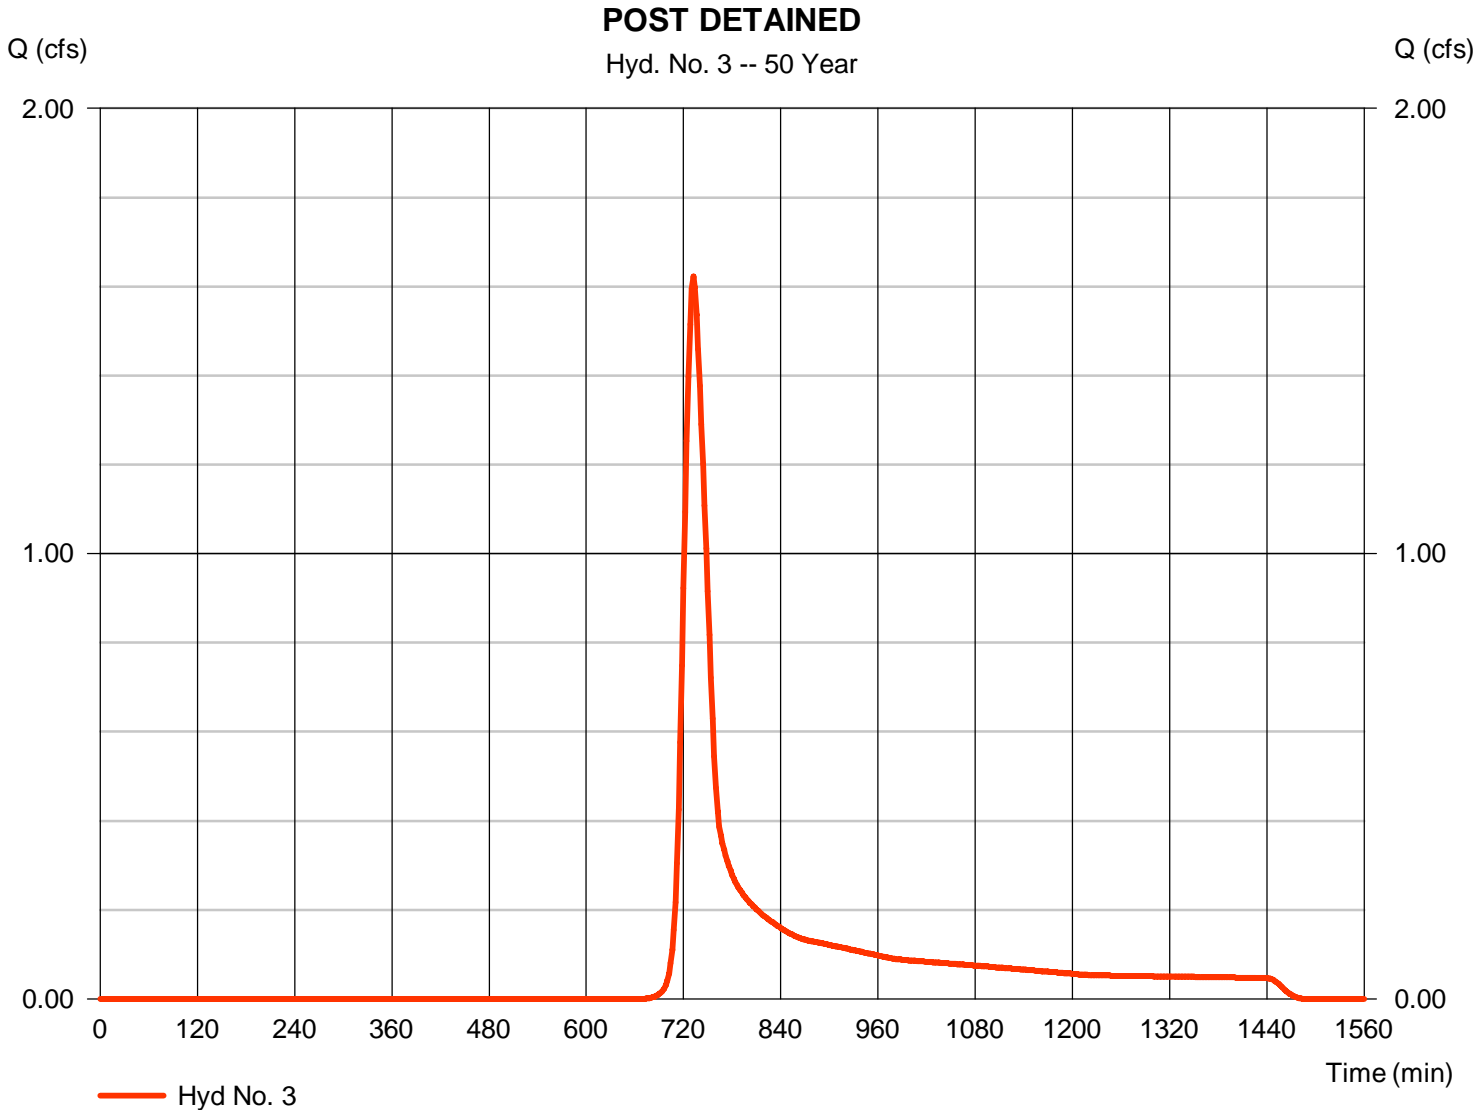

# Hydrograph Report


Hydraflow Hydrographs Extension for AutoCAD® Civil 3D® 2015 by Autodesk, Inc. v10.4

Tuesday, 11 / 1 / 2016

## Hyd. No. 4

### VOLUME ABSTRACTION

Hydrograph type	= Diversion1	Peak discharge	= 1.623 cfs
Storm frequency	= 50 yrs	Time to peak	= 732 min
Time interval	= 2 min	Hyd. volume	= 2,739 cuft
Inflow hydrograph	= 3 - POST DETAINED	2nd diverted hyd.	= 5
Diversion method	= First Flush Volume	Volume Up To	= 2,700 cuft

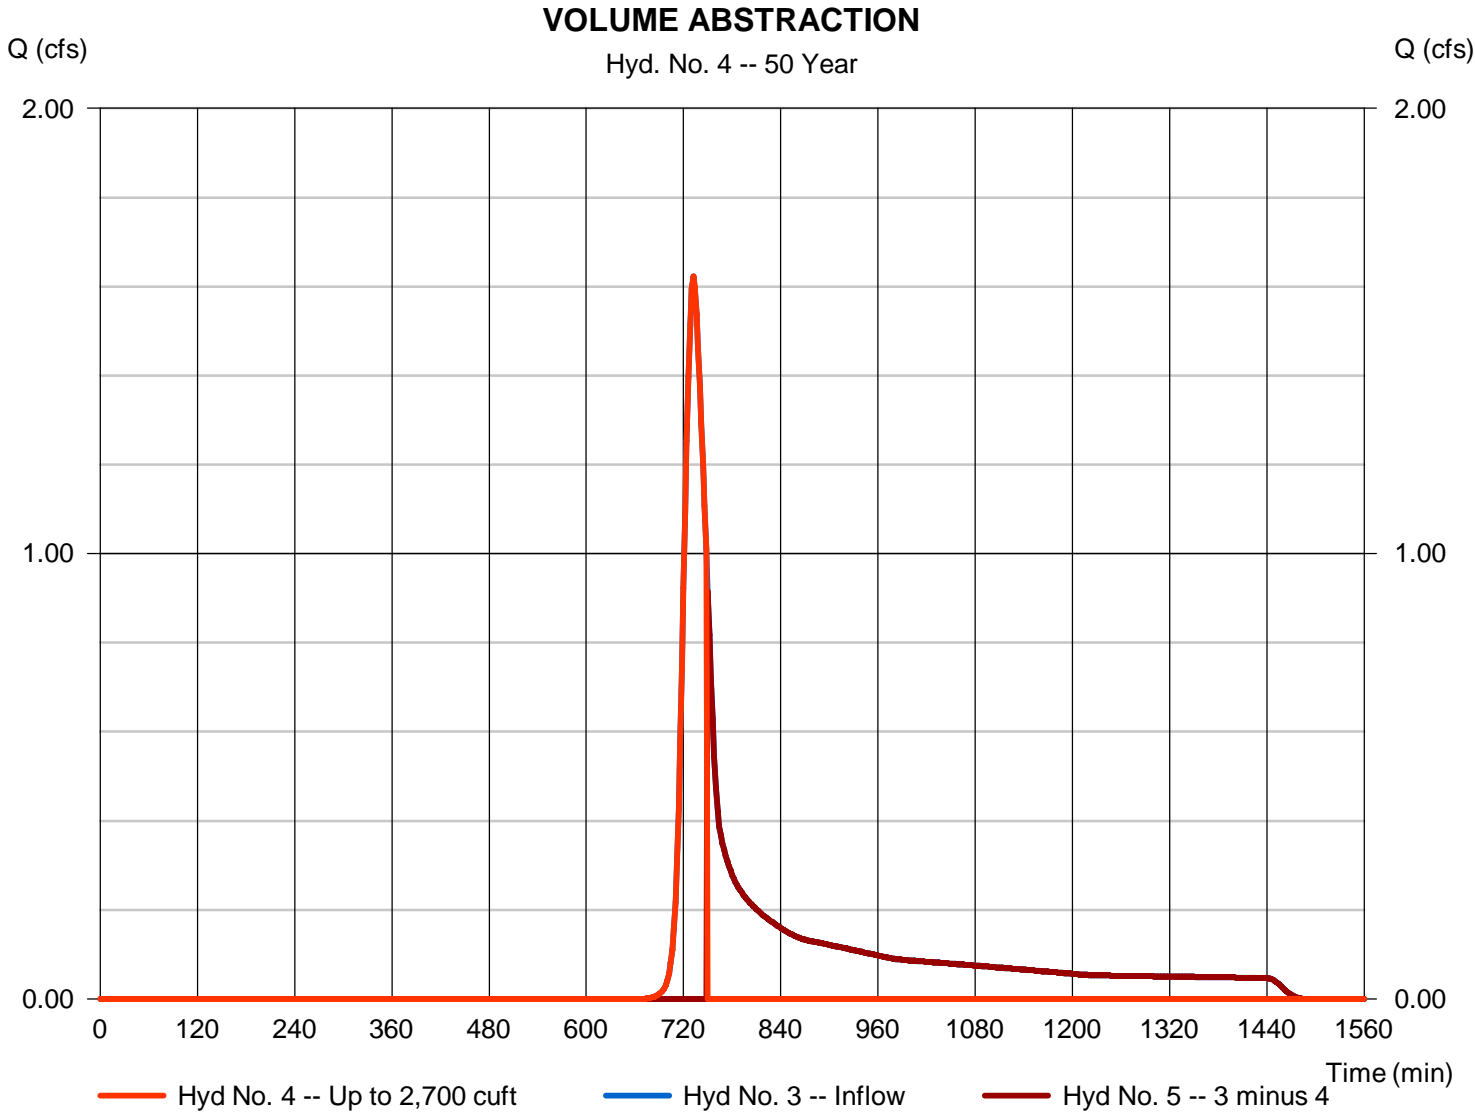

# Hydrograph Report


Hydraflow Hydrographs Extension for AutoCAD® Civil 3D® 2015 by Autodesk, Inc. v10.4

Tuesday, 11 / 1 / 2016

## Hyd. No. 5

POST AFTER BMP

Hydrograph type	= Diversion2	Peak discharge	= 0.915 cfs
Storm frequency	= 50 yrs	Time to peak	= 750 min
Time interval	= 2 min	Hyd. volume	= 4,363 cuft
Inflow hydrograph	= 3 - POST DETAINED	2nd diverted hyd.	= 4
Diversion method	= First Flush Volume	Volume Up To	= 2,700 cuft

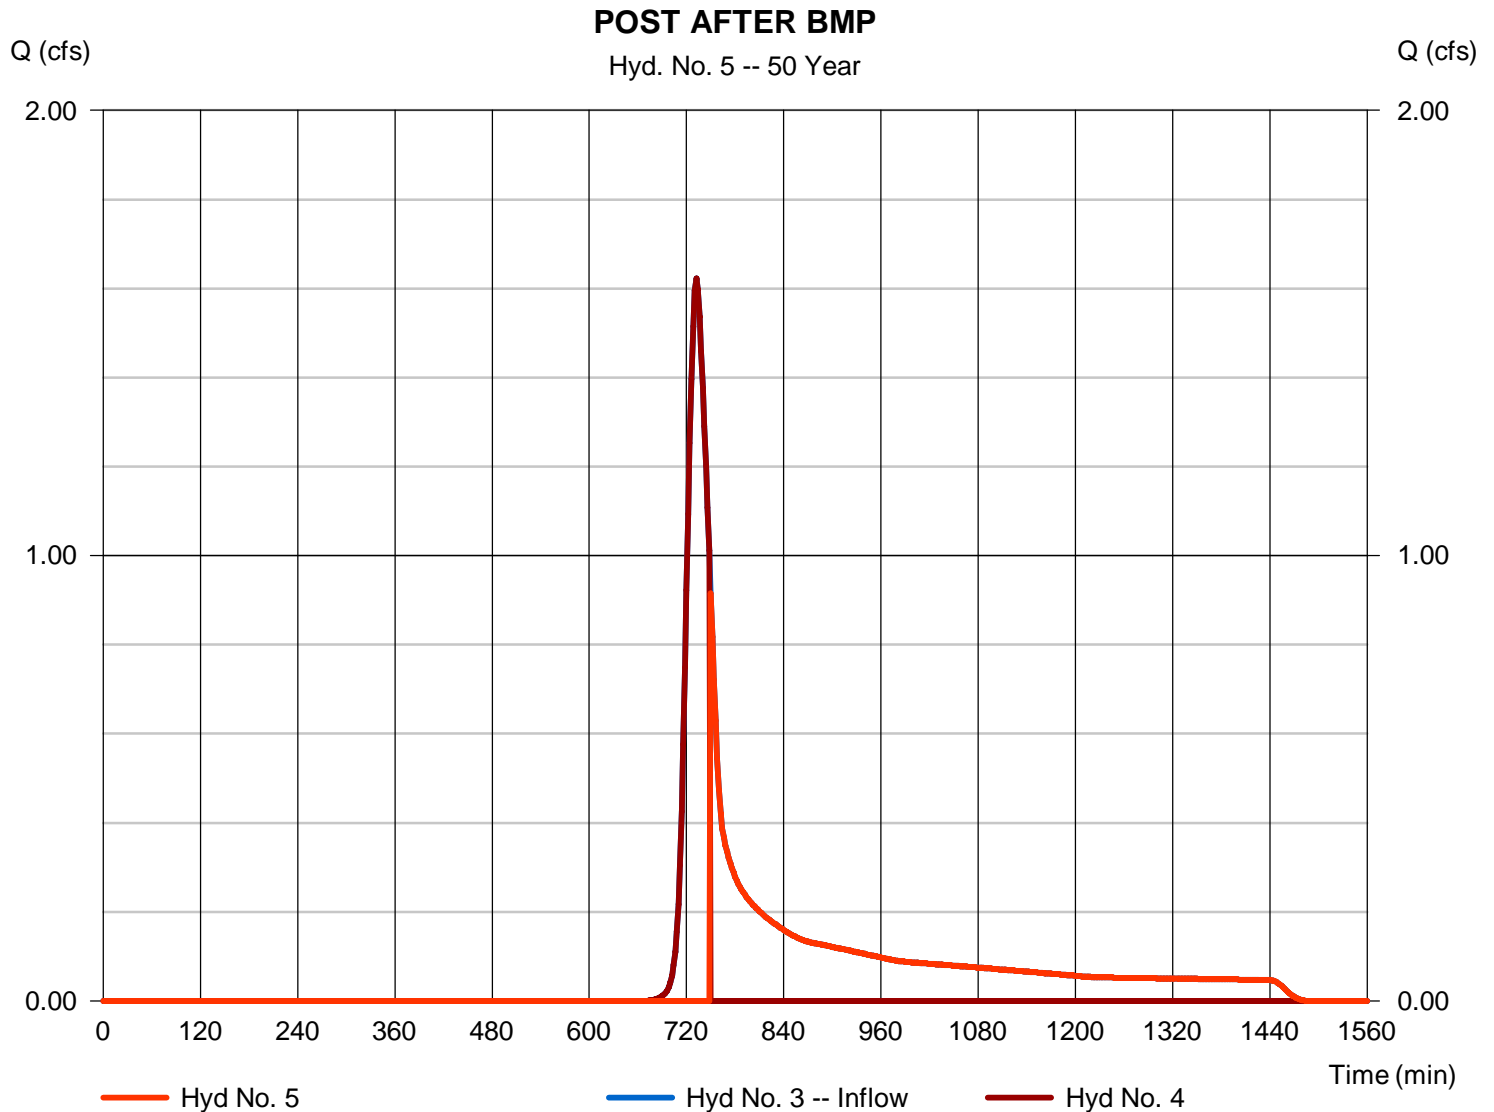

# Hydrograph Report


Hydraflow Hydrographs Extension for AutoCAD® Civil 3D® 2015 by Autodesk, Inc. v10.4

Tuesday, 11 / 1 / 2016

## Hyd. No. 6

POST AT POI

Hydrograph type	= Combine	Peak discharge	= 3.063 cfs
Storm frequency	= 50 yrs	Time to peak	= 722 min
Time interval	= 2 min	Hyd. volume	= 12,924 cuft
Inflow hyds.	= 2, 5	Contrib. drain. area	= 1.710 ac

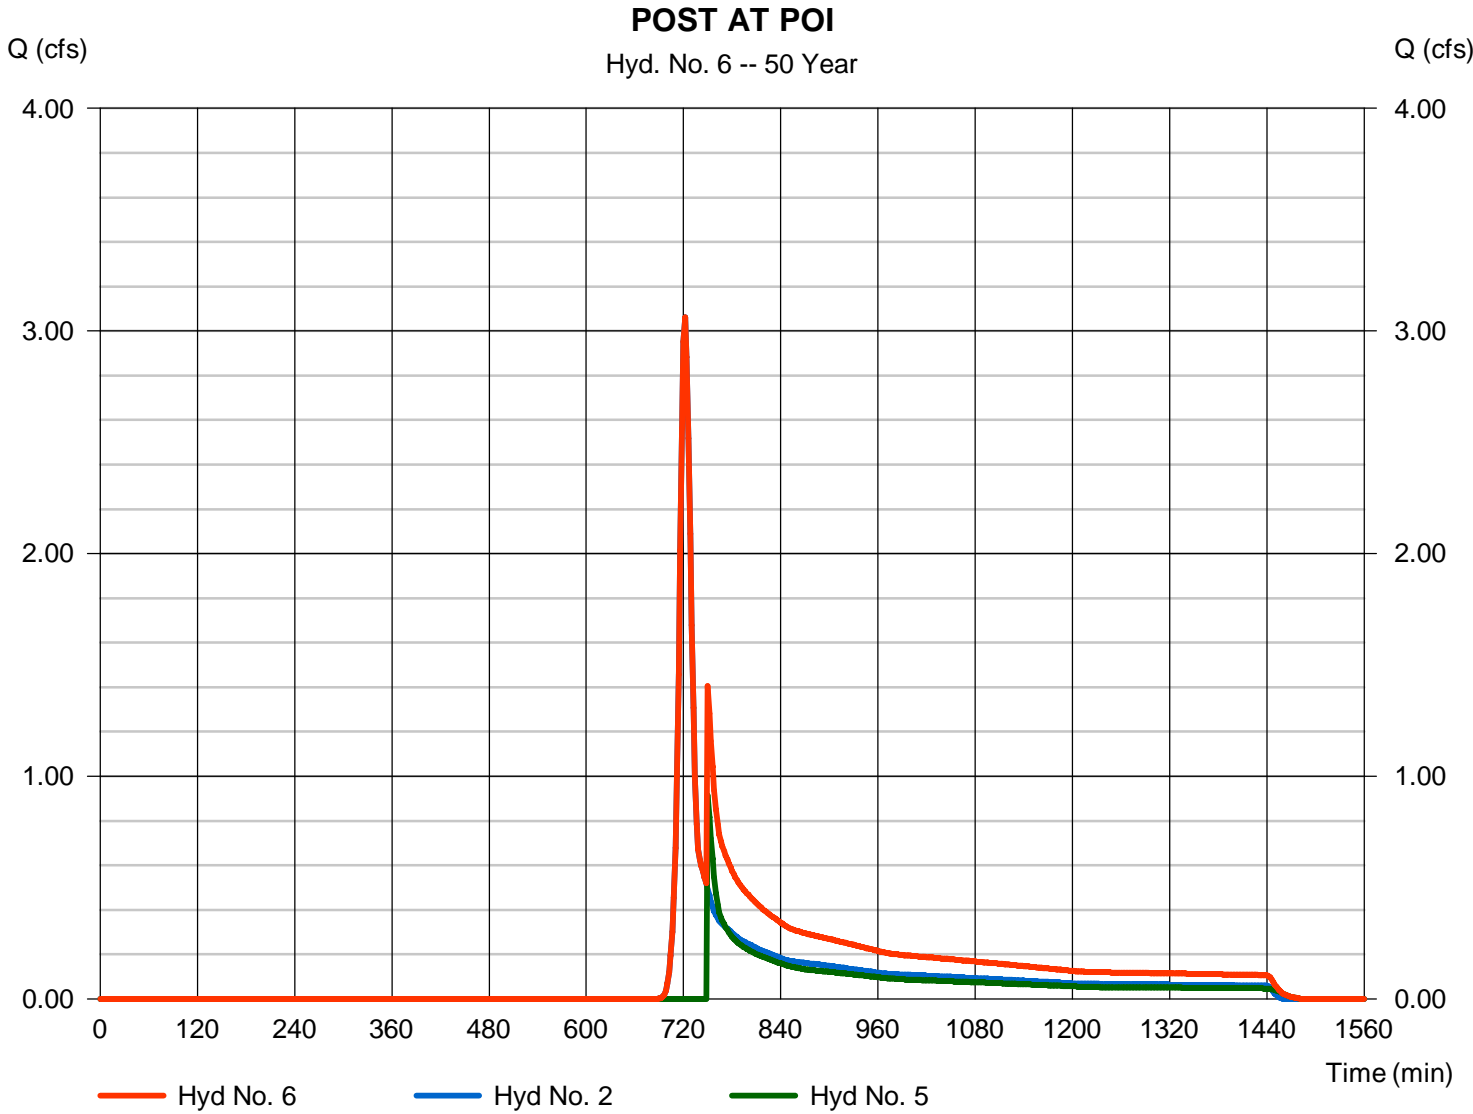






# Watershed Model Schematic

Hydraflow Hydrographs Extension for AutoCAD® Civil 3D® 2015 by Autodesk, Inc. v10.4

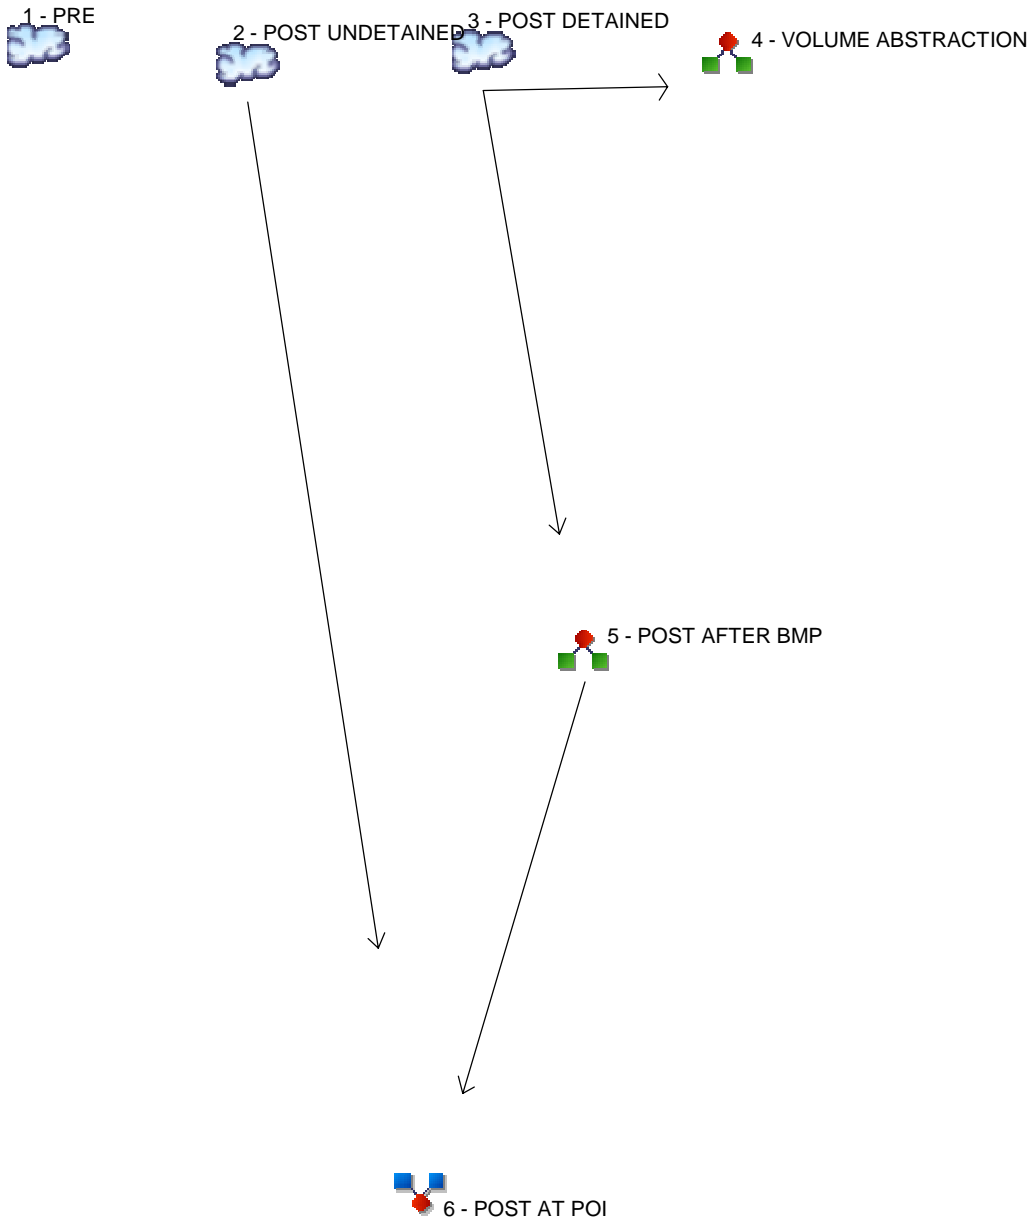

**Legend**

Hyd. Origin	Description
1 SCS Runoff	PRE
2 SCS Runoff	POST UNDETAINED
3 SCS Runoff	POST DETAINED
4 Diversion1	VOLUME ABSTRACTION
5 Diversion2	POST AFTER BMP
6 Combine	POST AT POI

# Hydrograph Return Period Recap

Hydroflow Hydrographs Extension for AutoCAD® Civil 3D® 2015 by Autodesk, Inc. v10.4

Hyd. No.	Hydrograph type (origin)	Inflow hyd(s)	Peak Outflow (cfs)								Hydrograph Description
			1-yr	2-yr	3-yr	5-yr	10-yr	25-yr	50-yr	100-yr	
1	SCS Runoff	-----	-----	-----	-----	-----	-----	-----	-----	7.172	PRE
2	SCS Runoff	-----	-----	-----	-----	-----	-----	-----	-----	4.129	POST UNDETAINED
3	SCS Runoff	-----	-----	-----	-----	-----	-----	-----	-----	2.320	POST DETAINED
4	Diversion1	3	-----	-----	-----	-----	-----	-----	-----	2.320	VOLUME ABSTRACTION
5	Diversion2	3	-----	-----	-----	-----	-----	-----	-----	1.836	POST AFTER BMP
6	Combine	2, 5	-----	-----	-----	-----	-----	-----	-----	4.129	POST AT POI

# Hydrograph Summary Report

Hydraflow Hydrographs Extension for AutoCAD® Civil 3D® 2015 by Autodesk, Inc. v10.4

Hyd. No.	Hydrograph type (origin)	Peak flow (cfs)	Time interval (min)	Time to Peak (min)	Hyd. volume (cuft)	Inflow hyd(s)	Maximum elevation (ft)	Total strge used (cuft)	Hydrograph Description
1	SCS Runoff	7.172	2	722	19,463	-----	-----	-----	PRE
2	SCS Runoff	4.129	2	722	11,206	-----	-----	-----	POST UNDETAINED
3	SCS Runoff	2.320	2	730	8,999	-----	-----	-----	POST DETAINED
4	Diversion1	2.320	2	730	2,902	3	-----	-----	VOLUME ABSTRACTION
5	Diversion2	1.836	2	738	6,097	3	-----	-----	POST AFTER BMP
6	Combine	4.129	2	722	17,303	2, 5	-----	-----	POST AT POI

# Hydrograph Report

Hydraflow Hydrographs Extension for AutoCAD® Civil 3D® 2015 by Autodesk, Inc. v10.4


Tuesday, 11 / 1 / 2016

## Hyd. No. 1

PRE

Hydrograph type	= SCS Runoff	Peak discharge	= 7.172 cfs
Storm frequency	= 100 yrs	Time to peak	= 722 min
Time interval	= 2 min	Hyd. volume	= 19,463 cuft
Drainage area	= 2.970 ac	Curve number	= 58*
Basin Slope	= 0.0 %	Hydraulic length	= 0 ft
Tc method	= TR55	Time of conc. (Tc)	= 12.50 min
Total precip.	= 5.99 in	Distribution	= Type II
Storm duration	= 24 hrs	Shape factor	= 484

\* Composite (Area/CN) = [(2.966 x 58)] / 2.970

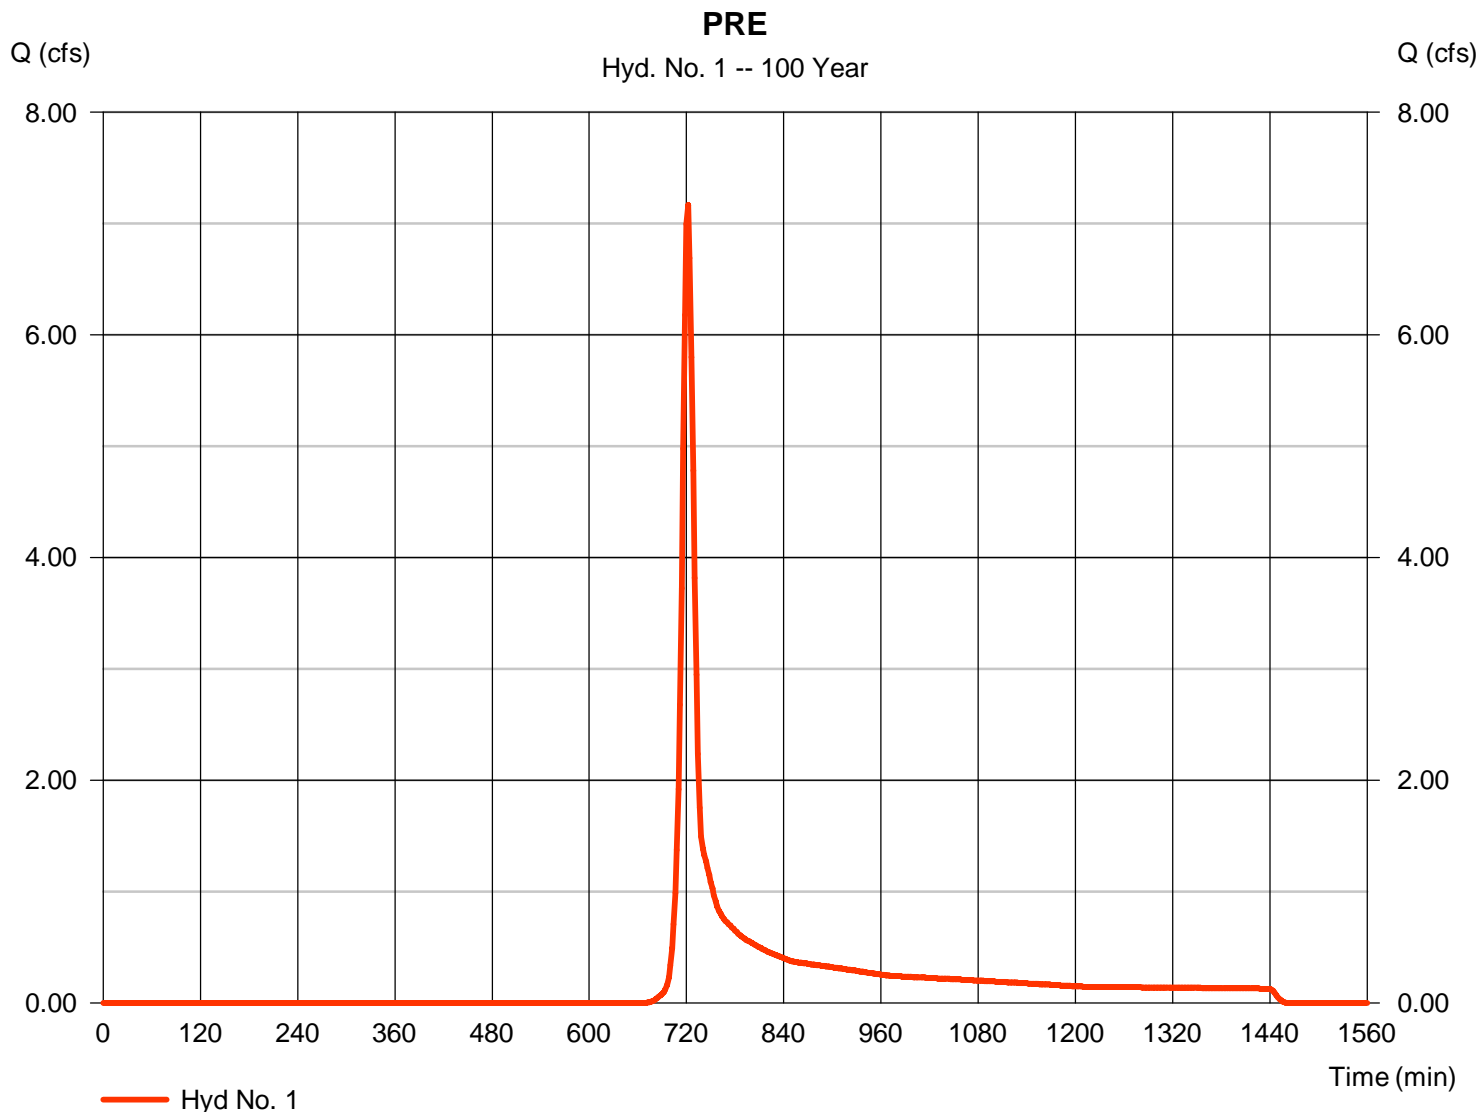

# TR55 Tc Worksheet

Hydraflow Hydrographs Extension for AutoCAD® Civil 3D® 2015 by Autodesk, Inc. v10.4

## Hyd. No. 1

PRE

<u>Description</u>	<u>A</u>	<u>B</u>	<u>C</u>	<u>Totals</u>
<b>Sheet Flow</b>				
Manning's n-value	= 0.240	0.011	0.011	
Flow length (ft)	= 50.0	0.0	0.0	
Two-year 24-hr precip. (in)	= 2.67	0.00	0.00	
Land slope (%)	= 2.50	0.00	0.00	
<b>Travel Time (min)</b>	<b>= 8.21</b>	<b>+ 0.00</b>	<b>+ 0.00</b>	<b>= 8.21</b>
<b>Shallow Concentrated Flow</b>				
Flow length (ft)	= 913.00	0.00	0.00	
Watercourse slope (%)	= 4.80	0.00	0.00	
Surface description	= Unpaved	Paved	Paved	
Average velocity (ft/s)	=3.53	0.00	0.00	
<b>Travel Time (min)</b>	<b>= 4.30</b>	<b>+ 0.00</b>	<b>+ 0.00</b>	<b>= 4.30</b>
<b>Channel Flow</b>				
X sectional flow area (sqft)	= 0.00	0.00	0.00	
Wetted perimeter (ft)	= 0.00	0.00	0.00	
Channel slope (%)	= 0.00	0.00	0.00	
Manning's n-value	= 0.015	0.015	0.015	
Velocity (ft/s)	=0.00	0.00	0.00	
Flow length (ft)	0.0	0.0	0.0	
<b>Travel Time (min)</b>	<b>= 0.00</b>	<b>+ 0.00</b>	<b>+ 0.00</b>	<b>= 0.00</b>
<b>Total Travel Time, Tc .....</b>				<b>12.50 min</b>

# Hydrograph Report

Hydraflow Hydrographs Extension for AutoCAD® Civil 3D® 2015 by Autodesk, Inc. v10.4


Tuesday, 11 / 1 / 2016

## Hyd. No. 2

### POST UNDETAINED

Hydrograph type	= SCS Runoff	Peak discharge	= 4.129 cfs
Storm frequency	= 100 yrs	Time to peak	= 722 min
Time interval	= 2 min	Hyd. volume	= 11,206 cuft
Drainage area	= 1.710 ac	Curve number	= 58*
Basin Slope	= 0.0 %	Hydraulic length	= 0 ft
Tc method	= TR55	Time of conc. (Tc)	= 11.10 min
Total precip.	= 5.99 in	Distribution	= Type II
Storm duration	= 24 hrs	Shape factor	= 484

\* Composite (Area/CN) = [(1.700 x 58) + (0.010 x 85)] / 1.710

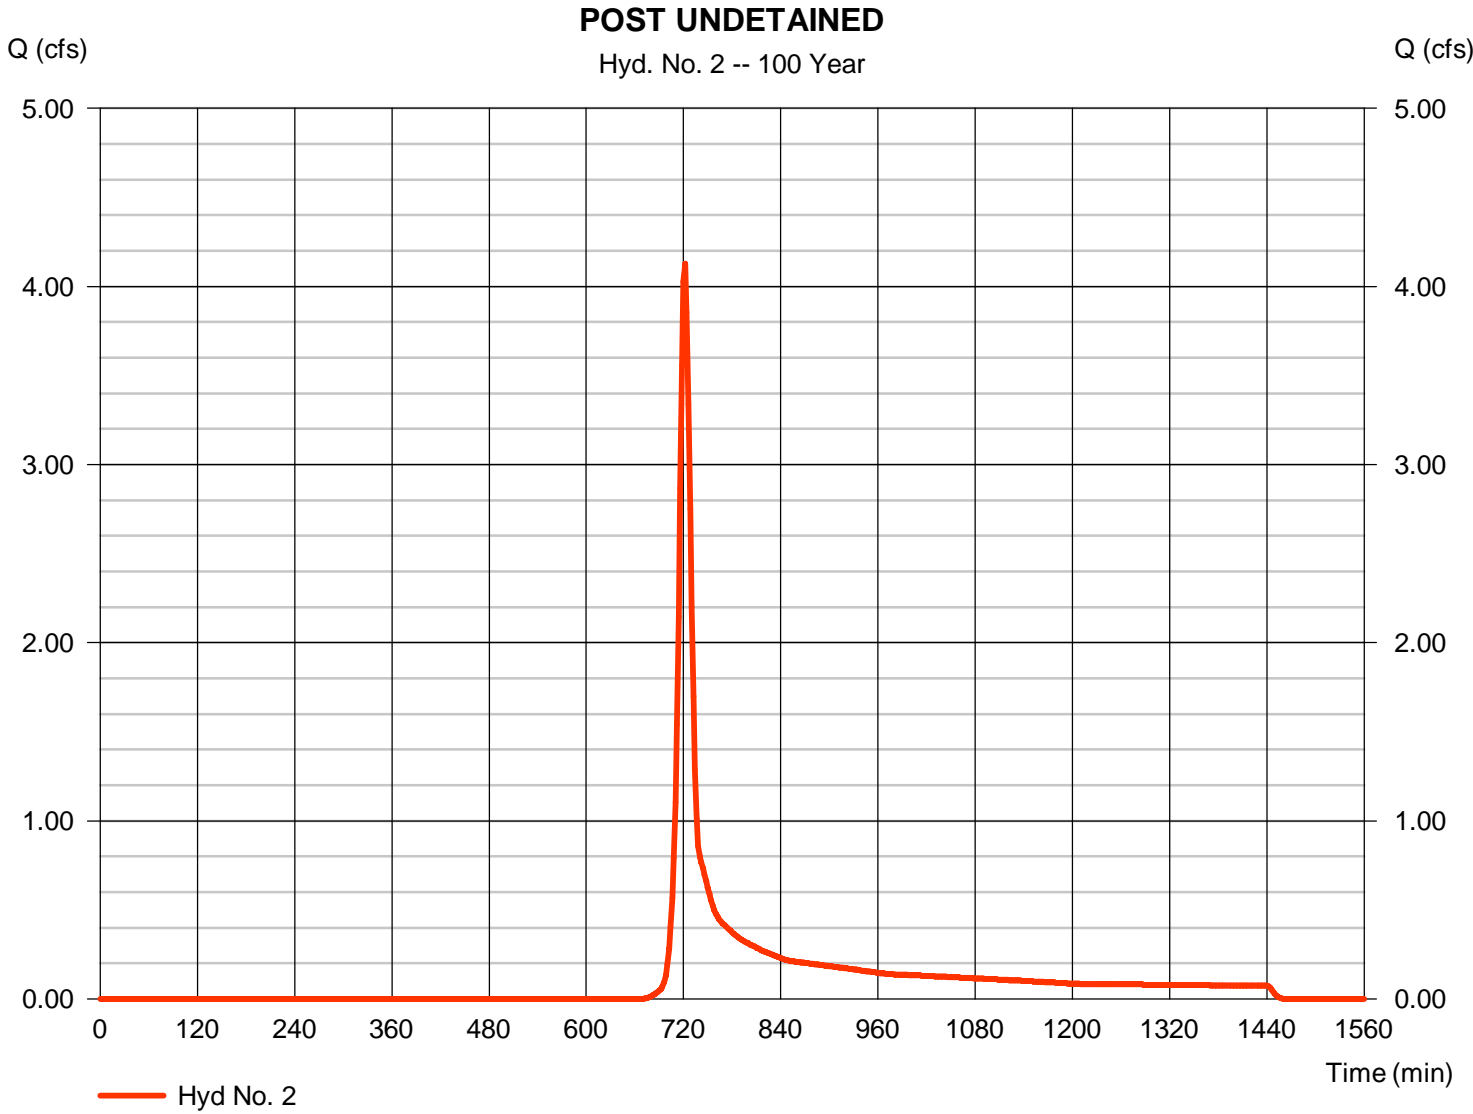

# TR55 Tc Worksheet

Hydraflow Hydrographs Extension for AutoCAD® Civil 3D® 2015 by Autodesk, Inc. v10.4

## Hyd. No. 2

POST UNDETAINED

<u>Description</u>	<u>A</u>	<u>B</u>	<u>C</u>	<u>Totals</u>
<b>Sheet Flow</b>				
Manning's n-value	= 0.240	0.011	0.011	
Flow length (ft)	= 50.0	0.0	0.0	
Two-year 24-hr precip. (in)	= 2.67	0.00	0.00	
Land slope (%)	= 4.00	0.00	0.00	
<b>Travel Time (min)</b>	<b>= 6.80</b>	<b>+</b> <b>0.00</b>	<b>+</b> <b>0.00</b>	<b>= 6.80</b>
<b>Shallow Concentrated Flow</b>				
Flow length (ft)	= 672.00	60.00	133.00	
Watercourse slope (%)	= 4.30	4.00	8.30	
Surface description	= Unpaved	Paved	Unpaved	
Average velocity (ft/s)	=3.35	4.07	4.65	
<b>Travel Time (min)</b>	<b>= 3.35</b>	<b>+</b> <b>0.25</b>	<b>+</b> <b>0.48</b>	<b>= 4.07</b>
<b>Channel Flow</b>				
X sectional flow area (sqft)	= 2.00	0.00	0.00	
Wetted perimeter (ft)	= 4.47	0.00	0.00	
Channel slope (%)	= 2.10	0.00	0.00	
Manning's n-value	= 0.015	0.015	0.015	
Velocity (ft/s)	=8.40	0.00	0.00	
Flow length (ft)	{{0}}96.0	0.0	0.0	
<b>Travel Time (min)</b>	<b>= 0.19</b>	<b>+</b> <b>0.00</b>	<b>+</b> <b>0.00</b>	<b>= 0.19</b>
<b>Total Travel Time, Tc .....</b>				<b>11.10 min</b>




# Hydrograph Report

## Hyd. No. 3

### POST DETAINED

Hydrograph type	= SCS Runoff	Peak discharge	= 2.320 cfs
Storm frequency	= 100 yrs	Time to peak	= 730 min
Time interval	= 2 min	Hyd. volume	= 8,999 cuft
Drainage area	= 1.260 ac	Curve number	= 61*
Basin Slope	= 0.0 %	Hydraulic length	= 0 ft
Tc method	= User	Time of conc. (Tc)	= 24.40 min
Total precip.	= 5.99 in	Distribution	= Type II
Storm duration	= 24 hrs	Shape factor	= 484

\* Composite (Area/CN) = [(0.137 x 85) + (1.123 x 58)] / 1.260

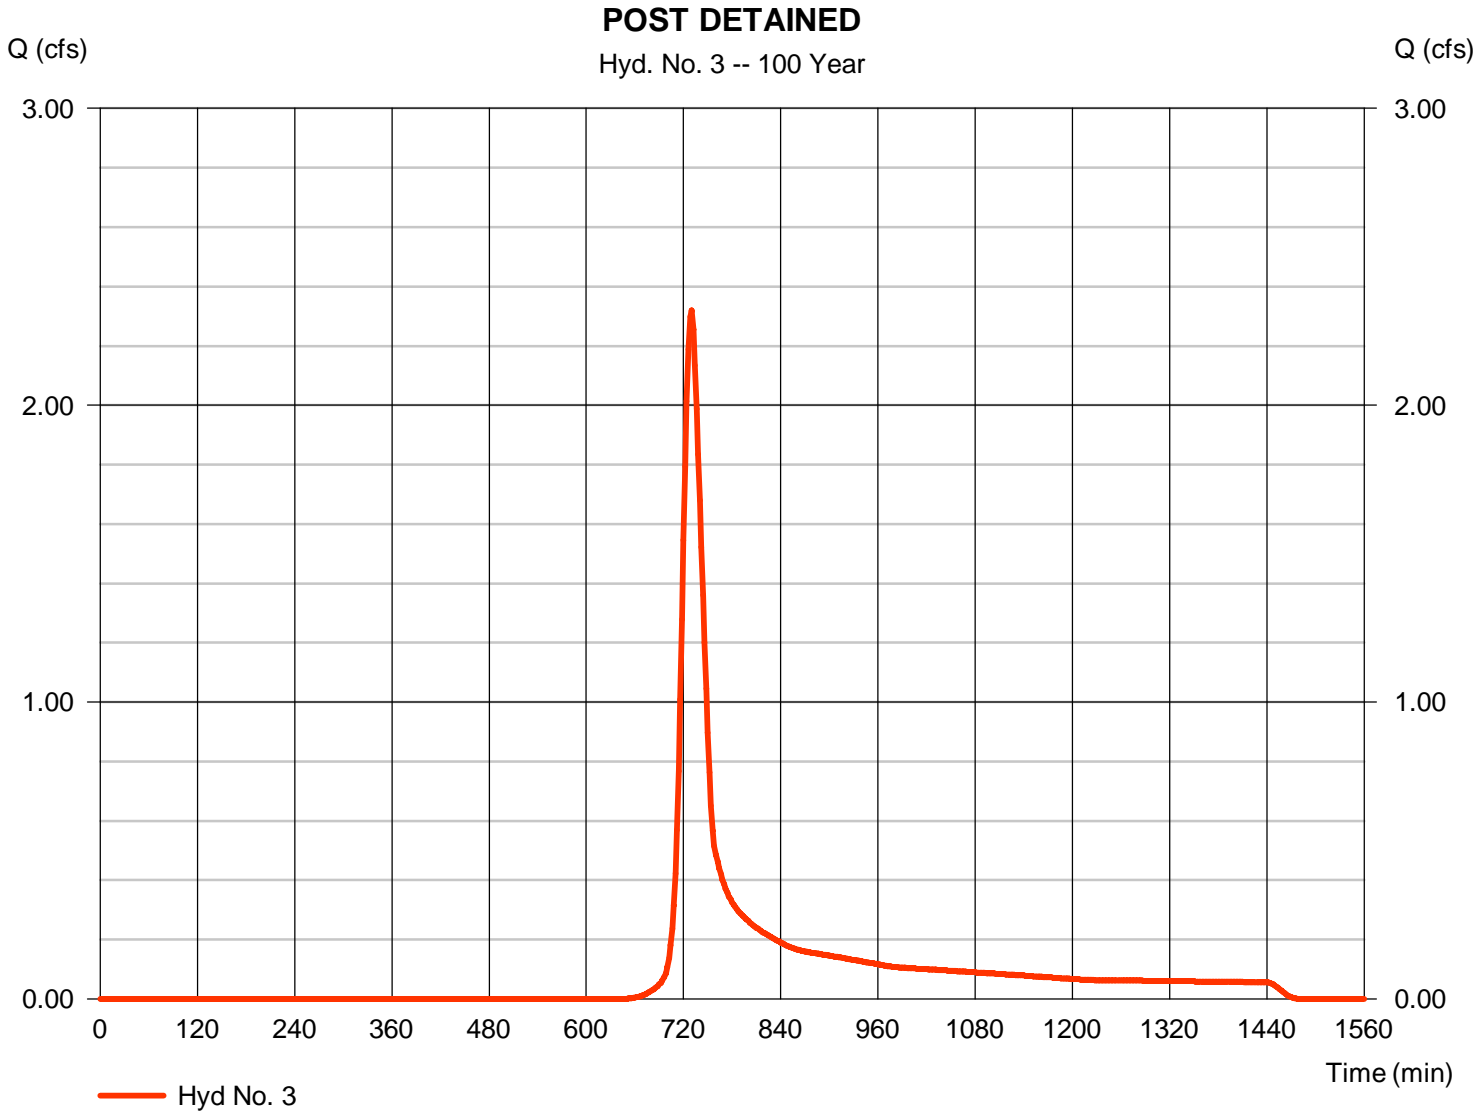

# Hydrograph Report


Hydraflow Hydrographs Extension for AutoCAD® Civil 3D® 2015 by Autodesk, Inc. v10.4

Tuesday, 11 / 1 / 2016

## Hyd. No. 4

### VOLUME ABSTRACTION

Hydrograph type	= Diversion1	Peak discharge	= 2.320 cfs
Storm frequency	= 100 yrs	Time to peak	= 730 min
Time interval	= 2 min	Hyd. volume	= 2,902 cuft
Inflow hydrograph	= 3 - POST DETAINED	2nd diverted hyd.	= 5
Diversion method	= First Flush Volume	Volume Up To	= 2,700 cuft

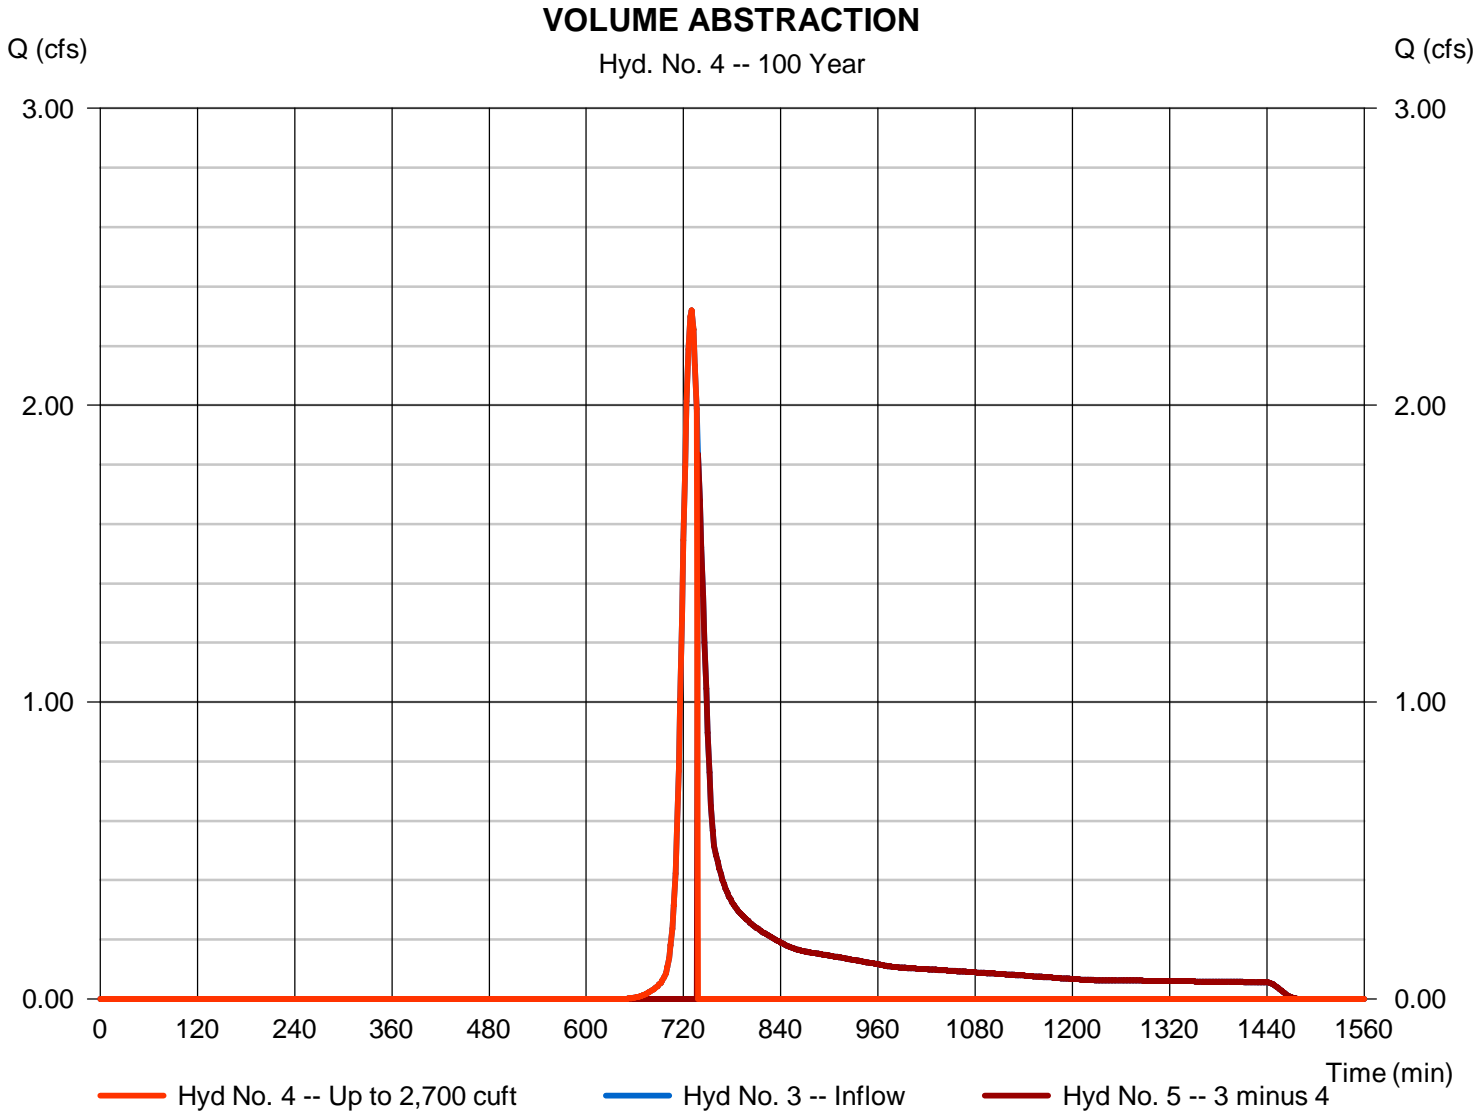

# Hydrograph Report


Hydraflow Hydrographs Extension for AutoCAD® Civil 3D® 2015 by Autodesk, Inc. v10.4

Tuesday, 11 / 1 / 2016

## Hyd. No. 5

POST AFTER BMP

Hydrograph type	= Diversion2	Peak discharge	= 1.836 cfs
Storm frequency	= 100 yrs	Time to peak	= 738 min
Time interval	= 2 min	Hyd. volume	= 6,097 cuft
Inflow hydrograph	= 3 - POST DETAINED	2nd diverted hyd.	= 4
Diversion method	= First Flush Volume	Volume Up To	= 2,700 cuft

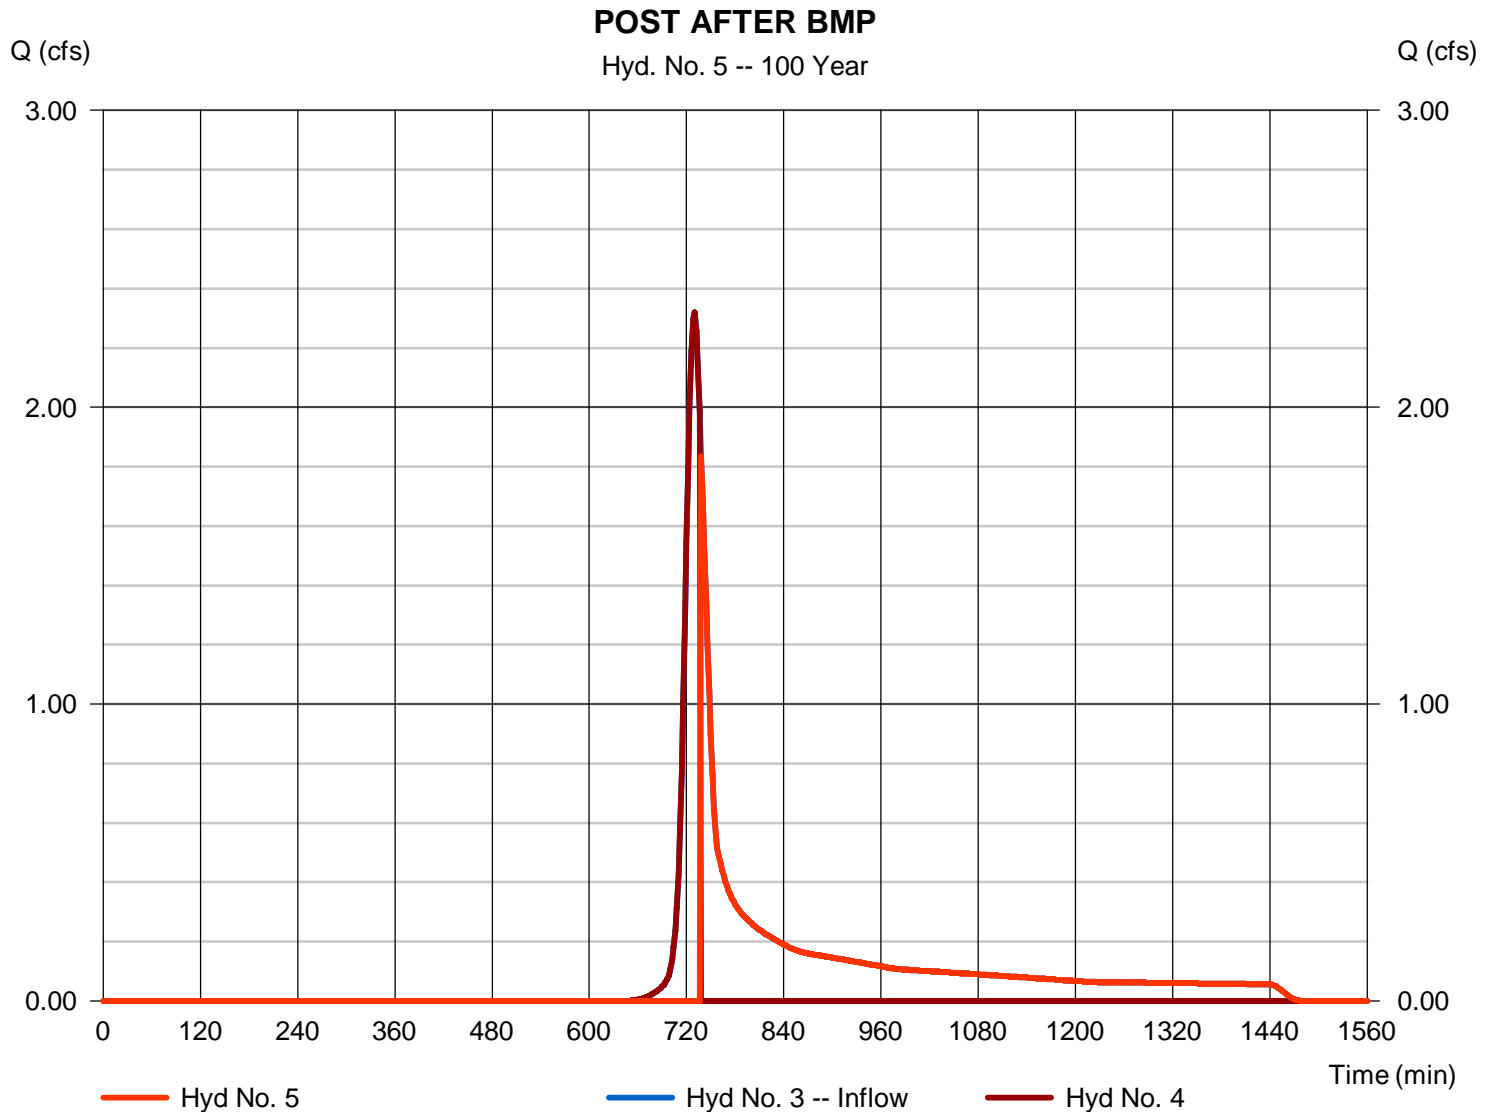

# Hydrograph Report

Hydraflow Hydrographs Extension for AutoCAD® Civil 3D® 2015 by Autodesk, Inc. v10.4

Tuesday, 11 / 1 / 2016

## Hyd. No. 6

POST AT POI

Hydrograph type = Combine  
Storm frequency = 100 yrs  
Time interval = 2 min  
Inflow hyds. = 2, 5

Peak discharge = 4.129 cfs  
Time to peak = 722 min  
Hyd. volume = 17,303 cuft  
Contrib. drain. area = 1.710 ac

