
CORRECTIONS FOR EROSION AND SEDIMENT POLLUTION CONTROL PROGRAM MANUAL ID 386-2134-001, March 2012

Page(s)	Correction
44	Change "Pump-around systems should not be used for bypasses anticipated to last more than 2 weeks" to "Pump-around systems should not be used for bypasses anticipated to last more than 6 weeks. Durations greater than 6 weeks must be approved by DEP."

46 Revise Figure 3.11 as follows:

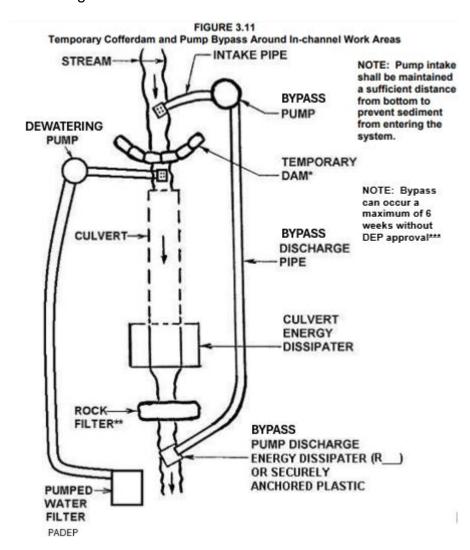


- * Sandbags (Standard Construction Detail #3-15), Jersey barriers (Figure 3.13) or other nonerosive material, no earth fill. Do not excavate a sump for the pump intake.
- ** See Standard Construction Detail #4-14. For low gradient channels, the rock filter may be replaced by an impervious cofferdam to prevent backflow into the work area.
- *** Based on a joint water quality evaluation study conducted by DEP's Bureau of Clean Water and PennDOT's Bureau of Design and Delivery from 2020 to 2024. DEP must approve durations greater than 6 weeks.


CORRECTIONS FOR EROSION AND SEDIMENT POLLUTION CONTROL PROGRAM MANUAL ID 386-2134-001, March 2012

Page(s)	Correction
112, 125, 380	Revise travel time for sheet flow formula to:
	$T_{c(sheet flow)} = \left[\frac{2(L)(n)}{3(S)^{0.5}}\right]^{0.4673}$
124	Revise calculation for 2-year rainfall intensity to:
	$I = \frac{106}{Tc + 17} = \frac{106}{23.24 + 17} = \frac{106}{40.24} = 2.63 \ in/hr$
124	Revise calculation for 10-year rainfall intensity to:
	$I = \frac{170}{Tc + 23} = \frac{170}{23.24 + 23} = \frac{170}{46.24} = 3.68 \ in/hr$
125	Revise Overland Flow Time T_{of} to 11.6 and T_{c} to 23.24.
229	Clarification, in the formula below n = Manning's "n":
	$Q_f = \frac{0.464}{n} D^{8/3} S^{1/2}$
247	Revise formula for the distance (X) in feet from the end of the discharge pipe to the "center" of the basin as follows:
	$X = (V^2/2g)^{0.5} [(1+m/p)^{0.5} + 1 + m/2p] p^{0.5}$
291	Revise Standard Construction Detail #13-4 as follows:

CORRECTIONS FOR EROSION AND SEDIMENT POLLUTION CONTROL PROGRAM MANUAL ID 386-2134-001, March 2012

Page(s) Correction

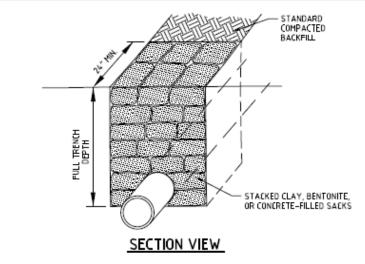



Worksheet #13 – Lines 11 and 12 should read:

(SAmin) REQUIRED SURFACE AREA AT ELEVATION 3 (SQ. FT.) SURFACE AREA PROVIDED AT ELEVATION 3 (SQ. FT.)