



COMMONWEALTH OF PENNSYLVANIA
DEPARTMENT OF ENVIRONMENTAL PROTECTION
AIR QUALITY PROGRAM

STATE ONLY OPERATING PERMIT

Issue Date: September 19, 2018

Effective Date: October 1, 2018

Expiration Date: September 30, 2023

In accordance with the provisions of the Air Pollution Control Act, the Act of January 8, 1960, P.L. 2119, as amended, and 25 Pa. Code Chapter 127, the Owner, [and Operator if noted] (hereinafter referred to as permittee) identified below is authorized by the Department of Environmental Protection (Department) to operate the air emission source(s) more fully described in this permit. This Facility is subject to all terms and conditions specified in this permit. Nothing in this permit relieves the permittee from its obligations to comply with all applicable Federal, State and Local laws and regulations.

The regulatory or statutory authority for each permit condition is set forth in brackets. All terms and conditions in this permit are federally enforceable unless otherwise designated.

State Only Permit No: 67-03004

Federal Tax Id - Plant Code: 23-0838070-1

Owner Information

Name: MAPLE PRESS CO
Mailing Address: PO BOX 2695
480 WILLOW SPRINGS LN
YORK, PA 17405-2695

Plant Information

Plant: MAPLE PRESS CO/YORK
Location: 67 York County 67939 Manchester Township
SIC Code: 2732 Manufacturing - Book Printing

Responsible Official

Name: CHRIS BENYOVSZKY
Title: VP OPERATIONS
Phone: (717) 764 - 5911

Permit Contact Person

Name: ROBIN E MILLER
Title: ACCOUNTING MANAGER
Phone: (717) 764 - 5911

[Signature] _____
WILLIAM R. WEAVER, SOUTH CENTRAL REGION AIR PROGRAM MANAGER



SECTION A. Table of Contents

Section A. Facility/Source Identification

Table of Contents
Site Inventory List

Section B. General State Only Requirements

- #001 Definitions.
- #002 Operating Permit Duration.
- #003 Permit Renewal.
- #004 Operating Permit Fees under Subchapter I.
- #005 Transfer of Operating Permits.
- #006 Inspection and Entry.
- #007 Compliance Requirements.
- #008 Need to Halt or Reduce Activity Not a Defense.
- #009 Duty to Provide Information.
- #010 Revising an Operating Permit for Cause.
- #011 Operating Permit Modifications
- #012 Severability Clause.
- #013 De Minimis Emission Increases.
- #014 Operational Flexibility.
- #015 Reactivation
- #016 Health Risk-based Emission Standards and Operating Practice Requirements.
- #017 Circumvention.
- #018 Reporting Requirements.
- #019 Sampling, Testing and Monitoring Procedures.
- #020 Recordkeeping.
- #021 Property Rights.
- #022 Alternative Operating Scenarios.

Section C. Site Level State Only Requirements

- C-I: Restrictions
- C-II: Testing Requirements
- C-III: Monitoring Requirements
- C-IV: Recordkeeping Requirements
- C-V: Reporting Requirements
- C-VI: Work Practice Standards
- C-VII: Additional Requirements
- C-VIII: Compliance Certification
- C-IX: Compliance Schedule

Section D. Source Level State Only Requirements

- D-I: Restrictions
- D-II: Testing Requirements
- D-III: Monitoring Requirements
- D-IV: Recordkeeping Requirements
- D-V: Reporting Requirements
- D-VI: Work Practice Standards
- D-VII: Additional Requirements

Note: These same sub-sections are repeated for each source!

Section E. Source Group Restrictions

- E-I: Restrictions
- E-II: Testing Requirements
- E-III: Monitoring Requirements



SECTION A. Table of Contents

- E-IV: Recordkeeping Requirements
- E-V: Reporting Requirements
- E-VI: Work Practice Standards
- E-VII: Additional Requirements

Section F. Alternative Operating Scenario(s)

- F-I: Restrictions
- F-II: Testing Requirements
- F-III: Monitoring Requirements
- F-IV: Recordkeeping Requirements
- F-V: Reporting Requirements
- F-VI: Work Practice Standards
- F-VII: Additional Requirements

Section G. Emission Restriction Summary

Section H. Miscellaneous

SECTION A. Site Inventory List

Source ID	Source Name	Capacity/Throughput	Fuel/Material
205	Y-S OIL BOILER	5.250 MMBTU/HR	
101	SHEETFED PRESSES (SIX)	0.040 Lbs/HR	VOC
102	HEATSET WEB PRESSES (TWO)	2.760 Lbs/HR	VOC
103	CLEANUP SOLVENTS (FOR 8 PRESSES)	0.770 Lbs/HR	VOC
104	WETTING AGENTS FOR ALL PRESSES	0.350 Lbs/HR	VOC
105	BINDING LINE ADHESIVES	0.550 Lbs/HR	VOC
201	COLD CLEANING STATION (DEGREASER)		
001	NO. 2 FUEL OIL TANKS (2)		
002	DIESEL FUEL TANK		
S02	HEATSET WEB PRESS STACKS		
S205	Y-S OIL BOILER EXHAUST		
Z01	VOC FROM CLEANUP SOLVENTS		
Z04	VOC FROM WETTING AGENTS		
Z05	EMISSIONS FROM BINDING LINE ADHESIVES		
Z101	SHEETFED PRESSES EMISSIONS		
Z201	FUGITIVE EMISSIONS FROM COLD CLEANING STATION		

PERMIT MAPS



**SECTION B. General State Only Requirements****#001 [25 Pa. Code § 121.1]****Definitions.**

Words and terms that are not otherwise defined in this permit shall have the meanings set forth in Section 3 of the Air Pollution Control Act (35 P.S. § 4003) and in 25 Pa. Code § 121.1.

#002 [25 Pa. Code § 127.446]**Operating Permit Duration.**

- (a) This operating permit is issued for a fixed term of five (5) years and shall expire on the date specified on Page 1 of this permit.
- (b) The terms and conditions of the expired permit shall automatically continue pending issuance of a new operating permit, provided the permittee has submitted a timely and complete application and paid applicable fees required under 25 Pa. Code Chapter 127, Subchapter I and the Department is unable, through no fault of the permittee, to issue or deny a new permit before the expiration of the previous permit.

#003 [25 Pa. Code §§ 127.412, 127.413, 127.414, 127.446 & 127.703(b)&(c)]**Permit Renewal.**

- (a) The permittee shall submit a timely and complete application for renewal of the operating permit to the appropriate Regional Air Program Manager. The application for renewal of the operating permit shall be submitted at least six (6) months and not more than 18 months before the expiration date of this permit.
- (b) The application for permit renewal shall include the current permit number, a description of any permit revisions that occurred during the permit term, and any applicable requirements that were promulgated and not incorporated into the permit during the permit term. An application is complete if it contains sufficient information to begin processing the application, has the applicable sections completed and has been signed by a responsible official.
- (c) The permittee shall submit with the renewal application a fee for the processing of the application and an additional annual administrative fee as specified in 25 Pa. Code § 127.703(b) and (c). The fees shall be made payable to "The Commonwealth of Pennsylvania - Clean Air Fund" and shall be for the amount specified in the following schedule specified in 25 Pa. Code § 127.703(b) and (c).
- (1) Three hundred dollars for applications filed during the 2000-2004 calendar years.
 - (2) Three hundred seventy-five dollars for applications filed for the calendar years beginning in 2005.
- (d) The renewal application shall also include submission of proof that the local municipality and county, in which the facility is located, have been notified in accordance with 25 Pa. Code § 127.413.
- (e) The application for renewal of the operating permit shall also include submission of supplemental compliance review forms in accordance with the requirements of 25 Pa. Code § 127.412(b) and § 127.412(j).
- (f) The permittee, upon becoming aware that any relevant facts were omitted or incorrect information was submitted in the permit application, shall promptly submit such supplementary facts or corrected information as necessary to address any requirements that become applicable to the source after the permittee submits a complete application, but prior to the date the Department takes action on the permit application.

#004 [25 Pa. Code § 127.703]**Operating Permit Fees under Subchapter I.**

- (a) The permittee shall pay fees according to the following schedule specified in 25 Pa. Code § 127.703(b):
- (1) Three hundred dollars for applications filed during the 2000-2004 calendar years.
 - (2) Three hundred seventy-five dollars for applications filed for the calendar years beginning in 2005.

This fee schedule shall apply to the processing of an application for an operating permit as well as the extension,

SECTION B. General State Only Requirements

modification, revision, renewal, and re-issuance of each operating permit or part thereof.

(b) The permittee shall pay an annual operating permit administrative fee according to the fee schedule established in 25 Pa. Code § 127.703(c).

(1) Two hundred fifty dollars for applications filed during the 1995-1999 calendar years.

(2) Three hundred dollars for applications filed during the 2000-2004 calendar years.

(3) Three hundred seventy-five dollars for applications filed during the years beginning in 2005.

(c) The applicable fees shall be made payable to "The Commonwealth of Pennsylvania - Clean Air Fund".

#005 [25 Pa. Code §§ 127.450 (a)(4) and 127.464]**Transfer of Operating Permits.**

(a) This operating permit may not be transferred to another person, except in cases of transfer-of-ownership that are documented and approved by the Department.

(b) In accordance with 25 Pa. Code § 127.450(a)(4), a change in ownership of the source shall be treated as an administrative amendment if the Department determines that no other change in the permit is required and a written agreement has been submitted to the Department identifying the specific date of the transfer of permit responsibility, coverage and liability between the current and the new permittee and a compliance review form has been submitted to, and the permit transfer has been approved by, the Department.

(c) This operating permit is valid only for those specific sources and the specific source locations described in this permit.

#006 [25 Pa. Code § 127.441 and 35 P.S. § 4008]**Inspection and Entry.**

(a) Upon presentation of credentials and other documents as may be required by law, the permittee shall allow the Department or authorized representatives of the Department to perform the following:

(1) Enter at reasonable times upon the permittee's premises where a source is located or emissions related activity is conducted, or where records are kept under the conditions of this permit;

(2) Have access to and copy, at reasonable times, any records that are kept under the conditions of this permit;

(3) Inspect at reasonable times, any facilities, equipment including monitoring and air pollution control equipment, practices, or operations regulated or required under this permit;

(4) Sample or monitor, at reasonable times, any substances or parameters, for the purpose of assuring compliance with the permit or applicable requirements as authorized by the Clean Air Act, the Air Pollution Control Act, or the regulations promulgated under the Acts.

(b) Pursuant to 35 P.S. § 4008, no person shall hinder, obstruct, prevent or interfere with the Department or its personnel in the performance of any duty authorized under the Air Pollution Control Act or regulations adopted thereunder including denying the Department access to a source at this facility. Refusal of entry or access may constitute grounds for permit revocation and assessment of criminal and/or civil penalties.

(c) Nothing in this permit condition shall limit the ability of the EPA to inspect or enter the premises of the permittee in accordance with Section 114 or other applicable provisions of the Clean Air Act.

#007 [25 Pa. Code §§ 127.441 & 127.444]**Compliance Requirements.**

(a) The permittee shall comply with the conditions of this operating permit. Noncompliance with this permit constitutes

SECTION B. General State Only Requirements

a violation of the Clean Air Act and the Air Pollution Control Act and is grounds for one or more of the following:

- (1) Enforcement action
- (2) Permit termination, revocation and reissuance or modification
- (3) Denial of a permit renewal application

(b) A person may not cause or permit the operation of a source which is subject to 25 Pa. Code Article III unless the source(s) and air cleaning devices identified in the application for the plan approval and operating permit and the plan approval issued for the source is operated and maintained in accordance with specifications in the applications and the conditions in the plan approval and operating permit issued by the Department. A person may not cause or permit the operation of an air contamination source subject to 25 Pa. Code Chapter 127 in a manner inconsistent with good operating practices.

(c) For purposes of Sub-condition (b) of this permit condition, the specifications in applications for plan approvals and operating permits are the physical configurations and engineering design details which the Department determines are essential for the permittee's compliance with the applicable requirements in this State-Only permit. Nothing in this sub-condition shall be construed to create an independent affirmative duty upon the permittee to obtain a predetermination from the Department for physical configuration or engineering design detail changes made by the permittee.

#008 [25 Pa. Code § 127.441]**Need to Halt or Reduce Activity Not a Defense.**

It shall not be a defense for the permittee in an enforcement action that it was necessary to halt or reduce the permitted activity in order to maintain compliance with the conditions of this permit.

#009 [25 Pa. Code §§ 127.442(a) & 127.461]**Duty to Provide Information.**

(a) The permittee shall submit reports to the Department containing information the Department may prescribe relative to the operation and maintenance of each source at the facility.

(b) The permittee shall furnish to the Department, in writing, information that the Department may request to determine whether cause exists for modifying, revoking and reissuing, or terminating this permit, or to determine compliance with the permit. Upon request, the permittee shall also furnish to the Department copies of records that the permittee is required to maintain in accordance with this permit.

#010 [25 Pa. Code § 127.461]**Revising an Operating Permit for Cause.**

This operating permit may be terminated, modified, suspended or revoked and reissued if one or more of the following applies:

- (1) The permittee constructs or operates the source subject to the operating permit so that it is in violation of the Air Pollution Control Act, the Clean Air Act, the regulations thereunder, a plan approval, a permit or in a manner that causes air pollution.
- (2) The permittee fails to properly or adequately maintain or repair an air pollution control device or equipment attached to or otherwise made a part of the source.
- (3) The permittee has failed to submit a report required by the operating permit or an applicable regulation.
- (4) The EPA determines that the permit is not in compliance with the Clean Air Act or the regulations thereunder.

#011 [25 Pa. Code §§ 127.450 & 127.462]**Operating Permit Modifications**

(a) The permittee is authorized to make administrative amendments, minor operating permit modifications and

SECTION B. General State Only Requirements

significant operating permit modifications, under this permit, as outlined below:

(b) Administrative Amendments. The permittee shall make administrative operating permit amendments (as defined in 25 Pa. Code § 127.450(a)), according to procedures specified in § 127.450 unless precluded by the Clean Air Act or its regulations.

(c) Minor Operating Permit Modifications. The permittee shall make minor operating permit modifications (as defined 25 Pa. Code § 121.1) in accordance with 25 Pa. Code § 127.462.

(d) Permit modifications which do not qualify as minor permit modifications under 25 Pa. Code § 127.541 will be treated as a significant operating permit revision subject to the public notification procedures in §§ 127.424 and 127.425.

#012 [25 Pa. Code § 127.441]**Severability Clause.**

The provisions of this permit are severable, and if any provision of this permit is determined by a court of competent jurisdiction to be invalid or unenforceable, such a determination will not affect the remaining provisions of this permit.

#013 [25 Pa. Code § 127.449]**De Minimis Emission Increases.**

(a) This permit authorizes de minimis emission increases in accordance with 25 Pa. Code § 127.449 so long as the permittee provides the Department with seven (7) days prior written notice before commencing any de minimis emissions increase. The written notice shall:

(1) Identify and describe the pollutants that will be emitted as a result of the de minimis emissions increase.

(2) Provide emission rates expressed in tons per year and in terms necessary to establish compliance consistent with any applicable requirement.

(b) The Department may disapprove or condition de minimis emission increases at any time.

(c) Except as provided below in (d), the permittee is authorized to make de minimis emission increases (expressed in tons per year) up to the following amounts without the need for a plan approval or prior issuance of a permit modification:

(1) Four tons of carbon monoxide from a single source during the term of the permit and 20 tons of carbon monoxide at the facility during the term of the permit.

(2) One ton of NO_x from a single source during the term of the permit and 5 tons of NO_x at the facility during the term of the permit.

(3) One and six-tenths tons of the oxides of sulfur from a single source during the term of the permit and 8.0 tons of oxides of sulfur at the facility during the term of the permit.

(4) Six-tenths of a ton of PM₁₀ from a single source during the term of the permit and 3.0 tons of PM₁₀ at the facility during the term of the permit. This shall include emissions of a pollutant regulated under Section 112 of the Clean Air Act unless precluded by the Clean Air Act, the regulations thereunder or 25 Pa. Code Article III.

(5) One ton of VOCs from a single source during the term of the permit and 5.0 tons of VOCs at the facility during the term of the permit. This shall include emissions of a pollutant regulated under Section 112 of the Clean Air Act unless precluded by the Clean Air Act, the regulations thereunder or 25 Pa. Code Article III.

(6) Other sources and classes of sources determined to be of minor significance by the Department.

(d) In accordance with § 127.14, the permittee is authorized to install the following minor sources without the need for a plan approval or permit modification:

SECTION B. General State Only Requirements

- (1) Air conditioning or ventilation systems not designed to remove pollutants generated or released from other sources.
 - (2) Combustion units rated at 2,500,000 or less Btu per hour of heat input.
 - (3) Combustion units with a rated capacity of less than 10,000,000 Btu per hour heat input fueled by natural gas supplied by a public utility or by commercial fuel oils which are No. 2 or lighter, viscosity less than or equal to 5.82 c St, and which meet the sulfur content requirements of 25 Pa. Code §123.22 (relating to combustion units). For purposes of this permit, commercial fuel oil shall be virgin oil which has no reprocessed, recycled or waste material added.
 - (4) Space heaters which heat by direct heat transfer.
 - (5) Laboratory equipment used exclusively for chemical or physical analysis.
 - (6) Other sources and classes of sources determined to be of minor significance by the Department.
- (e) This permit does not authorize de minimis emission increases if the emissions increase would cause one or more of the following:
- (1) Increase the emissions of a pollutant regulated under Section 112 of the Clean Air Act except as authorized in Subparagraphs (c)(4) and (5) of this permit condition.
 - (2) Subject the facility to the prevention of significant deterioration requirements in 25 Pa. Code Chapter 127, Subchapter D and/or the new source review requirements in Subchapter E.
 - (3) Violate any applicable requirement of this permit, the Air Pollution Control Act, the Clean Air Act, or the regulations promulgated under either of the acts.
- (f) Emissions authorized under this permit condition shall be included in the monitoring, recordkeeping and reporting requirements of this permit.
- (g) Except for de minimis emission increases, installation of minor sources made pursuant to this permit condition and Plan Approval Exemptions under 25 Pa. Code § 127.14 (relating to exemptions), the permittee is prohibited from making changes or engaging in activities that are not specifically authorized under this permit without first applying for a plan approval. In accordance with § 127.14(b), a plan approval is not required for the construction, modification, reactivation, or installation of the sources creating the de minimis emissions increase.
- (h) The permittee may not meet de minimis emission threshold levels by offsetting emission increases or decreases at the same source.

#014 [25 Pa. Code § 127.3]**Operational Flexibility.**

The permittee is authorized to make changes within the facility in accordance with the regulatory provisions outlined in 25 Pa. Code § 127.3 (relating to operational flexibility) to implement the operational flexibility requirements provisions authorized under Section 6.1(i) of the Air Pollution Control Act and the operational flexibility terms and conditions of this permit. The provisions in 25 Pa. Code Chapter 127 which implement the operational flexibility requirements include the following:

- (1) Section 127.14 (relating to exemptions)
- (2) Section 127.447 (relating to alternative operating scenarios)
- (3) Section 127.448 (relating to emissions trading at facilities with Federally enforceable emissions caps)
- (4) Section 127.449 (relating to de minimis emission increases)
- (5) Section 127.450 (relating to administrative operating permit amendments)

**SECTION B. General State Only Requirements**

(6) Section 127.462 (relating to minor operating permit modifications)

(7) Subchapter H (relating to general plan approvals and general operating permits)

#015 [25 Pa. Code § 127.11]**Reactivation**

(a) The permittee may not reactivate a source that has been out of operation or production for at least one year unless the reactivation is conducted in accordance with a plan approval granted by the Department or in accordance with reactivation and maintenance plans developed and approved by the Department in accordance with 25 Pa. Code § 127.11a(a).

(b) A source which has been out of operation or production for more than five (5) years but less than 10 years may be reactivated and will not be considered a new source if the permittee satisfies the conditions specified in 25 Pa. Code § 127.11a(b).

#016 [25 Pa. Code § 127.36]**Health Risk-based Emission Standards and Operating Practice Requirements.**

(a) When needed to protect public health, welfare and the environment from emissions of hazardous air pollutants from new and existing sources, the permittee shall comply with the health risk-based emission standards or operating practice requirements imposed by the Department, except as precluded by §§ 6.6(d)(2) and (3) of the Air Pollution Control Act [35 P.S. § 4006.6(d)(2) and (3)].

(b) A person challenging a performance or emission standard established by the Department has the burden to demonstrate that performance or emission standard does not meet the requirements of Section 112 of the Clean Air Act.

#017 [25 Pa. Code § 121.9]**Circumvention.**

No person may permit the use of a device, stack height which exceeds good engineering practice stack height, dispersion technique or other technique which, without resulting in reduction of the total amount of air contaminants emitted, conceals or dilutes an emission of air contaminants which would otherwise be in violation of 25 Pa. Code Article III, except that with prior approval of the Department, the device or technique may be used for control of malodors.

#018 [25 Pa. Code §§ 127.402(d) & 127.442]**Reporting Requirements.**

(a) The permittee shall comply with the applicable reporting requirements of the Clean Air Act, the regulations thereunder, the Air Pollution Control Act and 25 Pa. Code Article III including Chapters 127, 135 and 139.

(b) The permittee shall submit reports to the Department containing information the Department may prescribe relative to the operation and maintenance of any air contamination source.

(c) Reports, test data, monitoring data, notifications and requests for renewal of the permit shall be submitted to the:

Regional Air Program Manager
PA Department of Environmental Protection
(At the address given in the permit transmittal letter, or otherwise notified)

(d) Any records or information including applications, forms, or reports submitted pursuant to this permit condition shall contain a certification by a responsible official as to truth, accuracy and completeness. The certifications submitted under this permit shall require a responsible official of the facility to certify that based on information and belief formed after reasonable inquiry, the statements and information in the documents are true, accurate and complete.

(e) Any records, reports or information submitted to the Department shall be available to the public except for such

**SECTION B. General State Only Requirements**

records, reports or information which meet the confidentiality requirements of § 4013.2 of the Air Pollution Control Act and §§ 112(d) and 114(c) of the Clean Air Act. The permittee may not request a claim of confidentiality for any emissions data generated for the facility.

#019 [25 Pa. Code §§ 127.441(c) & 135.5]**Sampling, Testing and Monitoring Procedures.**

(a) The permittee shall comply with the monitoring, recordkeeping or reporting requirements of 25 Pa. Code Chapter 139 and the other applicable requirements of 25 Pa. Code Article III and additional requirements related to monitoring, reporting and recordkeeping required by the Clean Air Act and the regulations thereunder including the Compliance Assurance Monitoring requirements of 40 CFR Part 64, where applicable.

(b) Unless alternative methodology is required by the Clean Air Act and regulations adopted thereunder, sampling, testing and monitoring required by or used by the permittee to demonstrate compliance with any applicable regulation or permit condition shall be conducted in accordance with the requirements of 25 Pa. Code Chapter 139.

#020 [25 Pa. Code §§ 127.441(c) and 135.5]**Recordkeeping.**

(a) The permittee shall maintain and make available, upon request by the Department, the following records of monitored information:

- (1) The date, place (as defined in the permit) and time of sampling or measurements.
- (2) The dates the analyses were performed.
- (3) The company or entity that performed the analyses.
- (4) The analytical techniques or methods used.
- (5) The results of the analyses.
- (6) The operating conditions as existing at the time of sampling or measurement.

(b) The permittee shall retain records of any required monitoring data and supporting information for at least five (5) years from the date of the monitoring, sample, measurement, report or application. Supporting information includes the calibration data and maintenance records and original strip-chart recordings for continuous monitoring instrumentation, and copies of reports required by the permit.

(c) The permittee shall maintain and make available to the Department upon request, records including computerized records that may be necessary to comply with the reporting, recordkeeping and emission statement requirements in 25 Pa. Code Chapter 135 (relating to reporting of sources). In accordance with 25 Pa. Code Chapter 135, § 135.5, such records may include records of production, fuel usage, maintenance of production or pollution control equipment or other information determined by the Department to be necessary for identification and quantification of potential and actual air contaminant emissions.

#021 [25 Pa. Code § 127.441(a)]**Property Rights.**

This permit does not convey any property rights of any sort, or any exclusive privileges.

#022 [25 Pa. Code § 127.447]**Alternative Operating Scenarios.**

The permittee is authorized to make changes at the facility to implement alternative operating scenarios identified in this permit in accordance with 25 Pa. Code § 127.447.

SECTION C. Site Level Requirements**I. RESTRICTIONS.****Emission Restriction(s).****# 001 [25 Pa. Code §123.1]****Prohibition of certain fugitive emissions**

(a) The permittee may not allow the emission into the outdoor atmosphere of a fugitive air contaminant from a source other than the following:

- (1) Construction or demolition of buildings or structures.
- (2) Grading, paving, and maintenance of roads and streets.
- (3) Use of roads and streets. Emissions from material in or on trucks, railroad cars, and other vehicular equipment are not considered as emissions from the use of roads and streets.
- (4) Clearing of land.
- (5) Stockpiling of materials.
- (6) Open burning operations.
- (7) Sources and classes of sources other than those identified in (a)(1)-(a)(6), above, for which the operator has obtained a determination from the Department that fugitive emissions from the source, after appropriate control, meet the following requirements:
 - (i) The emissions are of minor significance with respect to causing air pollution; and
 - (ii) The emissions are not preventing or interfering with the attainment or maintenance of any ambient air quality standard.

002 [25 Pa. Code §123.2]**Fugitive particulate matter**

The permittee may not allow the emission of fugitive particulate matter into the outdoor atmosphere from a source specified in Section C, Condition #001, if the emissions are visible at the point the emissions pass outside the permittee's property.

003 [25 Pa. Code §123.31]**Limitations**

The permittee may not allow the emission into the outdoor atmosphere of any malodorous air contaminants from any source in such a manner that the malodors are detectable outside the permittee's property.

004 [25 Pa. Code §123.41]**Limitations**

The permittee may not allow the emission into the outdoor atmosphere of visible air contaminants in such a manner that the opacity of the emission is either of the following:

- (1) Equal to or greater than 20% for a period or periods aggregating more than three (3) minutes in any one hour.
- (2) Equal to or greater than 60% at any time.

005 [25 Pa. Code §123.42]**Exceptions**

The emission limitation of 25 Pa. Code Section 123.41, shall not apply when:

- (1) The presence of uncombined water is the only reason for failure of the emission to meet the limitations.
- (2) The emission results from the operation of equipment used solely to train and test persons in observing the opacity of visible emissions.
- (3) The emission results from sources specified in Section C, Condition #001, subsections (a)(1)-(a)(7).

SECTION C. Site Level Requirements**# 006 [25 Pa. Code §129.14]****Open burning operations**

(a) The permittee may not allow open burning of materials except when the open burning operations result from:

- (1) A fire set to prevent or abate a fire hazard, when approved by the Department and set by or under the supervision of a public official.
- (2) Any fire set for the purpose of instructing personnel in fire fighting, when approved by the Department.
- (3) A fire set for the prevention and control of disease or pests, when approved by the Department.
- (4) A fire set solely for recreational or ceremonial purposes.
- (5) A fire set solely for cooking food.

(b) This permit does not constitute authorization to burn solid waste pursuant to section 610 (3) of the Solid Waste Management Act. 35 PS Section 6018.610 (3) or any other provision of the Solid Waste Management Act.

II. TESTING REQUIREMENTS.**# 007 [25 Pa. Code §127.441]****Operating permit terms and conditions.**

The Department reserves the right to require exhaust stack testing of the sources & control devices referenced in this permit to measure emissions for purposes including verification of permit condition compliance and estimation of annual air emissions.

008 [25 Pa. Code §139.1]**Sampling facilities.**

Upon the request of the Department, the permittee shall provide adequate sampling ports, safe sampling platforms and adequate utilities for the performance by the Department of tests on such sources. In the request, the Department will set forth the time period in which the facilities shall be provided as well as the specifications for such facilities.

009 [25 Pa. Code §139.11]**General requirements.**

(a) As specified in 25 Pa. Code Section 139.11(1), performance tests shall be conducted while the source is operating at maximum routine operating conditions or under such other conditions, within the capacity of the equipment, as may be requested by the Department.

(b) As specified in 25 Pa. Code Section 139.11(2), the Department will consider test results for approval where sufficient information is provided to verify the source conditions existing at the time of the test and where adequate data is available to show the manner in which the test was conducted. Information submitted to the Department shall include, at a minimum, all of the following:

- (1) A thorough source description, including a description of any air cleaning devices and the flue.
- (2) Process conditions, for example, the throughput rate of feed, and other conditions which may affect emissions from the process.
- (3) The location of the sampling ports.
- (4) Effluent characteristics, including velocity, temperature, moisture content, gas density (percentage CO, CO₂, O₂, and N₂), static and barometric pressures.
- (5) Sample collection techniques employed, including procedures used, equipment descriptions, and data to verify that isokinetic sampling for particulate matter collection occurred and that acceptable test conditions were met.
- (6) Laboratory procedures and results.

SECTION C. Site Level Requirements

(7) Calculated results.

III. MONITORING REQUIREMENTS.**# 010 [25 Pa. Code §123.43]****Measuring techniques**

Visible emissions may be measured using either of the following:

- (1) A device approved by the Department and maintained to provide accurate opacity measurements.
- (2) Observers, trained and certified in EPA Method 9, to measure plume opacity with the naked eye or with the aid of any device(s) approved by the Department.

011 [25 Pa. Code §127.441]**Operating permit terms and conditions.**

The permittee shall conduct a monthly inspection around the facility periphery during daylight hours when the sources are in operation, to detect visible emissions, fugitive emissions, and malodorous air contaminants. Monthly inspections are necessary to determine:

- (a) The presence of visible emissions. Visible emissions may be measured according to the methods specified in Section C, Condition #010. Alternately, personnel who observe visible emissions may report the incident to the Department within two (2) hours of the incident and make arrangements for a certified observer to measure the visible emissions.
- (b) The presence of fugitive emissions beyond the property boundaries, as stated in Section C, Condition #002.
- (c) The presence of odorous air contaminants beyond the property boundaries, as stated in Section C, Condition #003.

IV. RECORDKEEPING REQUIREMENTS.**# 012 [25 Pa. Code §127.441]****Operating permit terms and conditions.**

The permittee shall maintain records of monthly inspections around the facility periphery. The records shall include, at minimum, the following information:

1. The name of the company representative monitoring these instances.
2. The date and time of the observation.
3. The wind direction during each observation.
4. A description of any emissions and/or malodors observed and actions taken to mitigate them. If none are observed, record "NONE."

013 [25 Pa. Code §127.441]**Operating permit terms and conditions.**

All records required by this operating permit and subsequent issuances shall be maintained for the most recent five-year period and made available to the Department upon request.

014 [25 Pa. Code §135.3]**Reporting**

Source owners or operators shall maintain and make available upon request by the Department, records including computerized records that may be necessary to comply with 25 Pa. Code Sections 135.3 and 135.21 (relating to reporting, fuel usage, maintenance of production or pollution control equipment or other information determined by the Department to be necessary for identification and quantification of potential and actual air contaminant emissions. If direct recordkeeping is not possible or practical, sufficient records shall be kept to provide the needed information by indirect means.

SECTION C. Site Level Requirements

V. REPORTING REQUIREMENTS.

015 [25 Pa. Code §127.442]

Reporting requirements.

The permittee shall report malfunctions to the Department. A malfunction is any sudden, infrequent, and not reasonably preventable failure of air pollution control equipment, process equipment, or a process to operate in a normal or usual manner. Failures that are caused in part by poor maintenance or careless operation are not malfunctions. Malfunctions shall be reported as follows:

(a) Malfunction which poses an imminent danger to the public health, safety, welfare, and environment, shall be immediately reported to the Department by telephone. The telephone report of such malfunctions shall occur no later than two (2) hours after the incident. Telephone reports can be made to the Air Quality Program at (717) 771-4481 during normal business hours, or to the Department's Emergency Hotline at (866) 825-0208 at any time. The permittee shall submit a written report of instances of such malfunctions to the Department within three (3) days of the telephone report.

(b) Unless otherwise required by this permit, any other malfunction that is not subject to the reporting requirement of subsection (a) above, shall be reported to the Department, in writing, within five (5) days of malfunction discovery.

VI. WORK PRACTICE REQUIREMENTS.

016 [25 Pa. Code §123.1]

Prohibition of certain fugitive emissions

The permittee shall take all reasonable actions to prevent particulate matter from becoming airborne from any source specified in Section C, Condition #001(a)(1)-(a)(7). These actions shall include, but are not limited to the following:

(1) Use, where possible, of water or chemicals for control of dust in the demolition of buildings or structures, construction operations, the grading of roads, or the clearing of land.

(2) Application of asphalt, oil, water, or suitable chemicals on dirt roads, material stockpiles, and other surfaces which may give rise to airborne dusts.

(3) Paving and maintenance of roadways.

(4) Prompt removal of earth or other material from paved streets onto which earth or other material has been transported by trucking or earth moving equipment, erosion by water, or other means.

017 [25 Pa. Code §127.444]

Compliance requirements.

The permittee shall operate and maintain all sources identified in this operating permit in accordance with the manufacturer's recommendations/specifications, as well as in a manner consistent with good operating practices.

VII. ADDITIONAL REQUIREMENTS.

No additional requirements exist except as provided in other sections of this permit including Section B (State Only General Requirements).

VIII. COMPLIANCE CERTIFICATION.

No additional compliance certifications exist except as provided in other sections of this permit including Section B (relating to State Only General Requirements).

IX. COMPLIANCE SCHEDULE.

No compliance milestones exist.

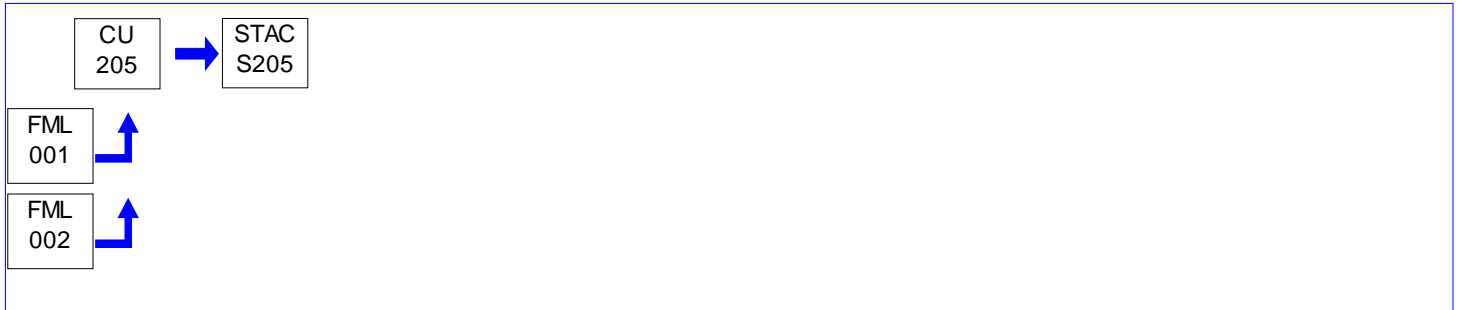
SECTION D. Source Level Requirements

Source ID: 205

Source Name: Y-S OIL BOILER

Source Capacity/Throughput: 5.250 MMBTU/HR

Conditions for this source occur in the following groups: 002

**I. RESTRICTIONS.****Emission Restriction(s).****# 001 [25 Pa. Code §123.22]****Combustion units**

No person may permit the emission into the outdoor atmosphere of sulfur oxides, expressed as SO₂, from a combustion unit in excess of the rate of 4 pounds per million BTU of heat input over any 1 hour period.

002 [25 Pa. Code §123.22]**Combustion units**

(2) Commercial fuel oil.

(i) Except as specified in subparagraphs (ii) and (iii), a person may not offer for sale, deliver for use, exchange in trade or permit the use of commercial fuel oil in nonair basin areas if the commercial fuel oil contains sulfur in excess of the applicable maximum allowable sulfur content set forth in the following tables:

Grades Commercial Fuel Oil Maximum Allowable % Sulfur by Weight through June 30, 2016:

No. 2 and Lighter (viscosity less than or equal to 5.820cSt) 0.3

Maximum Allowable Sulfur Content Beginning July 1, 2016, Expressed as Parts per Million (ppm) by Weight or Percentage by Weight ;

Grades Commercial Fuel Oil

(Consistent with ASTM D396)

No. 2 and lighter oil 500 ppm (0.05%)

(ii) Commercial fuel oil that was stored in this Commonwealth by the ultimate consumer prior to July 1, 2016, which met the applicable maximum allowable sulfur content for commercial fuel oil through June 30, 2016, in subparagraph (i) at the time it was stored, may be used by the ultimate consumer in this Commonwealth on and after July 1, 2016.

Operation Hours Restriction(s).**# 003 [25 Pa. Code §127.441]****Operating permit terms and conditions.**

The permittee shall limit the operation of the Source ID 205 oil-fired boiler to less than 800 hours per consecutive 12-month period. This voluntary limit establishes the unit as a "limited-use boiler" for 40 CFR Part 63 Subpart JJJJJJ purposes having an annual capacity factor of no more than 10%. Compliance verification requires the permittee to maintain monthly records of boiler operation and make those records available to Department representatives upon request.

II. TESTING REQUIREMENTS.

No additional testing requirements exist except as provided in other sections of this permit including Section B (State Only General Requirements) and/or Section E (Source Group Restrictions).



SECTION D. Source Level Requirements

III. MONITORING REQUIREMENTS.

No additional monitoring requirements exist except as provided in other sections of this permit including Section B (State Only General Requirements) and/or Section E (Source Group Restrictions).

IV. RECORDKEEPING REQUIREMENTS.

No additional record keeping requirements exist except as provided in other sections of this permit including Section B (State Only General Requirements) and/or Section E (Source Group Restrictions).

V. REPORTING REQUIREMENTS.

No additional reporting requirements exist except as provided in other sections of this permit including Section B (State Only General Requirements) and/or Section E (Source Group Restrictions).

VI. WORK PRACTICE REQUIREMENTS.

No additional work practice requirements exist except as provided in other sections of this permit including Section B (State Only General Requirements) and/or Section E (Source Group Restrictions).


VII. ADDITIONAL REQUIREMENTS.

No additional requirements exist except as provided in other sections of this permit including Section B (State Only General Requirements) and/or Section E (Source Group Restrictions).

SECTION D. Source Level Requirements

Source ID: 102 Source Name: HEATSET WEB PRESSES (TWO)
Source Capacity/Throughput: 2.760 Lbs/HR VOC

Conditions for this source occur in the following groups: 001
003

**I. RESTRICTIONS.**

No additional requirements exist except as provided in other sections of this permit including Section B (State Only General Requirements) and/or Section E (Source Group Restrictions).

II. TESTING REQUIREMENTS.

No additional testing requirements exist except as provided in other sections of this permit including Section B (State Only General Requirements) and/or Section E (Source Group Restrictions).

III. MONITORING REQUIREMENTS.

No additional monitoring requirements exist except as provided in other sections of this permit including Section B (State Only General Requirements) and/or Section E (Source Group Restrictions).

IV. RECORDKEEPING REQUIREMENTS.

No additional record keeping requirements exist except as provided in other sections of this permit including Section B (State Only General Requirements) and/or Section E (Source Group Restrictions).

V. REPORTING REQUIREMENTS.

No additional reporting requirements exist except as provided in other sections of this permit including Section B (State Only General Requirements) and/or Section E (Source Group Restrictions).

VI. WORK PRACTICE REQUIREMENTS.

No additional work practice requirements exist except as provided in other sections of this permit including Section B (State Only General Requirements) and/or Section E (Source Group Restrictions).


VII. ADDITIONAL REQUIREMENTS.

No additional requirements exist except as provided in other sections of this permit including Section B (State Only General Requirements) and/or Section E (Source Group Restrictions).

SECTION D. Source Level Requirements

Source ID: 103 Source Name: CLEANUP SOLVENTS (FOR 8 PRESSES)
Source Capacity/Throughput: 0.770 Lbs/HR VOC

Conditions for this source occur in the following groups: 001
003

**I. RESTRICTIONS.**

No additional requirements exist except as provided in other sections of this permit including Section B (State Only General Requirements) and/or Section E (Source Group Restrictions).

II. TESTING REQUIREMENTS.

No additional testing requirements exist except as provided in other sections of this permit including Section B (State Only General Requirements) and/or Section E (Source Group Restrictions).

III. MONITORING REQUIREMENTS.

No additional monitoring requirements exist except as provided in other sections of this permit including Section B (State Only General Requirements) and/or Section E (Source Group Restrictions).

IV. RECORDKEEPING REQUIREMENTS.

No additional record keeping requirements exist except as provided in other sections of this permit including Section B (State Only General Requirements) and/or Section E (Source Group Restrictions).

V. REPORTING REQUIREMENTS.

No additional reporting requirements exist except as provided in other sections of this permit including Section B (State Only General Requirements) and/or Section E (Source Group Restrictions).

VI. WORK PRACTICE REQUIREMENTS.

No additional work practice requirements exist except as provided in other sections of this permit including Section B (State Only General Requirements) and/or Section E (Source Group Restrictions).

VII. ADDITIONAL REQUIREMENTS.

No additional requirements exist except as provided in other sections of this permit including Section B (State Only General Requirements) and/or Section E (Source Group Restrictions).

SECTION D. Source Level Requirements

Source ID: 105


Source Name: BINDING LINE ADHESIVES

Source Capacity/Throughput:

0.550 Lbs/HR

VOC

Conditions for this source occur in the following groups: 001

**I. RESTRICTIONS.**

No additional requirements exist except as provided in other sections of this permit including Section B (State Only General Requirements) and/or Section E (Source Group Restrictions).

II. TESTING REQUIREMENTS.

No additional testing requirements exist except as provided in other sections of this permit including Section B (State Only General Requirements) and/or Section E (Source Group Restrictions).

III. MONITORING REQUIREMENTS.

No additional monitoring requirements exist except as provided in other sections of this permit including Section B (State Only General Requirements) and/or Section E (Source Group Restrictions).

IV. RECORDKEEPING REQUIREMENTS.

No additional record keeping requirements exist except as provided in other sections of this permit including Section B (State Only General Requirements) and/or Section E (Source Group Restrictions).

V. REPORTING REQUIREMENTS.

No additional reporting requirements exist except as provided in other sections of this permit including Section B (State Only General Requirements) and/or Section E (Source Group Restrictions).

VI. WORK PRACTICE REQUIREMENTS.

No additional work practice requirements exist except as provided in other sections of this permit including Section B (State Only General Requirements) and/or Section E (Source Group Restrictions).

VII. ADDITIONAL REQUIREMENTS.


No additional requirements exist except as provided in other sections of this permit including Section B (State Only General Requirements) and/or Section E (Source Group Restrictions).

SECTION D. Source Level Requirements

Source ID: 201

Source Name: COLD CLEANING STATION (DEGREASER)

Source Capacity/Throughput:

**I. RESTRICTIONS.****Emission Restriction(s).****# 001 [25 Pa. Code §129.63]****Degreasing operations**

After December 22, 2002, the permittee may not use, sell or offer for sale for use in a cold cleaning machine any solvent with a vapor pressure of 1.0 millimeter or mercury (mm Hg) or greater and containing greater than 5% VOC by weight, measured at 20°C (68°F) containing VOCs.

The above requirement does not apply:

- (i) To cold cleaning machines used in extreme cleaning service.
- (ii) If the owner or operator of the cold cleaning machine demonstrates, and the Department approves in writing, that compliance with this condition will result in unsafe operating conditions.
- (iii) To immersion cold cleaning machines with a freeboard ratio equal to or greater than 0.75.

Throughput Restriction(s).**# 002 [25 Pa. Code §129.63]****Degreasing operations**

Immersion cold cleaning machines shall have a freeboard ratio of 0.50 or greater.

II. TESTING REQUIREMENTS.

No additional testing requirements exist except as provided in other sections of this permit including Section B (State Only General Requirements).

III. MONITORING REQUIREMENTS.

No additional monitoring requirements exist except as provided in other sections of this permit including Section B (State Only General Requirements).

IV. RECORDKEEPING REQUIREMENTS.**# 003 [25 Pa. Code §129.63]****Degreasing operations**

The permittee shall maintain for at least two (2) years and shall provide to the Department, on request, the following information:

- (i) The name and address of the solvent supplier.
- (ii) The type of solvent including the product or vendor identification number.
- (iii) The vapor pressure of the solvent measured in mm Hg at 20°C (68°F).

An invoice, bill of sale, certificate that corresponds to a number of sales, Material Safety Data Sheet (MSDS), or other appropriate documentation acceptable to the Department may be used to comply with this section.

V. REPORTING REQUIREMENTS.

No additional reporting requirements exist except as provided in other sections of this permit including Section B (State Only General Requirements).

SECTION D. Source Level Requirements**VI. WORK PRACTICE REQUIREMENTS.****# 004 [25 Pa. Code §129.63]****Degreasing operations**

Immersion cold cleaning machines shall be equipped with a cover that shall be closed at all times except during cleaning of parts or the addition or removal of solvent. For remote reservoir cold cleaning machines which drain directly into the solvent storage reservoir, a perforated drain with a diameter of not more than six (6) inches shall constitute an acceptable cover.

005 [25 Pa. Code §129.63]**Degreasing operations**

For immersion cold cleaning machines and remote reservoir cold cleaning machines, the permittee shall:

Have a permanent, conspicuous label summarizing the operating requirements in Section D, Condition #004. In addition, the label shall include the following discretionary good operating practices:

(A) Cleaned parts should be drained at least 15 seconds or until dripping ceases, whichever is longer. Parts having cavities or blind holes shall be tipped or rotated while the part is draining. During the draining, tipping or rotating, the parts should be positioned so that solvent drains directly back to the cold cleaning machine.

(B) When a pump-agitated solvent bath is used, the agitator should be operated to produce a rolling motion of the solvent with no observable splashing of the solvent against the tank walls or the parts being cleaned.

(C) Work area fans should be located and positioned so that they do not blow across the opening of the degreaser unit.

006 [25 Pa. Code §129.63]**Degreasing operations**

The permittee shall operate the cold cleaning machines in accordance with the following procedures:

(i) Waste solvent shall be collected and stored in closed containers. The closed containers may contain a device that allows pressure relief, but does not allow liquid solvent to drain from the container.

(ii) Flushing of parts using a flexible hose or other flushing device shall be performed only within the cold cleaning machine. The solvent spray shall be a solid fluid stream, not an atomized or shower spray.

(iii) Sponges, fabric, wood, leather, paper products and other absorbent materials may not be cleaned in the cold cleaning machine.

(iv) Air agitated solvent baths may not be used.

(v) Spills during solvent transfer and use of the cold cleaning machine shall be cleaned up immediately.

VII. ADDITIONAL REQUIREMENTS.**# 007 [25 Pa. Code §129.63]****Degreasing operations**

The permittee that operates a parts washer or cold cleaning machines that use 2 gallons or more of solvents containing greater than 5% VOC content by weight for the cleaning of metal parts shall comply with the requirements listed in this section.

**SECTION E. Source Group Restrictions.**

Group Name: 001

Group Description: Process Emissions

Sources included in this group

ID	Name
101	SHEETFED PRESSES (SIX)
102	HEATSET WEB PRESSES (TWO)
103	CLEANUP SOLVENTS (FOR 8 PRESSES)
104	WETTING AGENTS FOR ALL PRESSES
105	BINDING LINE ADHESIVES

I. RESTRICTIONS.

No additional requirements exist except as provided in other sections of this permit including Section B (State Only General Requirements).

II. TESTING REQUIREMENTS.

No additional testing requirements exist except as provided in other sections of this permit including Section B (State Only General Requirements).

III. MONITORING REQUIREMENTS.

No additional monitoring requirements exist except as provided in other sections of this permit including Section B (State Only General Requirements).

IV. RECORDKEEPING REQUIREMENTS.**# 001 [25 Pa. Code §127.441]****Operating permit terms and conditions.**

The permittee shall maintain documentation that supports the calculations, emission estimate factors and assumptions with supporting documentation. This documents shall include, but are not limited to: Certified Product Data Sheets (CPDS), and/or Material Safety Data Sheets (MSDS) for each ink, cleaning solution, fountain solution, wetting agent and adhesive.

V. REPORTING REQUIREMENTS.**# 002 [25 Pa. Code §135.3]****Reporting**

The permittee shall submit an annual emission inventory report to the Department that includes the total consumption of all VOC and/or HAP containing inks, coatings, solvents, solutions, wetting agents and adhesives used for this group.

The report for each January 1st through December 31st period is due no later than March 1st of the following year for each year authorized by the operating permit or its renewal.

The permittee may request an extension of time from the Department for the filing of the annual report specified above and the Department may grant the extension for reasonable cause.

VI. WORK PRACTICE REQUIREMENTS.

No additional work practice requirements exist except as provided in other sections of this permit including Section B (State Only General Requirements).

VII. ADDITIONAL REQUIREMENTS.

No additional requirements exist except as provided in other sections of this permit including Section B (State Only General Requirements).

**SECTION E. Source Group Restrictions.**

Group Name: 002

Group Description: 40 CFR Part 63 Subpart JJJJJ Requirements

Sources included in this group

ID	Name
205	Y-S OIL BOILER

I. RESTRICTIONS.

No additional requirements exist except as provided in other sections of this permit including Section B (State Only General Requirements).

II. TESTING REQUIREMENTS.

No additional testing requirements exist except as provided in other sections of this permit including Section B (State Only General Requirements).

III. MONITORING REQUIREMENTS.

No additional monitoring requirements exist except as provided in other sections of this permit including Section B (State Only General Requirements).

IV. RECORDKEEPING REQUIREMENTS.

No additional record keeping requirements exist except as provided in other sections of this permit including Section B (State Only General Requirements).

V. REPORTING REQUIREMENTS.

No additional reporting requirements exist except as provided in other sections of this permit including Section B (State Only General Requirements).

VI. WORK PRACTICE REQUIREMENTS.

No additional work practice requirements exist except as provided in other sections of this permit including Section B (State Only General Requirements).

VII. ADDITIONAL REQUIREMENTS.

001 [40 CFR Part 63 NESHAPS for Source Categories §40 CFR 63.11193]

SUBPART JJJJJ - National Emission Standards for Hazardous Air Pollutants for Industrial, Commercial, and Institutional Boilers Area Sources

Am I subject to this subpart?

§ 63.11193 Am I subject to this subpart?

You are subject to this subpart if you own or operate an industrial, commercial, or institutional boiler as defined in § 63.11237 that is located at, or is part of, an area source of hazardous air pollutants (HAP), as defined in § 63.2, except as specified in § 63.11195.

§ 63.11194 What is the affected source of this subpart?

(a) This subpart applies to each new, reconstructed, or existing affected source as defined in paragraphs (a)(1) and (2) of this section.

(1) The affected source of this subpart is the collection of all existing industrial, commercial, and institutional boilers within a subcategory, as listed in § 63.11200 and defined in § 63.11237, located at an area source.

(2) The affected source of this subpart is each new or reconstructed industrial, commercial, or institutional boiler within a subcategory, as listed in § 63.11200 and as defined in § 63.11237, located at an area source.

SECTION E. Source Group Restrictions.

(b) An affected source is an existing source if you commenced construction or reconstruction of the affected source on or before June 4, 2010.

(c) – (d) [NA – UNIT(S) ARE EXISTING]

(e) An existing dual-fuel fired boiler meeting the definition of gas-fired boiler, as defined in § 63.11237, that meets the applicability requirements of this subpart after June 4, 2010 due to a fuel switch from gaseous fuel to solid fossil fuel, biomass, or liquid fuel is considered to be an existing source under this subpart as long as the boiler was designed to accommodate the alternate fuel.

(f) If you are an owner or operator of an area source subject to this subpart, you are exempt from the obligation to obtain a permit under 40 CFR part 70 or part 71 as a result of this subpart. You may, however, be required to obtain a title V permit due to another reason or reasons. See 40 CFR 70.3(a) and (b) or 71.3(a) and (b). Notwithstanding the exemption from title V permitting for area sources under this subpart, you must continue to comply with the provisions of this subpart.

[76 FR 15591, Mar. 21, 2011, as amended at 78 FR 7506, Feb. 1, 2013]

§ 63.11195 Are any boilers not subject to this subpart?

The types of boilers listed in paragraphs (a) through (k) of this section are not subject to this subpart and to any requirements in this subpart.

(a) [NA – NO UNITS PART OF SOURCES SUBJECT TO OTHER PART 63 SUBPART]

(b) [NA – NO CAA SECTION 129 UNITS]

(c) [NA – UNITS DO NOT BURN HAZARDOUS WASTE].

(d) [NA – UNITS ARE NOT R&D]

(e) [NA – UNITS ARE NOT DEFINED AS GAS-FIRED]

(f) [NA – UNITS NOT DEFINED AS HOT WATER HEATERS]

(g) [NA – UNITS NOT USED AS CONTROL DEVICES]

(h) [NA – UNITS DO NOT QUALIFY AS TEMPORARY UNITS]

(i) [NA – UNITS ARE NOT DEFINED AS RESIDENTIAL]

(j) [NA – UNITS ARE NOT DEFINED AS ELECTRIC]

(k) [NA – UNITS ARE NOT EGUs]

[76 FR 15591, Mar. 21, 2011, as amended at 78 FR 7506, Feb. 1, 2013; 81 FR 63125, Sept. 14, 2016]

§ 63.11196 What are my compliance dates?

(a) If you own or operate an existing affected boiler, you must achieve compliance with the applicable provisions in this subpart as specified in paragraphs (a)(1) through (3) of this section.

(1) If the existing affected boiler is subject to a work practice or management practice standard of a tune-up, you must achieve compliance with the work practice or management practice standard no later than March 21, 2014.

(2) [NA - SOURCES IN THIS GROUP ARE NOT SUBJECT TO EMISSION LIMITS]

(3) [NA – ENERGY ASSESSMENT NOT REQUIRED]

**SECTION E. Source Group Restrictions.**

(b) [NA – THE SOURCES IN THIS GROUP ARE EXISTING]

(c) [NA – THE SOURCES IN THIS GROUP ARE EXISTING]

(d) [NA – NSPS 4C AND 4D EXEMPTIONS NOT INVOKED]

[76 FR 15591, Mar. 21, 2011, as amended at 78 FR 7506, Feb. 1, 2013]

Emission Limits, Work Practice Standards, Emission Reduction Measures, and Management Practices

§ 63.11200 What are the subcategories of boilers?

The subcategories of boilers, as defined in § 63.11237 are:

(a) [NA – UNIT(S) ARE OIL-FIRED]

(b) [NA – UNIT(S) ARE OIL-FIRED]

(c) Oil.

(d) [NA – UNIT(S) ARE LIMITED USE]

(e) [NA – UNIT(S) ARE > 5 MMBTU]

(f) [NA – NO O₂ TRIM SYSTEM(S)]

(g) Limited-use boilers.

[78 FR 7506, Feb. 1, 2013]

§ 63.11201 What standards must I meet?

(a) [NA - SOURCES IN THIS GROUP ARE NOT SUBJECT TO EMISSION LIMITS]

(b) You must comply with each work practice standard, emission reduction measure, and management practice specified in Table 2 to this subpart that applies to your boiler.

TABLE 2 REQUIREMENTS:

As stated in § 63.11201, you must comply with the following applicable work practice standards, emission reduction measures, and management practices:

10. If your boiler is in this subcategory: Existing limited-use boilers, you must meet the following: Conduct an initial tune-up as specified in § 63.11214, and conduct a tune-up of the boiler every 5 years as specified in § 63.11223.

END OF TABLE 2 REQUIREMENTS

(c) [NA – SOURCES IN THIS GROUP ARE NOT SUBJECT TO OPERATING LIMITS]

(d) These standards apply at all times the affected boiler is operating, except during periods of startup and shutdown as defined in § 63.11237, during which time you must comply only with Table 2 to this subpart.

[76 FR 15591, Mar. 21, 2011, as amended at 78 FR 7506, Feb. 1, 2013]

General Compliance Requirements

**SECTION E. Source Group Restrictions.**

§ 63.11205 What are my general requirements for complying with this subpart?

(a) At all times you must operate and maintain any affected source, including associated air pollution control equipment and monitoring equipment, in a manner consistent with safety and good air pollution control practices for minimizing emissions. The general duty to minimize emissions does not require you to make any further efforts to reduce emissions if levels required by this standard have been achieved. Determination of whether such operation and maintenance procedures are being used will be based on information available to the Administrator that may include, but is not limited to, monitoring results, review of operation and maintenance procedures, review of operation and maintenance records, and inspection of the source.

(b) [NA - SOURCES IN THIS GROUP ARE NOT SUBJECT TO EMISSION LIMITS]

(c) [NA - SOURCES IN THIS GROUP ARE NOT SUBJECT TO EMISSION LIMITS]

[76 FR 15591, Mar. 21, 2011, as amended at 78 FR 7506, Feb. 1, 2013]

Initial Compliance Requirements

§ 63.11210 What are my initial compliance requirements and by what date must I conduct them?

(a) [NA - SOURCES IN THIS GROUP ARE NOT SUBJECT TO EMISSION LIMITS]

(b) [NA - SOURCES IN THIS GROUP ARE NOT SUBJECT TO EMISSION LIMITS]

(c) For existing affected boilers that have applicable work practice standards, management practices, or emission reduction measures, you must demonstrate initial compliance no later than the compliance date that is specified in § 63.11196 and according to the applicable provisions in § 63.7(a)(2), except as provided in paragraph (j) of this section.

(d) [NA - SOURCES IN THIS GROUP ARE NOT SUBJECT TO EMISSION LIMITS]

(e) –(g) [NA – THE SOURCES IN THIS GROUP ARE EXISTING]

(h) [NA – NSPS 4C AND 4D EXEMPTIONS NOT INVOKED]

(i) For affected boilers that switch fuels or make a physical change to the boiler that results in the applicability of a different subcategory within subpart JJJJJJ or the boiler becoming subject to subpart JJJJJJ, you must demonstrate compliance within 180 days of the effective date of the fuel switch or the physical change. Notification of such changes must be submitted according to § 63.11225(g).

(j) [NA – FACILITY IS MINOR FOR HAP]

(k) [NA – UNITS HAVE OPERATED SINCE 6J EFFECTIVE DATE]

[76 FR 15591, Mar. 21, 2011, as amended at 78 FR 7507, Feb. 1, 2013; 81 FR 63125, Sept. 14, 2016]

§ 63.11211 How do I demonstrate initial compliance with the emission limits?

[NA - SOURCES IN THIS GROUP ARE NOT SUBJECT TO EMISSION LIMITS]

§ 63.11212 What stack tests and procedures must I use for the performance tests?

[NA - SOURCES IN THIS GROUP ARE NOT SUBJECT TO PERFORMANCE TESTING]

§ 63.11213 What fuel analyses and procedures must I use for the performance tests?

[NA - SOURCES IN THIS GROUP ARE NOT SUBJECT TO PERFORMANCE TESTING]

**SECTION E. Source Group Restrictions.**

§ 63.11214 How do I demonstrate initial compliance with the work practice standard, emission reduction measures, and management practice?

(a) [NA – UNIT(S) > 10 MMBTU]

(b) If you own or operate an existing or new biomass-fired boiler or an existing or new oil-fired boiler, you must conduct a performance tune-up according to §63.11210(c) or (g), as applicable, and §63.11223(b). If you own or operate an existing biomass-fired boiler or existing oil-fired boiler, you must submit a signed statement in the Notification of Compliance Status report that indicates that you conducted an initial tune-up of the boiler.

(c) [NA – ENERGY ASSESSMENT NOT REQUIRED]

(d) [NA - SOURCES IN THIS GROUP ARE NOT SUBJECT TO EMISSION LIMITS]

[76 FR 15591, Mar. 21, 2011, as amended at 78 FR 7508, Feb. 1, 2013; 81 FR 63126, Sept. 14, 2016]

Continuous Compliance Requirements

§ 63.11220 When must I conduct subsequent performance tests or fuel analyses?

[NA - SOURCES IN THIS GROUP ARE NOT SUBJECT TO PERFORMANCE TESTING OR FUEL ANALYSES]

§ 63.11221 Is there a minimum amount of monitoring data I must obtain?

[NA - SOURCES IN THIS GROUP ARE NOT SUBJECT TO EMISSION LIMITS]

§ 63.11222 How do I demonstrate continuous compliance with the emission limits?

[NA - SOURCES IN THIS GROUP ARE NOT SUBJECT TO EMISSION LIMITS]

[76 FR 15591, Mar. 21, 2011, as amended at 81 FR 63127, Sept. 14, 2016]

§ 63.11223 How do I demonstrate continuous compliance with the work practice and management practice standards?

(a) For affected sources subject to the work practice standard or the management practices of a tune-up, you must conduct a performance tune-up according to paragraph (b) of this section and keep records as required in § 63.11225(c) to demonstrate continuous compliance. You must conduct the tune-up while burning the type of fuel (or fuels in the case of boilers that routinely burn two types of fuels at the same time) that provided the majority of the heat input to the boiler over the 12 months prior to the tune-up.

(b) Except as specified in paragraphs (c) through (f) of this section, you must conduct a tune-up of the boiler biennially to demonstrate continuous compliance as specified in paragraphs (b)(1) through (7) of this section. Each biennial tune-up must be conducted no more than 25 months after the previous tune-up. For a new or reconstructed boiler, the first biennial tune-up must be no later than 25 months after the initial startup of the new or reconstructed boiler.

(1) As applicable, inspect the burner, and clean or replace any components of the burner as necessary (you may delay the burner inspection until the next scheduled unit shutdown, not to exceed 36 months from the previous inspection). Units that produce electricity for sale may delay the burner inspection until the first outage, not to exceed 36 months from the previous inspection.

(2) Inspect the flame pattern, as applicable, and adjust the burner as necessary to optimize the flame pattern. The adjustment should be consistent with the manufacturer's specifications, if available.

(3) Inspect the system controlling the air-to-fuel ratio, as applicable, and ensure that it is correctly calibrated and functioning properly (you may delay the inspection until the next scheduled unit shutdown, not to exceed 36 months from the previous inspection). Units that produce electricity for sale may delay the inspection until the first outage, not to exceed 36 months from the previous inspection.

**SECTION E. Source Group Restrictions.**

(4) Optimize total emissions of CO. This optimization should be consistent with the manufacturer's specifications, if available, and with any nitrogen oxide requirement to which the unit is subject.

(5) Measure the concentrations in the effluent stream of CO in parts per million, by volume, and oxygen in volume percent, before and after the adjustments are made (measurements may be either on a dry or wet basis, as long as it is the same basis before and after the adjustments are made). Measurements may be taken using a portable CO analyzer.

(6) Maintain on-site and submit, if requested by the Administrator, a report containing the information in paragraphs (b)(6)(i) through (iii) of this section.

(i) The concentrations of CO in the effluent stream in parts per million, by volume, and oxygen in volume percent, measured at high fire or typical operating load, before and after the tune-up of the boiler.

(ii) A description of any corrective actions taken as a part of the tune-up of the boiler.

(iii) The type and amount of fuel used over the 12 months prior to the tune-up of the boiler, but only if the unit was physically and legally capable of using more than one type of fuel during that period. Units sharing a fuel meter may estimate the fuel use by each unit.

(7) If the unit is not operating on the required date for a tune-up, the tune-up must be conducted within 30 days of startup.

(c) [NA – SOURCES IN THIS GROUP DO NOT HAVE OXYGEN TRIM SYSTEM]

(d) [NA – SOURCES IN THIS GROUP ARE NOT DEFINED AS SEASONAL]

(e) [NA – UNIT(S) > 5 MMBTU]

(f) Limited-use boilers must conduct a tune-up every 5 years as specified in paragraphs (b)(1) through (7) of this section. Each 5-year tune-up must be conducted no more than 61 months after the previous tune-up. For a new or reconstructed limited-use boiler, the first 5-year tune-up must be no later than 61 months after the initial startup. You may delay the burner inspection specified in paragraph (b)(1) of this section and inspection of the system controlling the air-to-fuel ratio specified in paragraph (b)(3) of this section until the next scheduled unit shutdown, but you must inspect each burner and system controlling the air-to-fuel ratio at least once every 72 months. Limited-use boilers are not subject to the emission limits in Table 1 to this subpart, the energy assessment requirements in Table 2 to this subpart, or the operating limits in Table 3 to this subpart.

(g) [NA - SOURCES IN THIS GROUP ARE NOT SUBJECT TO EMISSION LIMITS]

[76 FR 15591, Mar. 21, 2011, as amended at 78 FR 7509, Feb. 1, 2013; 81 FR 63127, Sept. 14, 2016]

§ 63.11224 What are my monitoring, installation, operation, and maintenance requirements?

(a) [NA - SOURCES IN THIS GROUP ARE NOT SUBJECT TO EMISSION LIMITS]

(b) [NA - SOURCES IN THIS GROUP ARE NOT SUBJECT TO EMISSION LIMITS]

(c) [NA - SOURCES IN THIS GROUP ARE NOT SUBJECT TO EMISSION LIMITS]

(d) [NA – SOURCES IN THIS GROUP ARE NOT SUBJECT TO OPERATING LIMITS]

(e) [NA - SOURCES IN THIS GROUP ARE NOT SUBJECT TO EMISSION LIMITS]

(f) [NA – BLDS NOT USED OR REQUIRED]

[76 FR 15591, Mar. 21, 2011, as amended at 78 FR 7510, Feb. 1, 2013]

§ 63.11225 What are my notification, reporting, and recordkeeping requirements?

**SECTION E. Source Group Restrictions.**

(a) You must submit the notifications specified in paragraphs (a)(1) through (5) of this section to the administrator.

(1) You must submit all of the notifications in §§ 63.7(b); 63.8(e) and (f); and 63.9(b) through (e), (g), and (h) that apply to you by the dates specified in those sections except as specified in paragraphs (a)(2) and (4) of this section.

(2) An Initial Notification must be submitted no later than January 20, 2014 or within 120 days after the source becomes subject to the standard.

(3) [NA - SOURCES IN THIS GROUP ARE NOT SUBJECT TO PERFORMANCE TESTING]

(4) You must submit the Notification of Compliance Status no later than 120 days after the applicable compliance date specified in §63.11196 unless you own or operate a new boiler subject only to a requirement to conduct a biennial or 5-year tune-up or you must conduct a performance stack test. If you own or operate a new boiler subject to a requirement to conduct a tune-up, you are not required to prepare and submit a Notification of Compliance Status for the tune-up. If you must conduct a performance stack test, you must submit the Notification of Compliance Status within 60 days of completing the performance stack test. You must submit the Notification of Compliance Status in accordance with paragraphs (a)(4)(i) and (vi) of this section. The Notification of Compliance Status must include the information and certification(s) of compliance in paragraphs (a)(4)(i) through (v) of this section, as applicable, and signed by a responsible official.

(i) You must submit the information required in § 63.9(h)(2), except the information listed in § 63.9(h)(2)(i)(B), (D), (E), and (F). If you conduct any performance tests or CMS performance evaluations, you must submit that data as specified in paragraph (e) of this section. If you conduct any opacity or visible emission observations, or other monitoring procedures or methods, you must submit that data to the Administrator at the appropriate address listed in § 63.13.

(ii) "This facility complies with the requirements in § 63.11214 to conduct an initial tune-up of the boiler."

(iii) [NA – ENERGY ASSESSMENT NOT REQUIRED]

(iv) [NA – BLDS NOT USED OR REQUIRED]

(v) [NA – UNIT(S) DO NOT FIRE SOLID WASTE]

(vi) The notification must be submitted electronically using the Compliance and Emissions Data Reporting Interface (CEDRI) that is accessed through EPA's Central Data Exchange (CDX) (www.epa.gov/cdx). However, if the reporting form specific to this subpart is not available in CEDRI at the time that the report is due, the written Notification of Compliance Status must be submitted to the Administrator at the appropriate address listed in § 63.13.

(5) [NA - SOURCES IN THIS GROUP ARE NOT SUBJECT TO EMISSION LIMITS]

(b) You must prepare, by March 1 of each year, and submit to the delegated authority upon request, an annual compliance certification report for the previous calendar year containing the information specified in paragraphs (b)(1) through (4) of this section. You must submit the report by March 15 if you had any instance described by paragraph (b)(3) of this section. For boilers that are subject only to the energy assessment requirement and/or a requirement to conduct a biennial or 5-year tune-up according to §63.11223(a) and not subject to emission limits or operating limits, you may prepare only a biennial or 5-year compliance report as specified in paragraphs (b)(1) and (2) of this section.

(1) Company name and address.

(2) Statement by a responsible official, with the official's name, title, phone number, email address, and signature, certifying the truth, accuracy and completeness of the notification and a statement of whether the source has complied with all the relevant standards and other requirements of this subpart. Your notification must include the following certification(s) of compliance, as applicable, and signed by a responsible official:

(i) "This facility complies with the requirements in § 63.11223 to conduct a biennial or 5-year tune-up, as applicable, of each boiler."

(ii) [NA – UNIT(S) DO NOT FIRE SOLID WASTE]

**SECTION E. Source Group Restrictions.**

(iii) [NA - SOURCES IN THIS GROUP ARE NOT SUBJECT TO EMISSION LIMITS]

(3) If the source experiences any deviations from the applicable requirements during the reporting period, include a description of deviations, the time periods during which the deviations occurred, and the corrective actions taken.

(4) [NA - SOURCES IN THIS GROUP ARE NOT SUBJECT TO EMISSION LIMITS]

(c) You must maintain the records specified in paragraphs (c)(1) through (7) of this section.

(1) As required in § 63.10(b)(2)(xiv), you must keep a copy of each notification and report that you submitted to comply with this subpart and all documentation supporting any Initial Notification or Notification of Compliance Status that you submitted.

(2) You must keep records to document conformance with the work practices, emission reduction measures, and management practices required by § 63.11214 and § 63.11223 as specified in paragraphs (c)(2)(i) through (vi) of this section.

(i) Records must identify each boiler, the date of tune-up, the procedures followed for tune-up, and the manufacturer's specifications to which the boiler was tuned.

(ii) [NA – UNIT(S) DO NOT BURN SOLID WASTE]

(iii) [NA – ENERGY ASSESSMENT NOT REQUIRED]

(iv) [NA - SOURCES IN THIS GROUP ARE NOT SUBJECT TO EMISSION LIMITS]

(v) [NA – SOURCES IN THIS GROUP ARE NOT DEFINED AS SEASONAL]

(vi) For each boiler that meets the definition of limited-use boiler, you must keep a copy of the federally enforceable permit that limits the annual capacity factor to less than or equal to 10 percent and records of fuel use for the days the boiler is operating.

(3) [NA - SOURCES IN THIS GROUP ARE NOT SUBJECT TO FUEL ANALYSES]

(4) Records of the occurrence and duration of each malfunction of the boiler, or of the associated air pollution control and monitoring equipment.

(5) Records of actions taken during periods of malfunction to minimize emissions in accordance with the general duty to minimize emissions in § 63.11205(a), including corrective actions to restore the malfunctioning boiler, air pollution control, or monitoring equipment to its normal or usual manner of operation.

(6) [NA - SOURCES IN THIS GROUP ARE NOT SUBJECT TO EMISSION LIMITS]

(7) [NA – BLDS NOT USED OR REQUIRED]

(d) Your records must be in a form suitable and readily available for expeditious review. You must keep each record for 5 years following the date of each recorded action. You must keep each record on-site or be accessible from a central location by computer or other means that instantly provide access at the site for at least 2 years after the date of each recorded action. You may keep the records off site for the remaining 3 years.

(e) [NA - SOURCES IN THIS GROUP ARE NOT SUBJECT TO PERFORMANCE TESTING]

(f) [NA – UNIT(S) DO NOT BURN SOLID WASTE]

(g) If you have switched fuels or made a physical change to the boiler and the fuel switch or change resulted in the applicability of a different subcategory within this subpart, in the boiler becoming subject to this subpart, or in the boiler switching out of this subpart due to a fuel change that results in the boiler meeting the definition of gas-fired boiler, as

**SECTION E. Source Group Restrictions.**

defined in §63.11237, or you have taken a permit limit that resulted in you becoming subject to this subpart or no longer being subject to this subpart, you must provide notice of the date upon which you switched fuels, made the physical change, or took a permit limit within 30 days of the change. The notification must identify:

- (1) The name of the owner or operator of the affected source, the location of the source, the boiler(s) that have switched fuels, were physically changed, or took a permit limit, and the date of the notice.
- (2) The date upon which the fuel switch, physical change, or permit limit occurred.

[76 FR 15591, Mar. 21, 2011, as amended at 78 FR 7511, Feb. 1, 2013; 81 FR 63127, Sept. 14, 2016]

§63.11226 [Reserved]

Other Requirements and Information

§ 63.11236 Who implements and enforces this subpart? [INCORPORATED BY REFERENCE]

§ 63.11237 What definitions apply to this subpart? [INCORPORATED BY REFERENCE]

Regulatory Changes

Individual sources within this source group that are subject to 40 CFR Part 63 Subpart JJJJJJ shall comply with all applicable requirements of the Subpart. 40 CFR 63.13(a) requires submission of copies of all requests, reports and other communications to both the Department and the EPA. The EPA copies shall be forwarded to:

Director
Air Protection Division (3AP00)
U.S. EPA Region III
1650 Arch Street
Philadelphia, PA 19103-2029

The Department copies shall be forwarded to:

Regional Air Program Manager
PA Department of Environmental Protection
909 Elmerton Avenue
Harrisburg, PA 17110-8200

In the event that the Federal Subpart that is the subject of this Source Group is revised, the permittee shall comply with the revised version of the subpart, and shall not be required to comply with any provisions in this permit designated as having the subpart as their authority, to the extent that such permit provisions would be inconsistent with the applicable provisions of the revised subpart.

**SECTION E. Source Group Restrictions.**

Group Name: 003

Group Description: Pa Code 129.67b Requirements

Sources included in this group

ID	Name
101	SHEETFED PRESSES (SIX)
102	HEATSET WEB PRESSES (TWO)
103	CLEANUP SOLVENTS (FOR 8 PRESSES)
104	WETTING AGENTS FOR ALL PRESSES

I. RESTRICTIONS.

No additional requirements exist except as provided in other sections of this permit including Section B (State Only General Requirements).

II. TESTING REQUIREMENTS.

No additional testing requirements exist except as provided in other sections of this permit including Section B (State Only General Requirements).

III. MONITORING REQUIREMENTS.

No additional monitoring requirements exist except as provided in other sections of this permit including Section B (State Only General Requirements).

IV. RECORDKEEPING REQUIREMENTS.

No additional record keeping requirements exist except as provided in other sections of this permit including Section B (State Only General Requirements).

V. REPORTING REQUIREMENTS.

No additional reporting requirements exist except as provided in other sections of this permit including Section B (State Only General Requirements).

VI. WORK PRACTICE REQUIREMENTS.

No additional work practice requirements exist except as provided in other sections of this permit including Section B (State Only General Requirements).

VII. ADDITIONAL REQUIREMENTS.**# 001 [25 Pa. Code §129.67b]****Control of VOC emissions from offset lithographic printing presses and letterpress printing presses.**

§ 129.67b. Control of VOC emissions from offset lithographic printing presses and letterpress printing presses.

(a) Applicability.

(1) Except as specified in paragraph (3), this section applies to the owner and operator of an offset lithographic printing press or a letterpress printing press, or both, if the press meets one or a combination of the following:

(i) [NA-no add on control device]

(ii) Letterpress printing. One or more letterpress printing presses if the total actual VOC emissions from all inks (including varnishes), coatings and adhesives combined from all letterpress printing presses and all VOC emissions from related cleaning activities at the facility are equal to or greater than 450 pounds (204.1 kilograms) per month or 2.7 tons (2,455 kilograms) per 12-month rolling period, before consideration of add-on controls.

(iii) Offset lithographic printing. One or more offset lithographic printing presses if the total actual VOC emissions from all inks (including varnishes), coatings, adhesives and fountain solutions combined from all offset lithographic printing presses and all VOC emissions from related cleaning activities at the facility are equal to or greater than 450 pounds (204.1 kilograms) per month or 2.7 tons (2,455 kilograms) per 12-month rolling period, before consideration of add-on controls.

SECTION E. Source Group Restrictions.

(iv) Offset lithographic printing and letterpress printing. One or more offset lithographic printing presses and one or more letterpress printing presses if the total actual VOC emissions from all inks (including varnishes), coatings, adhesives and fountain solutions combined and all VOC emissions from related cleaning activities at the facility are equal to or greater than 450 pounds (204.1 kilograms) per month or 2.7 tons (2,455 kilograms) per 12-month rolling period, before consideration of add-on controls.

(v) Emissions below 450 pounds per month and 2.7 tons per 12-month rolling period. The total actual VOC emissions from all inks (including varnishes), coatings, adhesives and fountain solutions combined from all offset lithographic printing presses, all letterpress printing presses and all VOC emissions from related cleaning activities at the facility are less than 450 pounds (204.1 kilograms) per month and 2.7 tons (2,455 kilograms) per 12-month rolling period, before consideration of add-on controls.

(2) The owner or operator of an offset lithographic printing press subject to paragraph (1) may use the VOC emission retention factors and capture efficiency factors specified in subsection (l) to determine the amount of potential or actual VOC emissions that is available for capture and control from the inks (including varnishes), fountain solutions and cleaning solutions used on the offset lithographic printing press.

(3) VOCs from adhesives used at a facility that are not used or applied on or with an offset lithographic printing press or a letterpress printing press are not subject to this section and may be regulated under §129.77 or Chapter 130, Subchapter D (relating to control of emissions from the use or application of adhesives, sealants, primers and solvents; and adhesives, sealants, primers and solvents).

(b) [NA NOT A RACT PERMIT]

(c) Emission limits for cleaning solutions and fountain solutions used in or on printing presses subject to this section.

(1) Cleaning solutions. Beginning January 1, 2015, a person subject to subsection (a)(1)(i), (ii), (iii) or (iv) may not cause or permit the emission into the outdoor atmosphere of VOCs from cleaning solutions used in or on an offset lithographic printing press or a letterpress printing press unless the following conditions are met:

(i) The cleaning solutions used must meet one or both of the following VOC limits:

- (A) A VOC composite partial vapor pressure less than 10 millimeters of mercury at 68°F (20°C).
- (B) A VOC content less than 70% by weight.

(ii) The use of one or more cleaning solutions with a higher VOC composite partial vapor pressure or higher VOC content, or both, than is listed in subparagraph (i) is limited to 110 gallons per year, combined, of all cleaning solutions that exceed the limits in subparagraph (i).

(2) Fountain solutions. Except as specified in paragraph (3), beginning January 1, 2015, a person subject to subsection (a)(1)(i), (iii) or (iv) may not cause or permit the emission into the outdoor atmosphere of VOCs from a fountain solution used in an offset lithographic printing press unless the fountain solution meets one or more of the following VOC limits.

(i) For each heatset web offset lithographic printing press, the press-ready (as applied) fountain solution must meet one of the following limits:

- (A) A VOC content of 1.6% or less by weight.
- (B) A VOC content of 3% or less by weight if the fountain solution is refrigerated below 60°F (15.5°C).
- (C) A VOC content of 5% or less by weight and no alcohol in the fountain solution.
- (D) Another method that achieves a level of control of VOC emissions from the press-ready (as applied) fountain solution equal to or better than the methods listed in clauses (A)—(C).

(ii) For each sheet-fed offset lithographic printing press, the press-ready (as applied) fountain solution must meet one of the following limits:

- (A) A VOC content of 5% or less by weight.
- (B) A VOC content of 8.5% or less by weight if the fountain solution is refrigerated below 60°F (15.5°C).
- (C) A VOC content of 5% or less by weight and no alcohol in the fountain solution.
- (D) Another method that achieves a level of control of VOC emissions from the press-ready (as applied) fountain

SECTION E. Source Group Restrictions.

solution equal to or better than the methods listed in clauses (A)—(C).

(iii) For each non-heatset web offset lithographic printing press, the press-ready (as applied) fountain solution shall contain a VOC content of 5% or less by weight and no alcohol in the fountain solution.

(3) Fountain solution exceptions. The control requirements under paragraph (2) for a fountain solution do not apply to the owner or operator of either of the following:

- (i) A sheet-fed offset lithographic printing press with maximum sheet size 11 x 17 inches or smaller.
- (ii) An offset lithographic printing press with total fountain solution reservoir of less than 1 gallon.
- (d) Emission limits for heatset web offset lithographic printing presses and heatset web letterpress printing presses.

(1) Except as specified in paragraph (2) or (3), beginning January 1, 2015, a person subject to subsection (a)(1)(i) may not cause or permit the emission into the outdoor atmosphere of VOCs from a heatset web offset lithographic printing press or a heatset web letterpress printing press, or both, unless the overall weight of VOCs emitted to the atmosphere from the heatset dryer is reduced through the use of vapor recovery or oxidation or another method that is authorized under § 129.51(a) (relating to general). The heatset dryer pressure must be maintained lower than the press room area pressure so that air flows into the heatset dryer at all times when the press is operating.

- (i) [NA no VOC control required]
- (ii) The first installation date is the first date of operation for a source or a control device. This date will not change if the source or control device is moved to a new location or if the control device is later used to control a new source.
- (iii) The owner or operator of the printing press may request the Department's approval for an alternative limitation if the following requirements are met:

(A) The request is submitted to the Department in writing.

(B) The request demonstrates one of the following:

- (I) The inlet VOC concentration to the control device is so low that compliance with the 90% or 95% overall efficiency in subparagraph (i) is not achievable.
- (II) The press is using a combination dryer and oxidizer or other control equipment configuration that does not have an inlet that meets the requirement for testing specified in subsection (h).

(C) The request demonstrates the minimum outlet VOC concentration that the unit can achieve, not to exceed 20 ppm as hexane (40 ppm as propane) on a dry basis.

(iv) The alternative limitation requested under subparagraph (iii) must be approved by the Department in a plan approval, operating permit or Title V permit.

(2) This subsection does not apply for one or a combination of the following circumstances:

- (i) The press is used for book printing.
- (ii) The press has a maximum web width of 22 inches or less.
- (iii) The press is operated with one or a combination of the following inks, coatings or varnishes:
 - (A) Waterborne coatings.
 - (B) Ultra-violet light or electron beam radiation cured materials.
 - (C) Sheet-fed or non-heatset web inks.
 - (D) Sheet-fed or non-heatset web varnishes.

(3) This subsection does not apply to the owner or operator of the press if the Department has issued a plan approval, operating permit or Title V permit to the owner or operator prior to January 1, 2015, establishing a Federally-enforceable limitation to limit the potential emissions of VOC from the offset lithographic printing press or the letterpress printing press below 25 tpy, before consideration of add-on controls.

(e) Compliance and monitoring requirements.

(1) Add-on air pollution control device. The owner or operator of a heatset web offset lithographic printing press or heatset web letterpress printing press subject to this section using an add-on air pollution control device in accordance with subsection (d) shall comply with the following requirements:

SECTION E. Source Group Restrictions.

(i) The add-on air pollution control device shall be equipped with the applicable monitoring equipment and the monitoring equipment shall be installed, calibrated, operated and maintained according to manufacturer's specifications at all times the add-on air pollution control device is in use. If the add-on air pollution control device is a:

(A)-(C) [NA no add on control device]

(2) Fountain solution. The owner or operator of an offset lithographic printing press subject to this section that is required to meet one of the fountain solution VOC limits of subsection (c)(2) shall demonstrate compliance by using one or more of the following methods:

(i) Analysis of a sample of the press-ready (as applied) fountain solution for VOC content using EPA Reference Method 24, Determination of Volatile Matter Content, Water Content, Density, Volume Solids, and Weight Solids of Surface Coatings, codified in 40 CFR Part 60, Appendix A, including updates and revisions.

(ii) Maintenance onsite of MSDS, CPDS or other data provided by the manufacturer of the fountain solution that indicates the VOC content of the press-ready (as applied) fountain solution.

(iii) Calculation of the VOC content of the press-ready (as applied) fountain solution that combines the EPA Reference Method 24 analytical VOC content data for each of the concentrated components or additives used to prepare the press-ready fountain solution.

(A) The VOC content data for each of the concentrated components or additives shall be combined in the proportions in which the concentrated components or additives are mixed to make the batch of press-ready (as applied) fountain solution.

(B) The VOC content shall be calculated one time for each recipe of press-ready (as applied) fountain solution. The recipe name, VOC content for each concentrated component or additive and fountain solution mix ratio shall be recorded in a logbook.

(C) The EPA Reference Method 24 analysis of the concentrated components or additives used to prepare the press-ready (as applied) fountain solution may be performed by the supplier of the components or additives and these results provided to the owner or operator of the affected press.

(iv) Measurement of the recirculating reservoir temperature of a refrigerated press-ready (as applied) fountain solution specified in subsection (c)(2)(i)(B) or (ii)(B) with a thermometer or other temperature detection device capable of reading to 0.5°F (0.28°C) to ensure that the temperature of the refrigerated fountain solution containing alcohol is maintained below 60°F (15.5°C) at all times. The temperature on the thermometer or other temperature detection device shall be continuously monitored. The temperature reading shall be recorded at least once per operating day to verify that the refrigeration system is operating properly.

(v) Monitoring of the press-ready (as applied) fountain solution for alcohol concentration or VOC content with one or more of the following instruments:

(A) A refractometer or a hydrometer to monitor the fountain solution alcohol concentration. The instrument must:

(I) Be corrected for temperature one time per 8-hour shift.

(II) Have a visual, analog or digital readout with an accuracy of 0.5%.

(III) Be calibrated with a standard solution for the type of alcohol used in the fountain solution.

(B) A conductivity meter to determine the fountain solution VOC content. Reading for the fountain solution must be referenced to the conductivity of the incoming water.

(vi) Another method to determine compliance with the VOC content limits for fountain solutions in subsection (c)(2) if the following requirements are met:

(A) The facility owner or operator submits a request, in writing, to the appropriate regional office of the Department for approval of the alternative method.

(B) The request demonstrates that the alternative method provides results that accurately determine the fountain solution VOC content.

(C) The Department provides prior written approval of the alternative method.

SECTION E. Source Group Restrictions.

(3) Cleaning solution. The owner or operator of an offset lithographic printing press or a letterpress printing press subject to this section shall demonstrate compliance with the VOC content limit or VOC composite partial vapor pressure limit for cleaning solutions in subsection (c)(1) by one or more of the following methods:

- (i) Analysis of a sample of press-ready (as applied) cleaning solution for VOC content using EPA Reference Method 24.
- (ii) Use of the equation in subsection (j) to calculate the composite partial vapor pressure of the press-ready (as applied) cleaning solution.
- (iii) Use of the methods in subsection (k) to determine the VOC composite partial vapor pressure of a single concentrated component or additive used to prepare the press-ready (as applied) cleaning solution.
- (iv) Maintenance onsite of MSDS, CPDS or other data provided by the manufacturer of the press-ready (as applied) cleaning solution that indicates the VOC content or the VOC composite partial vapor pressure, or both, of the press-ready (as applied) cleaning solution.
- (v) Calculation of the VOC content or the VOC composite partial vapor pressure, or both, of the press-ready (as applied) cleaning solution that combines the EPA Reference Method 24 analytical VOC content data or analytical VOC composite partial vapor pressure data for each of the concentrated components or additives used to prepare the press-ready (as applied) cleaning solution.

(A) The VOC content data or VOC composite partial vapor pressure data for each of the concentrated components or additives shall be combined in the proportions in which the concentrated components or additives are mixed to make the batch of press-ready (as applied) cleaning solution.

(B) The VOC content or VOC composite partial vapor pressure shall be calculated one time for each recipe of press-ready (as applied) cleaning solution. The recipe name, VOC content or VOC composite partial vapor pressure for each concentrated component or additive and cleaning solution mix ratio shall be recorded in a log book.

(C) The EPA Reference Method 24 analysis of the concentrated components or additives used to prepare the press-ready (as applied) cleaning solution may be performed or the VOC composite partial vapor pressure data may be determined by the supplier of the components or additives and these results provided to the owner or operator of the affected press.

(vi) Another method to determine compliance with the VOC content limits for cleaning solutions in subsection (c)(1) if the following requirements are met:

- (A) The facility owner or operator submits a request, in writing, to the appropriate regional office of the Department for approval of the alternative method.
- (B) The request demonstrates that the alternative method provides results that accurately determine the cleaning solution VOC content or VOC composite partial vapor pressure.
- (C) The Department provides prior written approval of the alternative method.

(f) Recordkeeping requirements. Beginning January 1, 2015, the owner or operator of a printing press subject to this section shall maintain records sufficient to demonstrate compliance with this section. Records maintained for compliance demonstrations may include purchase, use, production and other records.

- (1) [NA no add on control]
- (2) An owner or operator subject to subsection (a)(1)(i), (ii), (iii) or (iv) shall maintain records of cleaning solutions and fountain solutions used at the facility, including:
 - (i) The following parameters for each press ready blanket, roller or other cleaning solution:
 - (A) The name and identification number for the blanket, roller or other cleaning solution.
 - (B) The VOC content (weight %) or VOC composite partial vapor pressure of each cleaning solution as applied.
 - (C) The volume used of each cleaning solution as applied, if the owner or operator is using cleaning solutions which exceed the limits in subsection (c)(1)(i).
 - (D) Records of cleaning solution monitoring as required under subsection (e)(3).
 - (ii) The following parameters for each press-ready (as applied) fountain solution:
 - (A) The VOC content (weight %).
 - (B) Records of fountain solution monitoring as required under subsection (e)(2).

(3) An owner or operator claiming exemption from a VOC control provision of this section based on potential or actual VOC emissions, as applicable, shall maintain records that demonstrate to the Department that the press or facility is

SECTION E. Source Group Restrictions.

exempt.

(4) The owner or operator may group materials into classes using the highest VOC content in any material in a class to represent that class of material.

(g) Reporting requirements. Beginning January 1, 2015, the owner or operator of an offset lithographic printing press or a letterpress printing press subject to this section shall meet the following reporting requirements:

(1) The records required under subsection (f) shall be maintained onsite for 2 years unless a longer period is required by a plan approval or operating permit issued under Chapter 127 (relating to construction, modification, reactivation and operation of sources). The records shall be submitted to the Department in an acceptable format upon receipt of a written request.

(2) The owner or operator of an offset lithographic printing press or letterpress printing press required to demonstrate VOC control efficiency in accordance with subsection (d) shall submit reports to the Department in accordance with Chapter 139 (relating to sampling and testing).

(h) Sampling and testing.

(1) Sampling and testing shall be performed as follows:

(i) Sampling of an ink, varnish, coating, fountain solution or cleaning solution and testing for the VOC content of the ink, varnish, coating, fountain solution or cleaning solution shall be performed in accordance with the procedures and test methods specified in Chapter 139.

(ii) Sampling and testing of an add-on air pollution control device shall be performed in accordance with the procedures and test methods specified in Chapter 139 and meet one of the following:

(A) Sampling and testing shall be performed no later than 180 days after the compliance date of the press.

(B) Sampling and testing shall have been performed within 5 years prior to January 1, 2015, and previously approved by the Department.

(2) The control efficiency shall be determined using one or more of the following methods, as applicable, subject to prior written approval by the Department. The method used to measure the inlet concentration of VOC may be the same method used to determine the outlet concentration of VOC unless use of the same method is determined to be technically infeasible.

(i) EPA Reference Method 25, Determination of Total Gaseous Nonmethane Organic Emissions as Carbon, codified in 40 CFR Part 60, Appendix A, including updates and revisions. EPA Reference Method 25 may be used if the total gaseous nonmethane organic compound concentration is equal to or greater than 50 parts per million by volume, measured as carbon.

(ii) EPA Reference Method 25A, Determination of Total Gaseous Organic Concentration Using a Flame Ionization Analyzer, codified in 40 CFR Part 60, Appendix A, including updates and revisions. EPA Reference Method 25A may not be used if the total gaseous nonmethane organic compound concentration at the outlet of the add-on air pollution control device is equal to or greater than 50 parts per million by volume, measured as carbon.

(iii) EPA Reference Method 18, Measurement of Gaseous Organic Compound Emissions by Gas Chromatography, codified in 40 CFR Part 60, Appendix A, including updates and revisions. EPA Reference Method 18 may be used if the total gaseous nonmethane organic compound concentration is equal to or greater than 50 parts per million by volume, measured as carbon. EPA Reference Method 18 may be used in conjunction with EPA Reference Method 25A to subtract emissions of exempt VOCs.

(3) Other test methods demonstrated to provide results that are acceptable for purposes of determining compliance with this section may be used if prior approval is obtained in writing from the Department and the EPA.

(i) Work practice requirements for cleaning activities.

(1) Except as specified in paragraph (3), beginning January 1, 2015, the owner or operator of an offset lithographic

SECTION E. Source Group Restrictions.

printing press or a letterpress printing press subject to subsection (a)(1)(i), (ii), (iii) or (iv) shall comply with the following work practices for cleaning activities at the facility:

- (i) Store all VOC-containing cleaning solutions, waste cleaning solutions and used shop towels in closed containers.
- (ii) Ensure that mixing vessels and storage containers used for VOC-containing cleaning solutions, waste cleaning solutions and used shop towels are kept closed at all times, except when depositing or removing these solutions or shop towels.
- (iii) Minimize spills of VOC-containing cleaning solutions and waste cleaning solutions and clean up spills immediately.
- (iv) Convey VOC-containing cleaning solutions, waste cleaning solutions and used shop towels from one location to another in closed containers or pipes.

(2) The requirements in paragraph (1) apply to the following activities:

- (i) Cleaning of a press, including blanket washing, roller washing, plate cleaners, metering roller cleaners, impression cylinder cleaners and rubber rejuvenators.
- (ii) Cleaning of press parts, including press parts that have been removed from the press for cleaning.
- (iii) Cleaning of ink, coating or adhesive from areas around a press.

(3) The requirements in paragraph (1) do not apply to the following activities:

- (i) Cleaning electronic components of a press.
- (ii) Cleaning in pre-press (for example, platemaking) operations.
- (iii) Cleaning in post-press (for example, binding) operations.
- (iv) Using janitorial supplies (for example, detergents or floor cleaners) for general cleaning around a press.
- (v) The use of parts washers or cold cleaners at an offset lithographic printing or a letterpress printing facility. The use of parts washers and cold cleaners is regulated under §129.63 (relating to degreasing operations).

(j) Composite partial vapor pressure. The composite partial vapor pressure of organic compounds in cleaning solutions shall be determined by one of the following procedures:

- (1) Quantifying the amount of each compound in the blend using gas chromatographic analysis, using an appropriate and current ASTM test method with prior written approval by the Department.
- (2) [EQUATION FOUND IN PA CODE 129.67B]

(k) Determination of vapor pressure of single organic compounds in cleaning solutions. The vapor pressure of each single component compound shall be determined from one or more of the following:

- (1) An appropriate and current ASTM test method with prior written approval by the Department.
- (2) The most recent edition of one or more of the following sources:
 - (i) Vapour Pressures of Pure Substances, Boublik, Elsevier Scientific Publishing Company, New York.
 - (ii) Perry's Chemical Engineers' Handbook, Green and Perry, McGraw-Hill Book Company.
 - (iii) CRC Handbook of Chemistry and Physics, CRC Press.
 - (iv) Lange's Handbook of Chemistry, McGraw-Hill Book Company.
 - (v) Additional sources approved by the Department.

(l) VOC retention factors and capture efficiency factors. As specified in subsection (a)(2), if:

- (1) A portion of the VOCs contained in the ink or cleaning solution, or both, is retained in the printed web substrate or in the shop towels used for cleaning, the following VOC emission retention factors shall be used, as applicable:
 - (i) A 20% VOC emission retention factor for a petroleum ink oil-based heatset ink printed on an absorptive substrate, meaning 80% of the petroleum ink oil content is emitted as VOC during the printing process and is available for capture and control by an add-on air pollution control device. The petroleum ink oil content of a heatset ink may be determined from formulation data included on a CPDS or MSDS.
 - (ii) A 95% VOC emission retention factor for a petroleum ink oil-based non-heatset web or non-heatset sheet-fed ink, meaning 5% of the petroleum ink oil content is emitted as VOC during the printing process and is available for capture and control by an add-on air pollution control device. The petroleum ink oil content of a non-heatset web or non-heatset sheet-fed ink may be determined from formulation data included on a CPDS or MSDS.
 - (iii) A 100% VOC emission retention factor for vegetable ink oil-based heatset and non-heatset inks.
 - (iv) A 50% VOC emission retention factor for low VOC composite vapor pressure cleaning solutions in shop towels if both of the following conditions are met:
 - (A) The VOC composite vapor pressure of the cleaning solution is less than 10mm Hg at 20°C (68°F).
 - (B) The cleaning solutions and used shop towels are kept in closed containers.

**SECTION E. Source Group Restrictions.**

(2) A portion of the VOCs contained in one or more of the ink, fountain solution or automatic blanket wash materials is captured in the press dryer for control by the add-on air pollution control device, the following capture efficiency factors shall be used, as applicable:

(i) A 100% VOC emission capture efficiency for volatilized ink oils for oil-based heatset paste inks and varnishes as specified in paragraph (1) if both of the following conditions are met:

(A) The press dryer is operating at negative pressure relative to the surrounding pressroom.

(B) The air flow is into the press dryer.

(ii) A 70% VOC emission capture efficiency for a fountain solution that contains an alcohol substitute.

(iii) A 40% VOC emission capture efficiency for an automatic blanket wash if the VOC composite vapor pressure of the cleaning solution is less than 10mm Hg at 20°C (68°F).



SECTION F. Alternative Operation Requirements.

No Alternative Operations exist for this State Only facility.



SECTION G. Emission Restriction Summary.

No emission restrictions listed in this section of the permit.

**SECTION H. Miscellaneous.**

001: The following sources and activities are not subject to any other specific work practice standards, testing, monitoring, recordkeeping, or reporting requirements:

Natural gas fired units (Source #204):

York-Shibley 6 mmBtu/hour natural gas boiler

Y-S oil boiler (ID205) primarily burns natural gas, 4.1 mmBtu/hr

Source ID 102 uses (2) natural gas fired ovens:

Press 501 is 3.31mmBtu/hr at startup and 1.655 mmBtu/hr during run

Press 502 is 5.86 mmBtu/hr during startup and 2.93 mmBtu/hr during run

Two scrap paper balers (Source #206)

Torit cartridge filter unit in the baler area

(2) Canon C1000VP Digital Presses. Installed 3/15/18 and 5/16/18.

(2) Oce VarioPrint 6250, second added in 11/2014

NOTE: The capacities listed in Section A, page 4, are for informational use only and shall not be used as enforceable limitations.

002: Source ID 101 sheetfed presses consists of five, THINKTech presses and one Komori lithographic sheet fed press

003: Source ID 102 heatset web presses operate with natural gas fired dryers

press 501: 1.655 mmBtu/hr

press 502: 2.93 mmBtu/hr

004: emergency Engines

Boiler room-1977, 27.5 Hp, Diesel CI emergency use only. runs 20min/week for testing

Pump House- 1960's, 85 Hp, Diesel CI emergency use only, runs 10min/weekly for testing.



***** End of Report *****

